

Customer	Date	1/14/2021
Contact	Project	
Phone number	Project no.	
Email		

3SV16N015M

1016L2374

Operating data

Pump type	Single head pump	Fluid	Water, pure
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	l/s 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m ³ 1000
Static head	m 0	Kin. viscosity at t A	mm ² /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

Pump data

Make	Lowara	Nominal	l/s ()
Speed	rpm 2900	Flow	Max- l/s 1.2
Number of stages	16	Min-	l/s
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 1176.6	Head	at Qmax m 53.4
Head H(Q=0)	m 120	at Qmin	m 119.9
Weight	kg 28	Shaft power	kW ()
Max.	m 124.4	Max. shaft power	kW 1.4
Impeller R	designed m 124.4	Efficiency	%
Min.	m 124.4	NPSH 3%	m

Pump Materials

Pump body	Stainless steel / AISI 316L
Impeller	Stainless steel / AISI 316L
Diffuser	Stainless steel / AISI 316L
Outer sleeve	Stainless steel / AISI 316L
Shaft	Stainless steel / AISI 316
Adapter	Cast iron
Base	Aluminium
Coupling	Aluminium
SEAL HOUSING	Stainless steel / AISI 316L
Coupling protection	Stainless steel / AISI 304
Shaft sleeve and bushing	Tungsten carbide
Fill / drain plugs	Stainless steel / AISI 316
Tie rods	Stainless steel / AISI 431
Wear Ring	Technopolymer PPS

Shaft Seal

e-SV Mechanical seal	Roten
e-SV - Uniten (-30 / +120 °C)	
1 - Rotating part	Silicon Carbide
2 - Stationary part	Resin impregnated carbon
3 - Elastomers	EPDM
4 - Springs	AISI 316
5 - Other components	AISI 316

Motor data

Manufacturer	Lowara	Electric voltage	230 V	Speed	2810 rpm	Insulation class	155 (F)
Specific design	Single phase surface motor (e-SV)			Frame size	90R	Colour	RAL 5010
Type	SM90RB14/115 (220-240V)						
Rated power	1.5 kW	Degree of protection IP55					
Electric current	8.58 A						

Remarks:


Customer	Date	1/14/2021
Contact	Project	
Phone number	Project no.	
Email		

3SV16N015M
1016L2374

Hydraulic data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 l/s	Flow		Impeller R	124.41 m
Head	0 m	Head		Frequency	50 Hz
Static head	0 m	MEI >=0,7		Speed	2900 rpm

Power data referred to:
 Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s
 Performance according to ISO 9906:2012 – Grade 3B

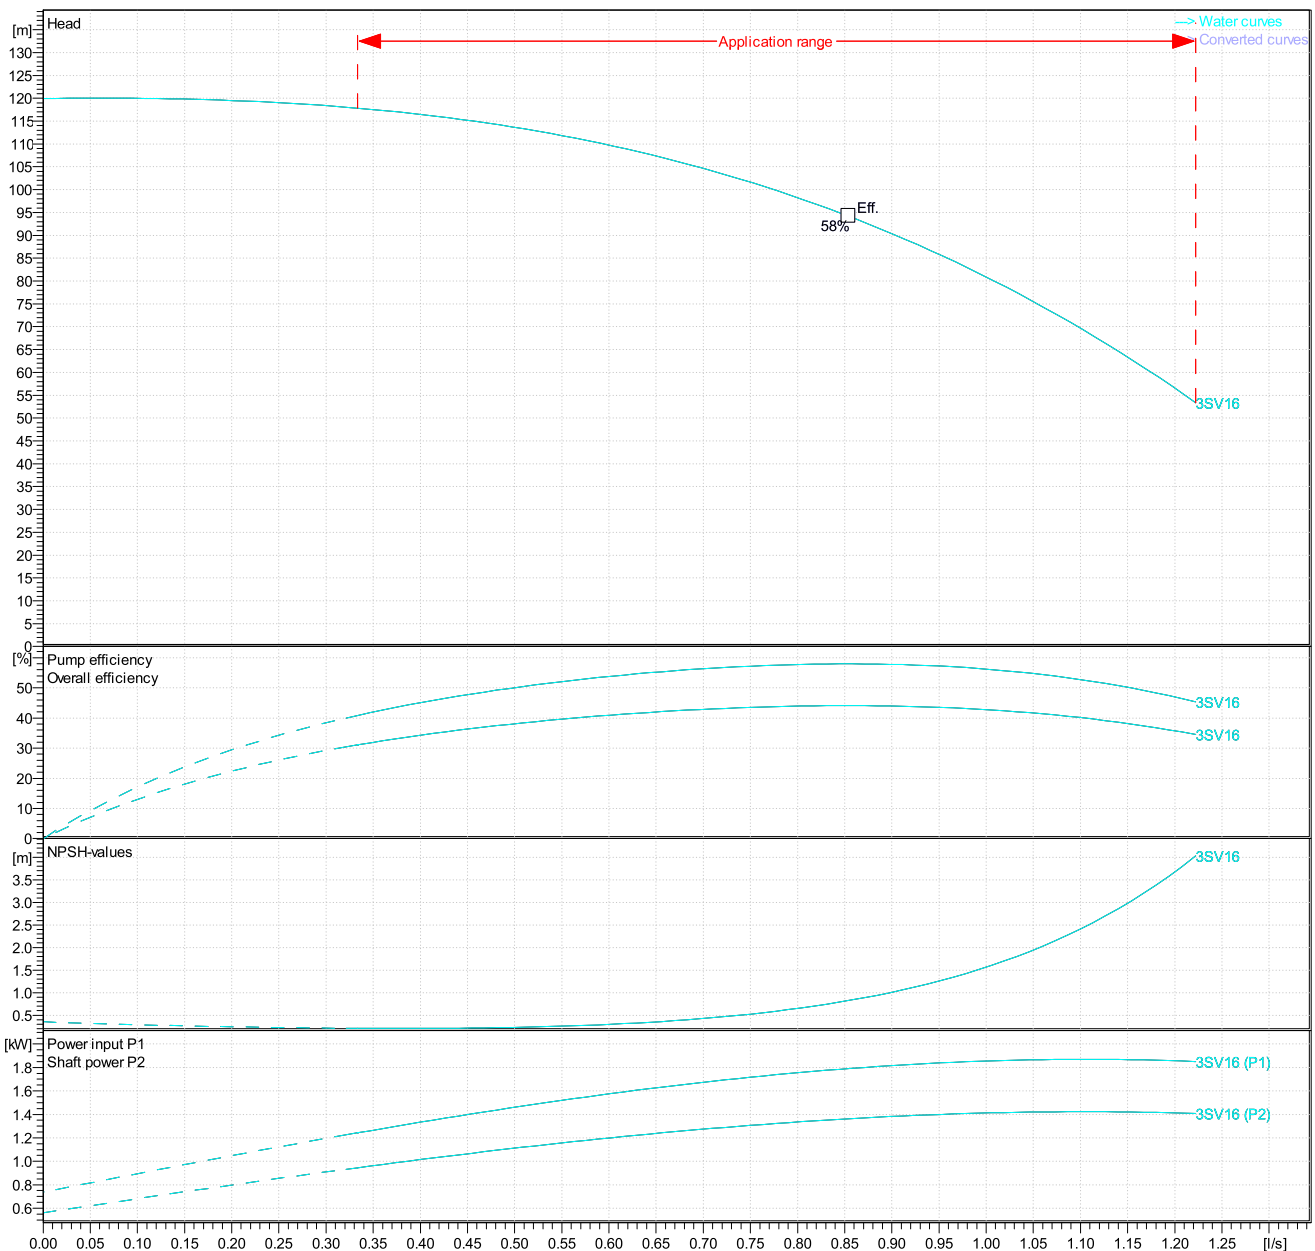


Customer	Date	1/14/2021
Contact	Project	
Phone number	Project no.	
Email		

3SV16N015M

1016L2374

Drawing

Dimensional Data

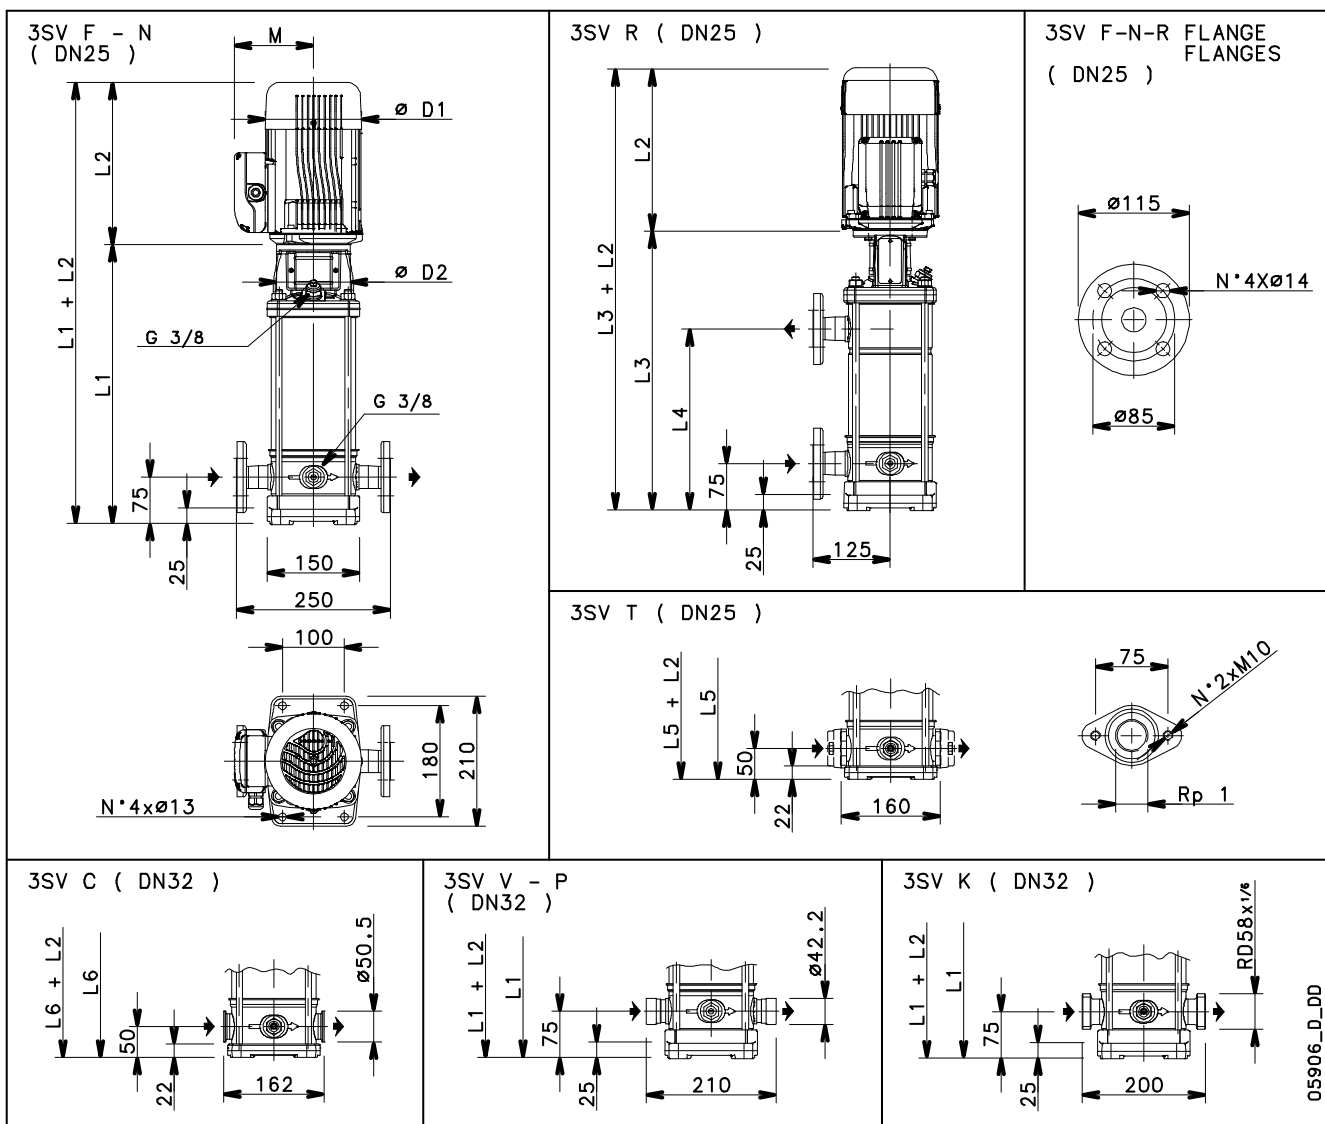

Dimensions m

D1	244.09															Weight	
D2	220.47															28.2	kg
L1	878.74																
L2	414.17																
L3	878.74																
L4	609.45																
L5	839.37																
L6	839.37																
M	215.75																

05906_D_DD