

Technical data

Company name Contact Phone number e-mail address

О	pe	rati	na	da	ta
_	pυ	ıuu	9	uu	ш

Pumpe type	Single head pum)	Fluid	Water, pure
No. of pumps / Reserv	е	1 / 0	Operating temperature t A °C	4
Nominal flow	m³/h	0	pH-v alue at t A	7
Nominal head	m	0	Density at t A kg/m³	1000
Static head	m	0	Kin. viscosity at t A mm ² /s	1.569
Inlet pressure	kPa	0	Vapor pressure at t A kPa	100
Environmental temperatur	re °C	20	Solids	0
Available system NPSH	m	0	Altitude m	0

Pump data

Make	Lowara				Nominal	m³/h		()
Speed		rpm	2900	Flow	Max-	m³/h	19		
Number of stag	ges		1		Min-	m³/h			
Max. casing pre	essure	kPa			Nominal	m			
Max. working pr	essure	kPa	238.4	Head	at Qmax	m	5.6		
Head H(Q=0)		m	24		at Qmin	m	24.3		
Weight		kg	31	Shaft power		kW		()
	Max.	mm		Max. shaft power		kW			
Impeller R	designed	mm		Efficiency (Hydrau	ılic+Motor+Drive)	%			
	Min.	mm		NPSH 3%		m			

Pump Materials

ımp Materials		Shaft Seal	
Volute Casing	Cast iron	Unbalanced mechanical seal	Burgmann
Casing Cover	Cast iron	eMG12 (-25 / +90 °C)	
Impeller	Stainless steel / AISI 304	1. Rotating ring	Carbon graphite resin impregnated
Stub shaft	Stainless steel / AISI 316L	2. Stationary ring	SiC, silicon carbide, sintered press.less
Wear Ring	Stainless steel / AISI 304	3. Secondary seal	Ethylene propylene rubber (EPDM)
Impeller lock nut and washer	Stainless steel / AISI 304	4. Springs	CrNiMo - Steel
Impeller key	Stainless steel / AISI 316L	5. Others	EPDM - WRAS
Fill and drain plugs	Nickel-plated brass	Gaskets of the pump	Ethylene propylene rubber (EPDM)
, ,	•	Code	B/ESIC-Q7EGG/Y10-WA

Motor data

Manufacturer	Lowara n Three phase e-SM n	Electric voltage	460 V	Speed Frame size	2900 rpm 90R	Insulation class Colour	B RAL 5010
Туре	ESM90R/307 LNE		2.31 A				
Rated power	0.75 kW	Degree of protecti	on IP 55				

Remarks:

9/29/2021 Project Created by Last update LNEEE32-160/07/EP05CS4 9/29/2021 Block Created on



Performance curve


Company name Contact Phone number e-mail address

Hydraulic data

Operating Data Sp	ecification	Hydraulic data (duty point)	Impeller design	
Flow	0 m³/h	Flow	Impeller R	0 mm
Head	0 m	Head	Frequency	50 Hz
Static head	0 m		Speed	2900 rpm

Power datas referced to:

Water, pure [100%]; 4°C; 1000kg/m³; 1.57mm²/s Performance according to ISO 9906:2012 – Grade 3B

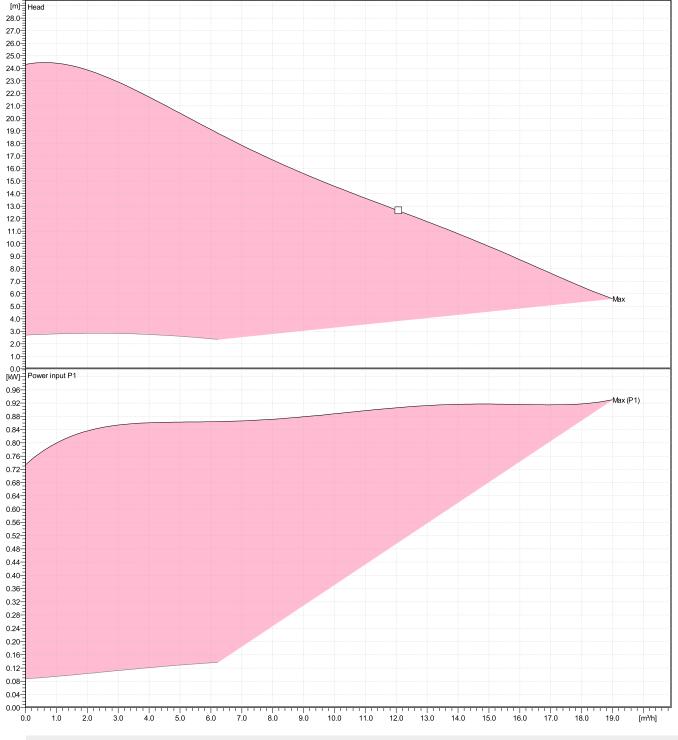




Dimensions

Company name Contact Phone number e-mail address


Dimensions	mm/l		
bil b2 Bmax DND DNS e H h1 h2 L	123 121 280 32 32 32 90 320 160 160 432 260		20.5 \
		Total weight	30.5 kg

Connections Suction nozzle Discharge nozzle

mm



Drawing

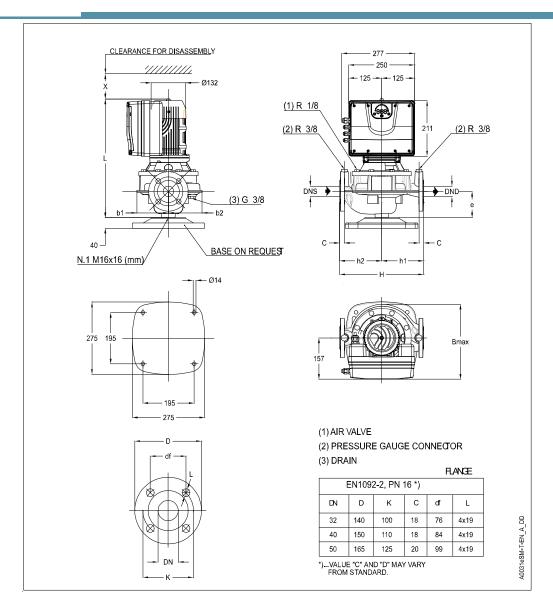




Total lifetime	15	Inflation rate (rate of price increases)	2 %
Annual operating time	5600	Interest rate (for investment)	3 %
Energy cost per kWh	0.00 GBP		

Power input P1


Total costs



0%	0.00 GBP	Energy
0%	0.00 GBP	Investment costs
0%	0.00 GBP	Installation & commissioning
0%	0.00 GBP	Operating cost
0%	0.00 GBP	Maintenance & repair
0%	0.00 GBP	Downtime
0%	0.00 GBP	Environmental
0%	0.00 GBP	Decommissioning

GBP

First year costs



0%	0.00 GBP	Energy (1st year)
0%	0.00 GBP	Investment costs (1st year)
0%	0.00 GBP	Installation & commissioning (1st year)
0%	0.00 GBP	Operating cost (1st year)
0%	0.00 GBP	Maintenance & repair (1st year)
0%	0.00 GBP	Downtime (1st year)
0%	0.00 GBP	Environmental (1st year)
0%	0.00 GBP	Decommissioning (1st year)

GBP

Disclaimer: The calculations and the results are based on user input values and general assumptions and provide only estimated

 Project
 Created by
 Last update
 9/29/2021

 Block
 LNEE52-160/07/EP05CS4
 Created on
 9/29/2021