

Qty. Description

1 SPK 1-8/8 A-W-A-AUUV



Note! Product picture may differ from actual product

Product No.: [39AH5308](#)

Multistage, immersible, self-priming, centrifugal pump for vertical and horizontal installation in tanks etc.

The pump has the following characteristics:

- Installation length according to DIN 5440.
- Impellers, intermediate chambers and spline shaft are made of stainless steel and motor stool of GG 20.
- Mechanical shaft seal according to EN 12756.
- Power transmission via cast iron split coupling.

The motor is a 3-phase AC motor.

Immersion depth: 287 mm

Liquid:

Pumped liquid: Water
 Liquid temperature range: -10 .. 90 °C
 Selected liquid temperature: 20 °C
 Density at selected liquid temperature: 998.2 kg/m³

Technical:

Pump speed on which pump data are based: 2825 rpm
 Rated flow: 1 m³/h
 Rated head: 20.1 m
 Primary shaft seal: AUUV
 Curve tolerance: ISO9906:2012 3B
 Drain holes: Open drain hole

Materials:

Pump head: Cast iron
 EN-GJL-200
 ASTM 25B
 Impeller: Stainless steel
 DIN W.-Nr. 1.4301
 AISI 304

Installation:

Maximum ambient temperature: 40 °C
 Pipe connection: G 3/4
 Flange size for motor: FT75

Electrical data:

Motor type: SIEMENS
 Rated power - P2: 0.18 kW



Company name:

Created by:

Phone:

Date:

15/10/2019


Qty.	Description
------	-------------

Power (P2) required by pump:	0.18 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415Y V
Rated current:	0.90/0.52 A
Cos phi - power factor:	0.79-0.71
Rated speed:	2800-2850 rpm
Number of poles:	2
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor No:	81602313

Others:

Minimum efficiency index, MEI	: N/A
Net weight:	10.5 kg
Gross weight:	11.8 kg
Country of origin:	HU
Custom tariff no.:	84137075

39AH5308 SPK 1-8/8 A-W-A-AUUV 50 Hz

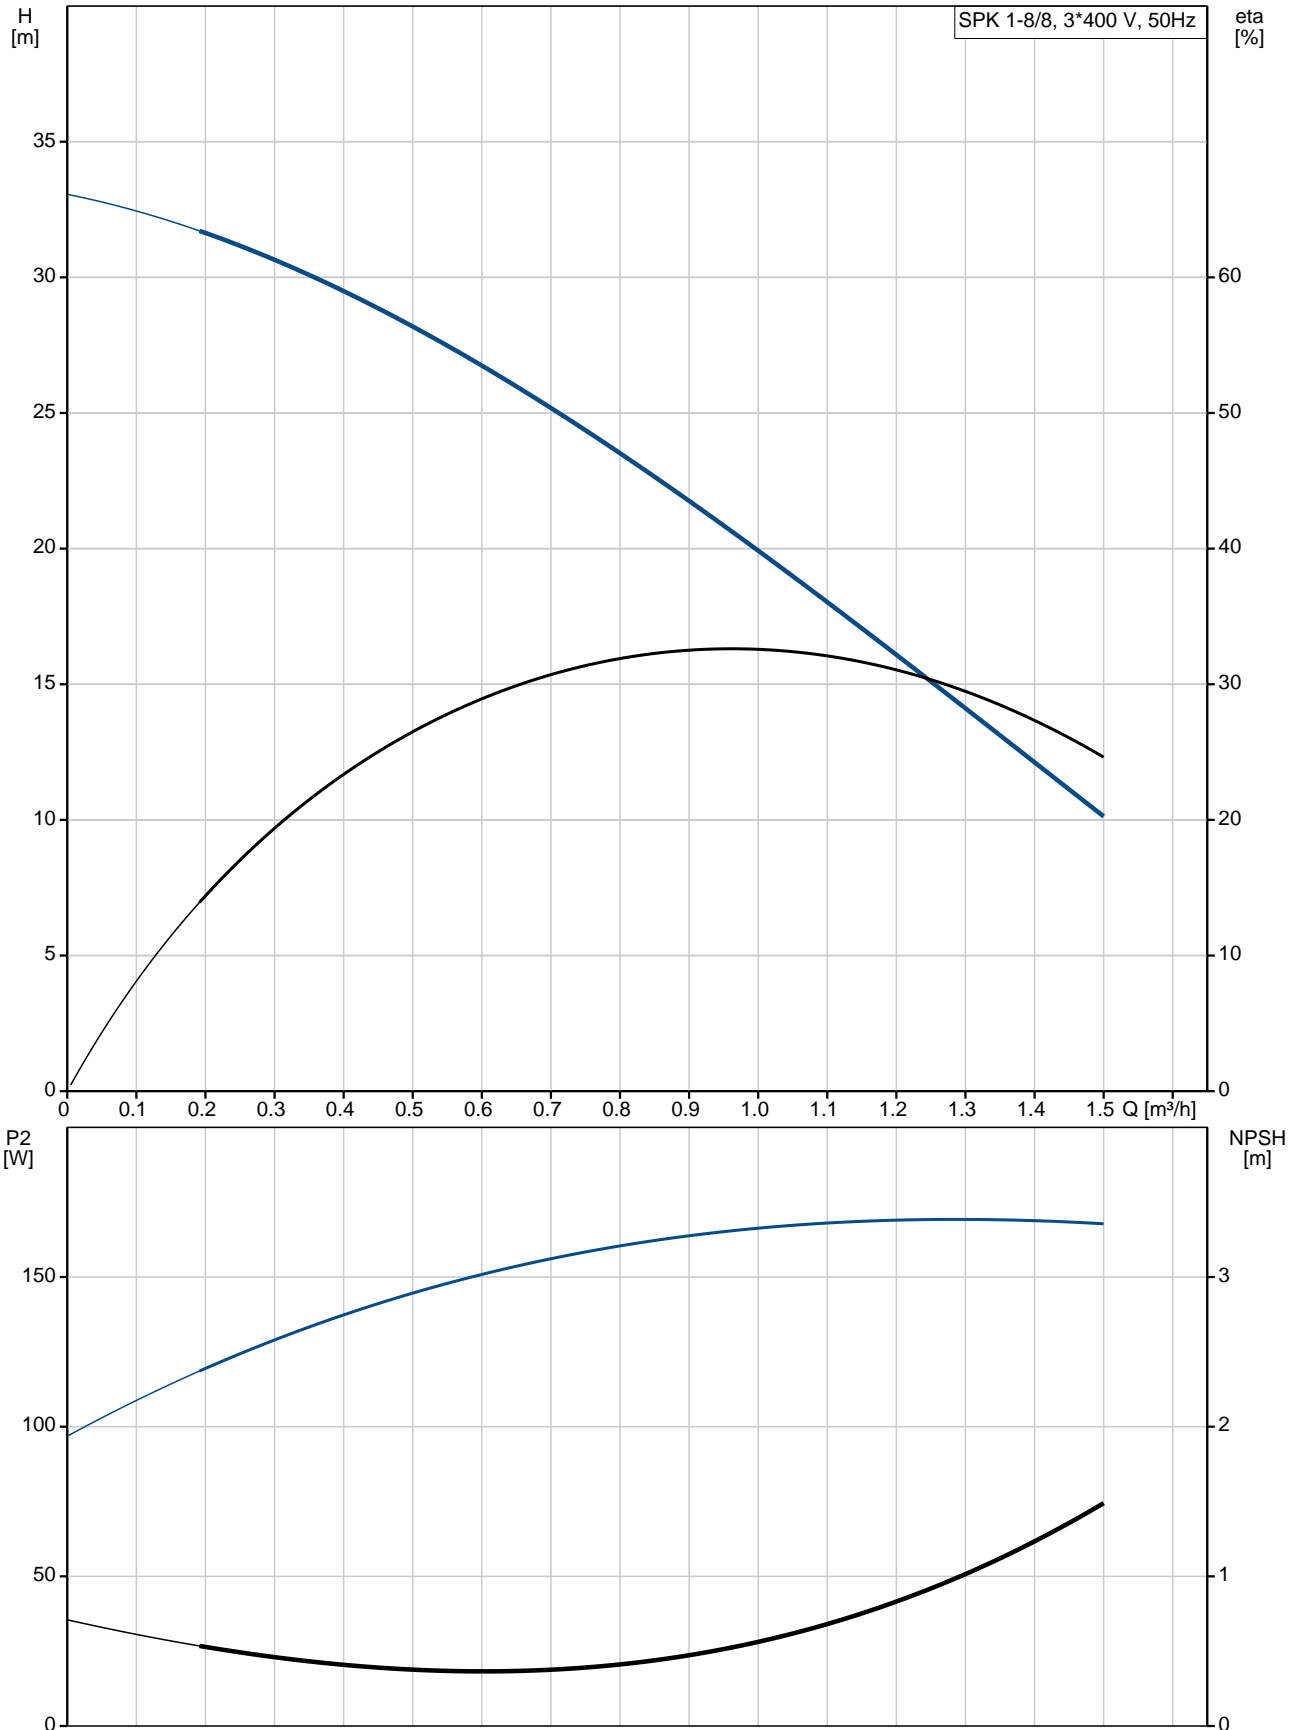

Description	Value
General information:	
Product name:	SPK 1-8/8 A-W-A-AUUV
Product No:	39AH5308
EAN number:	5700390804732
Price:	5700390804732
Price:	708,00 GBP
Technical:	
Pump speed on which pump data are based:	2825 rpm
Rated flow:	1 m ³ /h
Rated head:	20.1 m
Stages:	8
Impellers:	8
Primary shaft seal:	AUUV
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	E
Drain holes:	Open drain hole
Materials:	
Pump head:	Cast iron
	EN-GJL-200
	ASTM 25B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	A
Installation:	
Maximum ambient temperature:	40 °C
Pipe connection:	G 3/4
Flange size for motor:	FT75
Connect code:	W
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 90 °C
Selected liquid temperature:	20 °C
Density at selected liquid temperature:	998.2 kg/m ³
Electrical data:	
Motor type:	SIEMENS
Rated power - P2:	0.18 kW
Power (P2) required by pump:	0.18 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415V
Rated current:	0.90/0.52 A
Cos phi - power factor:	0.79-0.71
Rated speed:	2800-2850 rpm
Number of poles:	2
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	NONE
Motor No:	81602313
Others:	
Minimum efficiency index, MEI :	N/A
Net weight:	10.5 kg
Gross weight:	11.8 kg
Country of origin:	HU
Custom tariff no.:	84137075

