

Qty. Description

1 SPK 2-1/1 A-W-A-AUUV



Note! Product picture may differ from actual product

Product No.: [39DH5001](#)

Multistage, immersible, self-priming, centrifugal pump for vertical and horizontal installation in tanks etc.

The pump has the following characteristics:

- Installation length according to DIN 5440.
- Impellers, intermediate chambers and spline shaft are made of stainless steel and motor stool of GG 20.
- Mechanical shaft seal according to EN 12756.
- Power transmission via cast iron split coupling.

The motor is a 3-phase AC motor.

Immersion depth: 140 mm

Liquid:

Pumped liquid: Water
 Liquid temperature range: -10 .. 90 °C
 Selected liquid temperature: 20 °C
 Density at selected liquid temperature: 998.2 kg/m³

Technical:

Pump speed on which pump data are based: 2800 rpm
 Rated flow: 2 m³/h
 Rated head: 3.6 m
 Primary shaft seal: AUUV
 Curve tolerance: ISO9906:2012 3B
 Drain holes: Open drain hole

Materials:

Pump head: Cast iron
 EN-GJL-200
 ASTM 25B
 Impeller: Stainless steel
 DIN W.-Nr. 1.4301
 AISI 304

Installation:

Maximum ambient temperature: 40 °C
 Pipe connection: G 3/4
 Flange size for motor: FT75

Electrical data:

Motor type: SIEMENS
 Rated power - P2: 0.06 kW



Company name:

Created by:


Phone:

Date:

15/10/2019

Qty.	Description
	<p>Power (P2) required by pump: 0.06 kW Mains frequency: 50 Hz Rated voltage: 3 x 220-240D/380-415Y V Rated current: 0.31/0.18 A Cos phi - power factor: 0.79-0.72 Rated speed: 2800-2850 rpm Number of poles: 2 Enclosure class (IEC 34-5): 55 (Protect. water jets/dust) Insulation class (IEC 85): F Motor No: 81602310</p> <p>Others: Minimum efficiency index, MEI : N/A Net weight: 9.3 kg Gross weight: 10.6 kg Country of origin: HU Custom tariff no.: 84137075</p>

39DH5001 SPK 2-1/1 A-W-A-AUUV 50 Hz

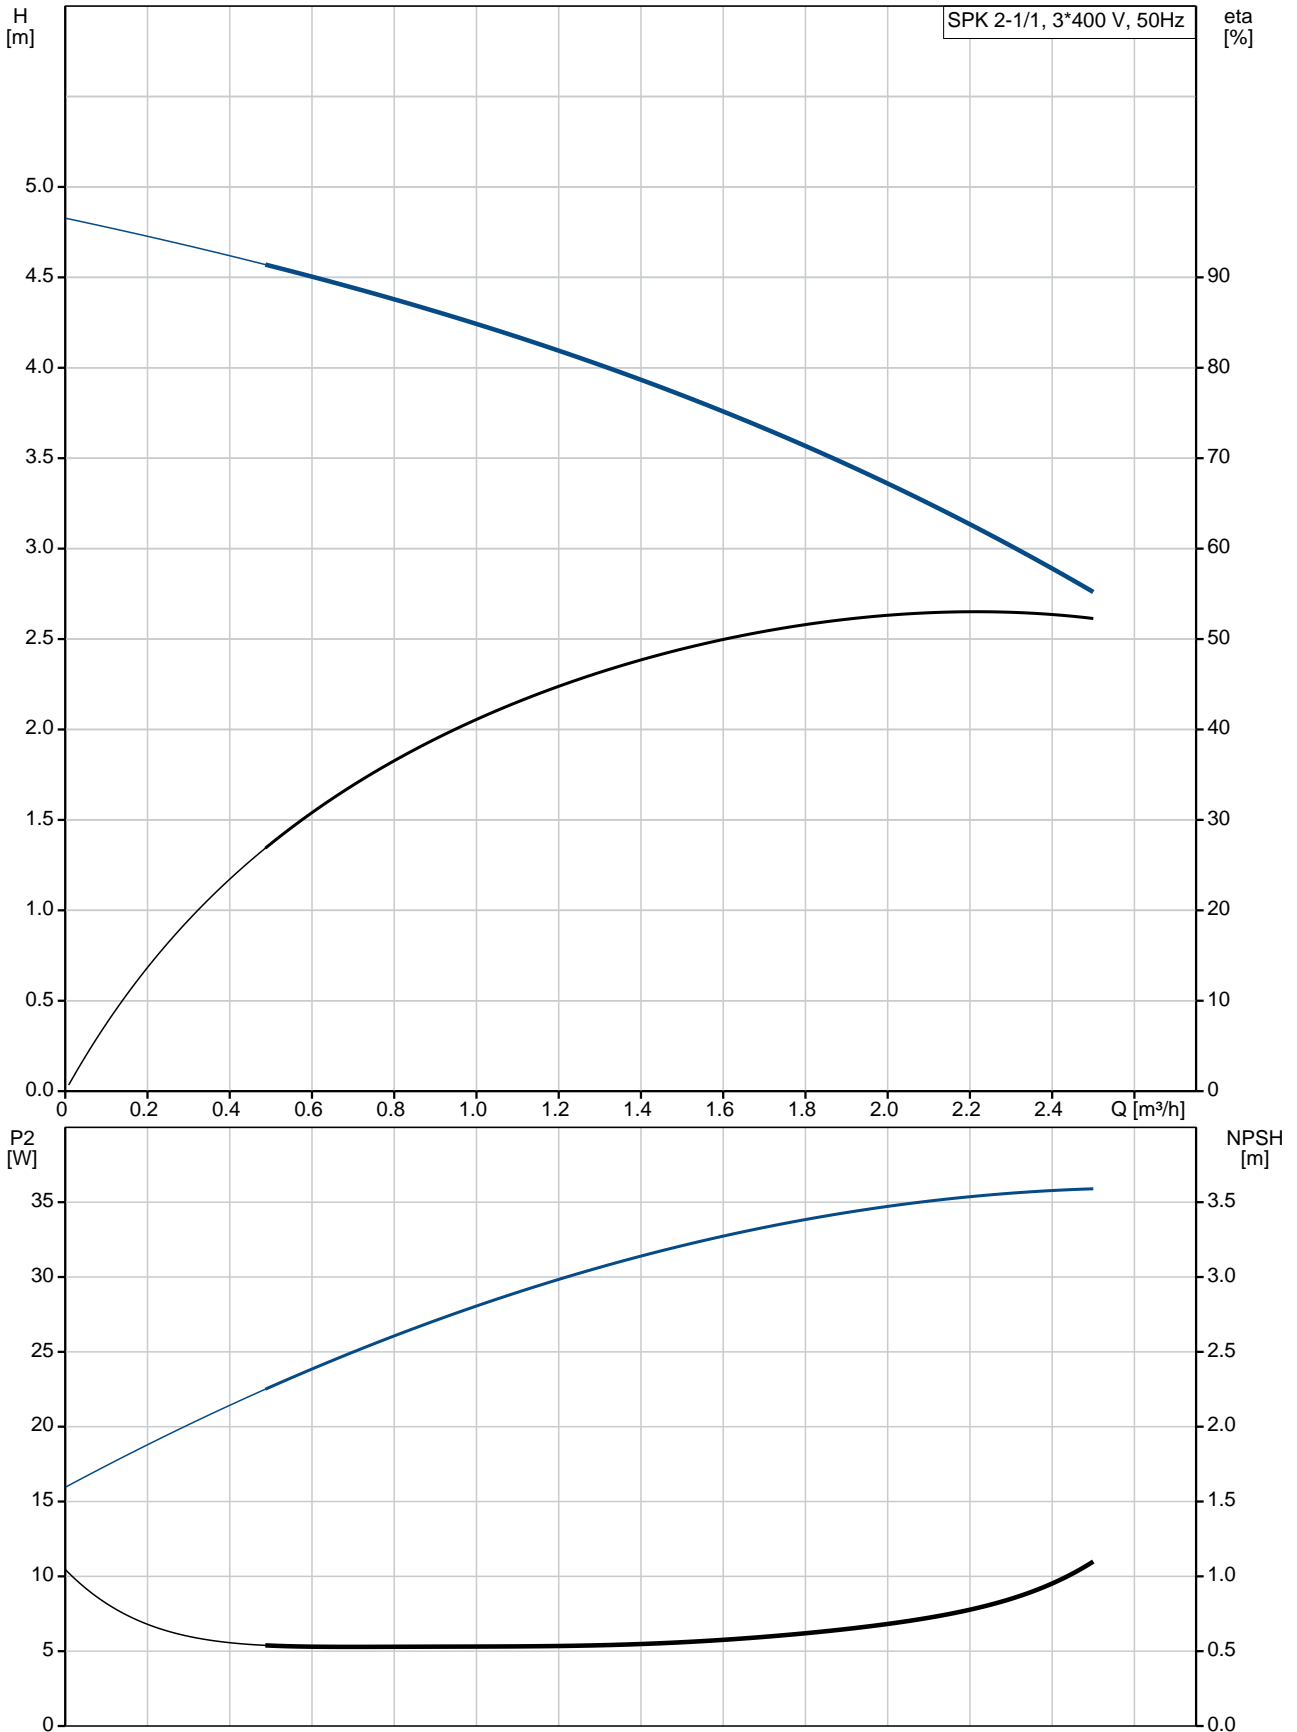

Description	Value
General information:	
Product name:	SPK 2-1/1 A-W-A-AUUV
Product No:	39DH5001
EAN number:	5700391750618
	5700391750618
Price:	451,00 GBP
Technical:	
Pump speed on which pump data are based:	2800 rpm
Rated flow:	2 m ³ /h
Rated head:	3.6 m
Stages:	1
Impellers:	1
Primary shaft seal:	AUUV
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	E
Drain holes:	Open drain hole
Materials:	
Pump head:	Cast iron
	EN-GJL-200
	ASTM 25B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	A
Installation:	
Maximum ambient temperature:	40 °C
Pipe connection:	G 3/4
Flange size for motor:	FT75
Connect code:	W
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 90 °C
Selected liquid temperature:	20 °C
Density at selected liquid temperature:	998.2 kg/m ³
Electrical data:	
Motor type:	SIEMENS
Rated power - P2:	0.06 kW
Power (P2) required by pump:	0.06 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415Y V
Rated current:	0.31/0.18 A
Cos phi - power factor:	0.79-0.72
Rated speed:	2800-2850 rpm
Number of poles:	2
Enclosure class (IEC 34-5):	55 (Protect. water jets/dust)
Insulation class (IEC 85):	F
Motor protec:	NONE
Motor No:	81602310
Others:	
Minimum efficiency index, MEI :	N/A
Net weight:	9.3 kg
Gross weight:	10.6 kg
Country of origin:	HU
Custom tariff no.:	84137075

