
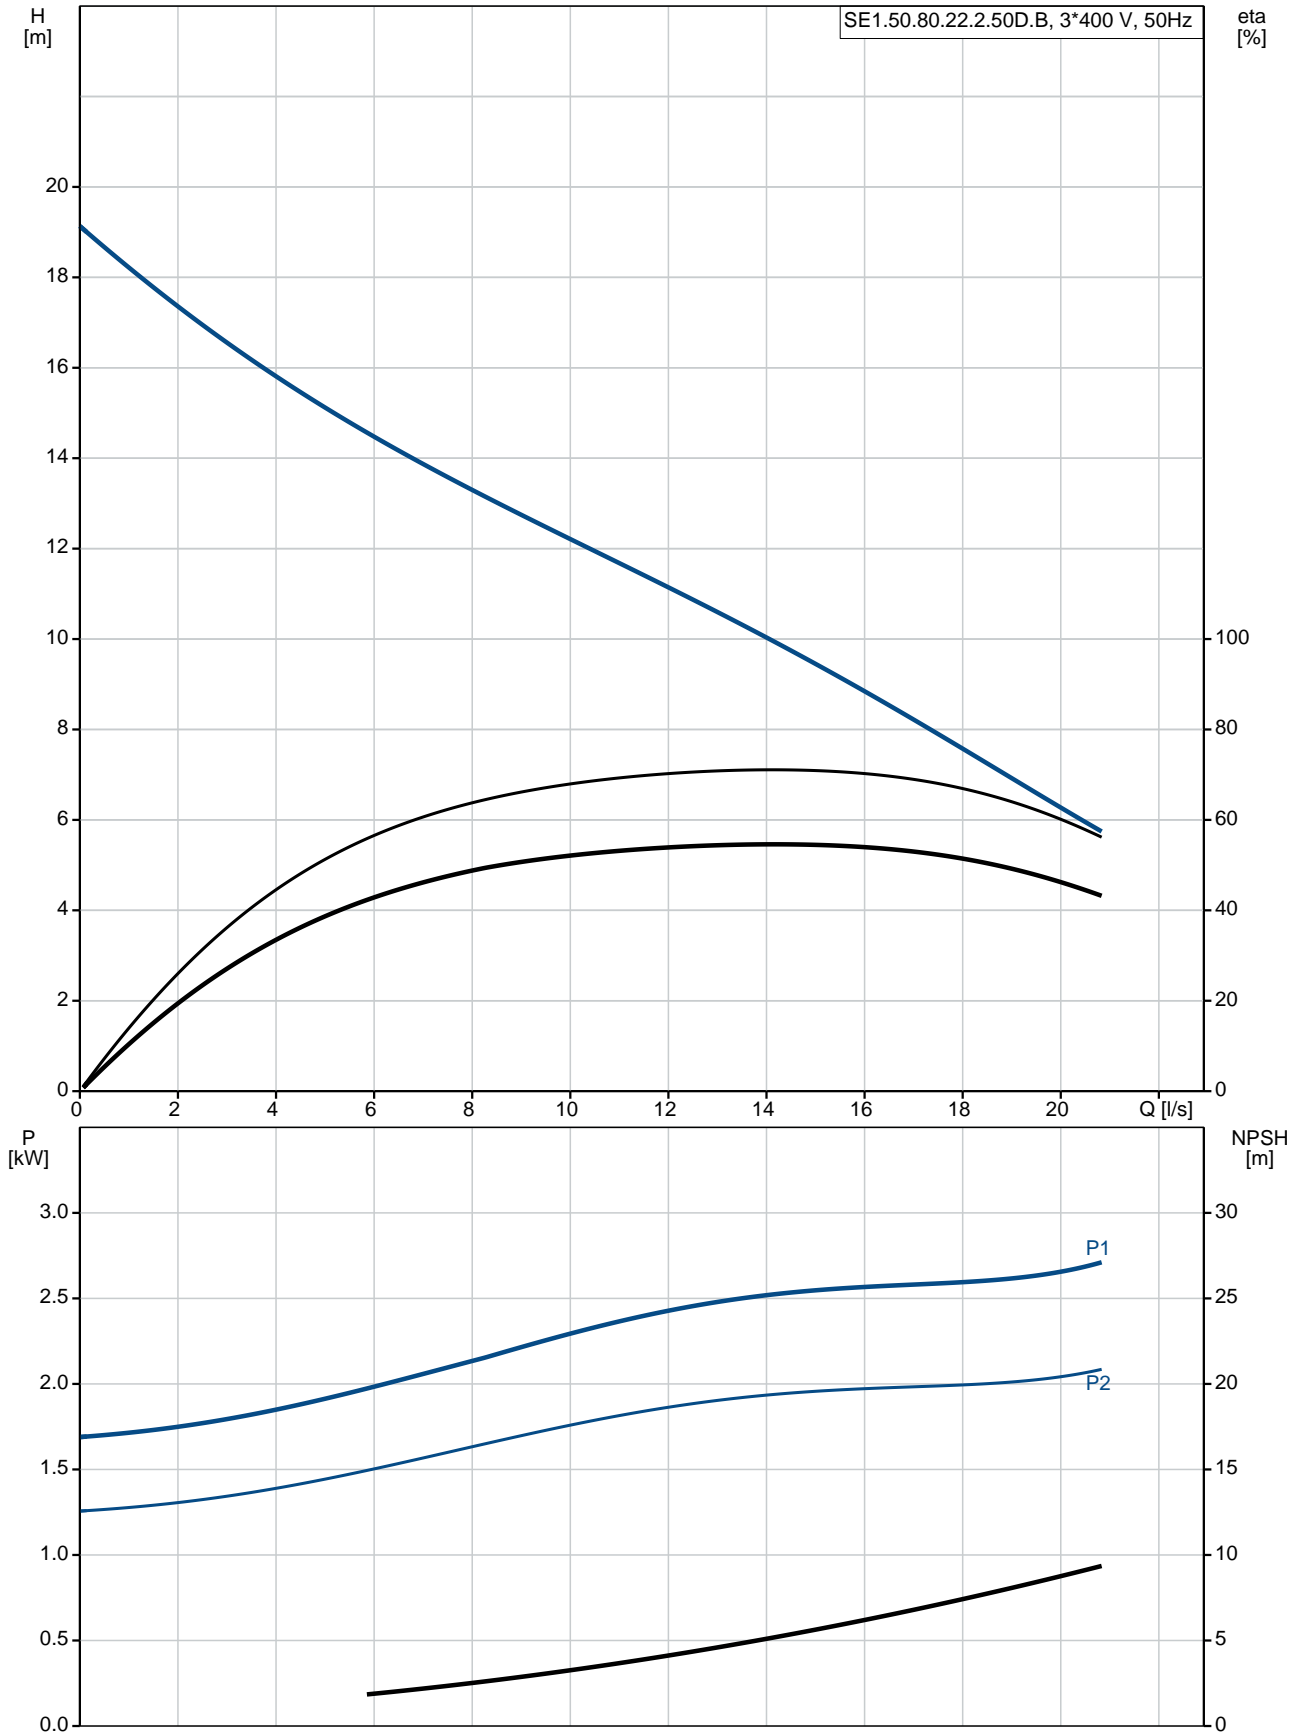







Qty.	Description																																																		
1	<p data-bbox="204 342 451 365"><b>SE1.50.80.22.2.50D.B</b></p> <div data-bbox="228 383 560 663">  </div> <p data-bbox="595 645 1075 667">Note! Product picture may differ from actual product</p> <p data-bbox="204 678 464 701">Product No.: <a href="#">96047981</a></p> <p data-bbox="204 734 1460 790">Non-self-priming, single-stage, centrifugal pump designed for handling wastewater, process water and unscreened raw sewage.</p> <p data-bbox="204 797 1460 898">The pump is designed for intermittent and continuous operation. The liquidless and maintenance free cooling system ensures that the pump can be used for submerged or dry installation. The revolutionary S-tube® impeller provides free spherical passage of solids up to 50 mm and is suitable for wastewater with a dry matter content of up to 3 %.</p> <p data-bbox="204 909 1460 965">A unique stainless-steel clamp assembling system enables quick and easy disassembly of the pump from the motor unit for service and inspection. No special tools are required. Pipework connection is via a DIN flange.</p> <p data-bbox="204 1025 316 1048"><b>Controls:</b></p> <table data-bbox="204 1055 855 1137"> <tr> <td>Moisture sensor:</td> <td>without moisture sensors</td> </tr> <tr> <td>Water-in-oil sensor:</td> <td>without water-in-oil sensor</td> </tr> <tr> <td>Temp. sensor:</td> <td>N</td> </tr> </table> <p data-bbox="204 1173 288 1196"><b>Liquid:</b></p> <table data-bbox="204 1202 699 1261"> <tr> <td>Liquid temperature range:</td> <td>0 .. 40 °C</td> </tr> <tr> <td>Density:</td> <td>998.2 kg/m<sup>3</sup></td> </tr> </table> <p data-bbox="204 1292 325 1314"><b>Technical:</b></p> <table data-bbox="204 1321 810 1525"> <tr> <td>Type of impeller:</td> <td>S-TUBE</td> </tr> <tr> <td>Maximum particle size:</td> <td>50 mm</td> </tr> <tr> <td>Primary shaft seal:</td> <td>SIC/SIC</td> </tr> <tr> <td>Secondary shaft seal:</td> <td>CARBON/CERAMICS</td> </tr> <tr> <td>Max. hydraulic efficiency:</td> <td>66 %</td> </tr> <tr> <td>Approvals on nameplate:</td> <td>EN12050-2</td> </tr> <tr> <td>Curve tolerance:</td> <td>ISO9906:2012 3B2</td> </tr> </table> <p data-bbox="204 1561 320 1583"><b>Materials:</b></p> <table data-bbox="204 1590 810 1648"> <tr> <td>Pump housing:</td> <td>EN 1561 EN-GJL-250</td> </tr> <tr> <td>Impeller:</td> <td>Cast iron</td> </tr> </table> <p data-bbox="204 1684 341 1706"><b>Installation:</b></p> <table data-bbox="204 1713 639 1854"> <tr> <td>Maximum operating pressure:</td> <td>6 bar</td> </tr> <tr> <td>Flange standard:</td> <td>DIN</td> </tr> <tr> <td>Pump outlet:</td> <td>DN 80</td> </tr> <tr> <td>Pressure rating:</td> <td>PN 10</td> </tr> <tr> <td>Maximum installation depth:</td> <td>20 m</td> </tr> </table> <p data-bbox="204 1890 379 1912"><b>Electrical data:</b></p> <table data-bbox="204 1919 719 2092"> <tr> <td>Power input - P1:</td> <td>2.8 kW</td> </tr> <tr> <td>Rated power - P2:</td> <td>2.2 kW</td> </tr> <tr> <td>Mains frequency:</td> <td>50 Hz</td> </tr> <tr> <td>Rated voltage:</td> <td>3 x 380-415 V</td> </tr> <tr> <td>Voltage tolerance:</td> <td>+6/-10 %</td> </tr> <tr> <td>Max starts per. hour:</td> <td>20</td> </tr> </table>	Moisture sensor:	without moisture sensors	Water-in-oil sensor:	without water-in-oil sensor	Temp. sensor:	N	Liquid temperature range:	0 .. 40 °C	Density:	998.2 kg/m <sup>3</sup>	Type of impeller:	S-TUBE	Maximum particle size:	50 mm	Primary shaft seal:	SIC/SIC	Secondary shaft seal:	CARBON/CERAMICS	Max. hydraulic efficiency:	66 %	Approvals on nameplate:	EN12050-2	Curve tolerance:	ISO9906:2012 3B2	Pump housing:	EN 1561 EN-GJL-250	Impeller:	Cast iron	Maximum operating pressure:	6 bar	Flange standard:	DIN	Pump outlet:	DN 80	Pressure rating:	PN 10	Maximum installation depth:	20 m	Power input - P1:	2.8 kW	Rated power - P2:	2.2 kW	Mains frequency:	50 Hz	Rated voltage:	3 x 380-415 V	Voltage tolerance:	+6/-10 %	Max starts per. hour:	20
Moisture sensor:	without moisture sensors																																																		
Water-in-oil sensor:	without water-in-oil sensor																																																		
Temp. sensor:	N																																																		
Liquid temperature range:	0 .. 40 °C																																																		
Density:	998.2 kg/m <sup>3</sup>																																																		
Type of impeller:	S-TUBE																																																		
Maximum particle size:	50 mm																																																		
Primary shaft seal:	SIC/SIC																																																		
Secondary shaft seal:	CARBON/CERAMICS																																																		
Max. hydraulic efficiency:	66 %																																																		
Approvals on nameplate:	EN12050-2																																																		
Curve tolerance:	ISO9906:2012 3B2																																																		
Pump housing:	EN 1561 EN-GJL-250																																																		
Impeller:	Cast iron																																																		
Maximum operating pressure:	6 bar																																																		
Flange standard:	DIN																																																		
Pump outlet:	DN 80																																																		
Pressure rating:	PN 10																																																		
Maximum installation depth:	20 m																																																		
Power input - P1:	2.8 kW																																																		
Rated power - P2:	2.2 kW																																																		
Mains frequency:	50 Hz																																																		
Rated voltage:	3 x 380-415 V																																																		
Voltage tolerance:	+6/-10 %																																																		
Max starts per. hour:	20																																																		

Qty.	Description																																																								
	<table> <tr> <td>Rated current:</td> <td>5.1-5.0 A</td> </tr> <tr> <td>Rated current at 3/4 load:</td> <td>3.8 A</td> </tr> <tr> <td>Rated current at 1/2 load:</td> <td>3 A</td> </tr> <tr> <td>Starting current:</td> <td>37 A</td> </tr> <tr> <td>Rated current at no load:</td> <td>2 A</td> </tr> <tr> <td>Cos phi - power factor:</td> <td>0.86</td> </tr> <tr> <td>Cos phi - p.f. at no load:</td> <td>0.21</td> </tr> <tr> <td>Cos phi - p.f. at 3/4 load:</td> <td>0.81</td> </tr> <tr> <td>Cos phi - p.f. at 1/2 load:</td> <td>0.72</td> </tr> <tr> <td>Rated speed:</td> <td>2895 rpm</td> </tr> <tr> <td>Locked-rotor torque:</td> <td>18 Nm</td> </tr> <tr> <td>Breakdown torque:</td> <td>23 Nm</td> </tr> <tr> <td>Moment of inertia:</td> <td>0.0095 kg m<sup>2</sup></td> </tr> <tr> <td>Motor efficiency at full load:</td> <td>77 %</td> </tr> <tr> <td>Motor efficiency at 3/4 load:</td> <td>76.6 %</td> </tr> <tr> <td>Motor efficiency at 1/2 load:</td> <td>73.5 %</td> </tr> <tr> <td>Number of poles:</td> <td>2</td> </tr> <tr> <td>Start. method:</td> <td>direct-on-line</td> </tr> <tr> <td>Enclosure class (IEC 34-5):</td> <td>IP68</td> </tr> <tr> <td>Insulation class (IEC 85):</td> <td>F</td> </tr> <tr> <td>Explosion proof:</td> <td>no</td> </tr> <tr> <td>Length of cable:</td> <td>10 m</td> </tr> <tr> <td>Cable type:</td> <td>LYNIFLEX</td> </tr> <tr> <td>Type of cable plug:</td> <td>NO PLUG</td> </tr> <tr> <td colspan="2"><b>Others:</b></td> </tr> <tr> <td>Net weight:</td> <td>87 kg</td> </tr> <tr> <td>Country of origin:</td> <td>HU</td> </tr> <tr> <td>Custom tariff no.:</td> <td>84137021</td> </tr> </table>	Rated current:	5.1-5.0 A	Rated current at 3/4 load:	3.8 A	Rated current at 1/2 load:	3 A	Starting current:	37 A	Rated current at no load:	2 A	Cos phi - power factor:	0.86	Cos phi - p.f. at no load:	0.21	Cos phi - p.f. at 3/4 load:	0.81	Cos phi - p.f. at 1/2 load:	0.72	Rated speed:	2895 rpm	Locked-rotor torque:	18 Nm	Breakdown torque:	23 Nm	Moment of inertia:	0.0095 kg m <sup>2</sup>	Motor efficiency at full load:	77 %	Motor efficiency at 3/4 load:	76.6 %	Motor efficiency at 1/2 load:	73.5 %	Number of poles:	2	Start. method:	direct-on-line	Enclosure class (IEC 34-5):	IP68	Insulation class (IEC 85):	F	Explosion proof:	no	Length of cable:	10 m	Cable type:	LYNIFLEX	Type of cable plug:	NO PLUG	<b>Others:</b>		Net weight:	87 kg	Country of origin:	HU	Custom tariff no.:	84137021
Rated current:	5.1-5.0 A																																																								
Rated current at 3/4 load:	3.8 A																																																								
Rated current at 1/2 load:	3 A																																																								
Starting current:	37 A																																																								
Rated current at no load:	2 A																																																								
Cos phi - power factor:	0.86																																																								
Cos phi - p.f. at no load:	0.21																																																								
Cos phi - p.f. at 3/4 load:	0.81																																																								
Cos phi - p.f. at 1/2 load:	0.72																																																								
Rated speed:	2895 rpm																																																								
Locked-rotor torque:	18 Nm																																																								
Breakdown torque:	23 Nm																																																								
Moment of inertia:	0.0095 kg m <sup>2</sup>																																																								
Motor efficiency at full load:	77 %																																																								
Motor efficiency at 3/4 load:	76.6 %																																																								
Motor efficiency at 1/2 load:	73.5 %																																																								
Number of poles:	2																																																								
Start. method:	direct-on-line																																																								
Enclosure class (IEC 34-5):	IP68																																																								
Insulation class (IEC 85):	F																																																								
Explosion proof:	no																																																								
Length of cable:	10 m																																																								
Cable type:	LYNIFLEX																																																								
Type of cable plug:	NO PLUG																																																								
<b>Others:</b>																																																									
Net weight:	87 kg																																																								
Country of origin:	HU																																																								
Custom tariff no.:	84137021																																																								

## 96047981 SE1.50.80.22.2.50D.B 50 Hz



Description	Value
<b>General information:</b>	
Product name:	SE1.50.80.22.2.50D.B
Product No:	96047981
EAN number:	5700395061369
	5700395061369
Price:	2.428,00 GBP
<b>Technical:</b>	
Max flow:	20.8 l/s
Head max:	18.1 m
Type of impeller:	S-TUBE
Maximum particle size:	50 mm
Primary shaft seal:	SIC/SIC
Secondary shaft seal:	CARBON/CERAMICS
Max. hydraulic efficiency:	66 %
Approvals on nameplate:	EN12050-2
Curve tolerance:	ISO9906:2012 3B2
Cooling jacket:	with cooling jacket
<b>Materials:</b>	
Pump housing:	EN 1561 EN-GJL-250
Impeller:	Cast iron
<b>Installation:</b>	
Maximum operating pressure:	6 bar
Flange standard:	DIN
Pump outlet:	DN 80
Pressure rating:	PN 10
Maximum installation depth:	20 m
Inst dry/wet:	DRY/SUBMERGED
Installation:	horizontal or vertical
<b>Liquid:</b>	
Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input - P1:	2.8 kW
Rated power - P2:	2.2 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-415 V
Voltage tolerance:	+6/-10 %
Max starts per. hour:	20
Rated current:	5.1-5.0 A
Rated current at 3/4 load:	3.8 A
Rated current at 1/2 load:	3 A
Starting current:	37 A
Rated current at no load:	2 A
Cos phi - power factor:	0.86
Cos phi - p.f. at no load:	0.21
Cos phi - p.f. at 3/4 load:	0.81
Cos phi - p.f. at 1/2 load:	0.72
Rated speed:	2895 rpm
Locked-rotor torque:	18 Nm
Breakdown torque:	23 Nm
Moment of inertia:	0.0095 kg m <sup>2</sup>
Motor efficiency at full load:	77 %
Motor efficiency at 3/4 load:	76.6 %
Motor efficiency at 1/2 load:	73.5 %
Number of poles:	2
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F

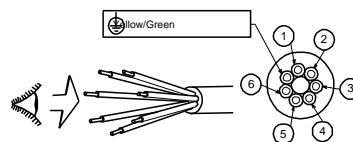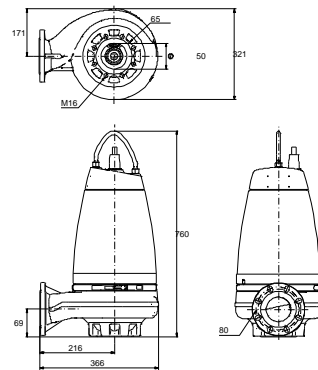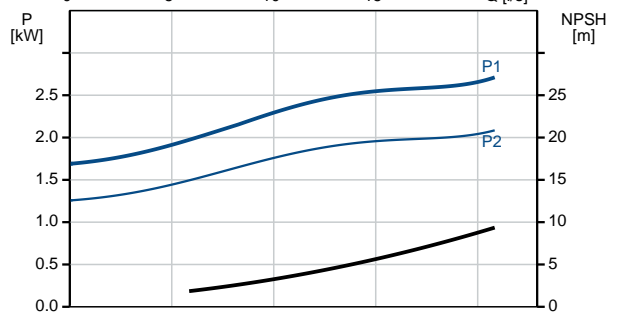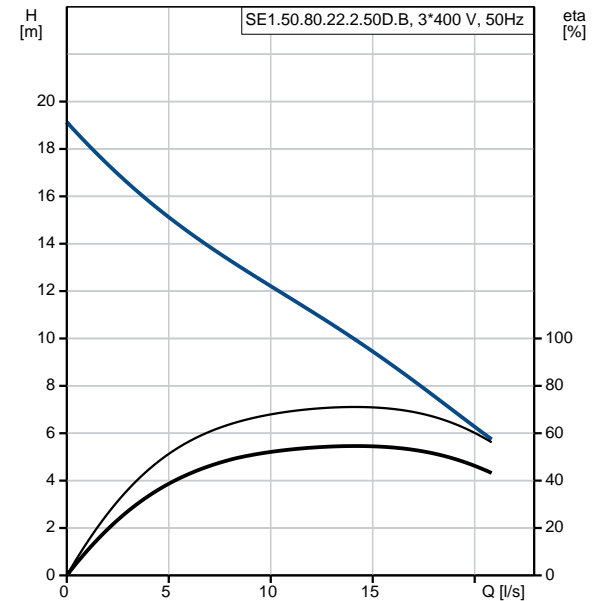



Company name:

Created by:




Phone:

Date:

21/01/2020


Description	Value
Explosion proof:	no
Motor protec:	THERMAL SWITCH
Thermal protec:	internal
Length of cable:	10 m
Cable type:	LYNIFLEX
Type of cable plug:	NO PLUG
<b>Controls:</b>	
Control box:	not included
Moisture sensor:	without moisture sensors
Water-in-oil sensor:	without water-in-oil sensor
Temp. sensor:	N
<b>Others:</b>	
Net weight:	87 kg
Country of origin:	HU
Custom tariff no.:	84137021

## 96047981 SE1.50.80.22.2.50D.B 50 Hz

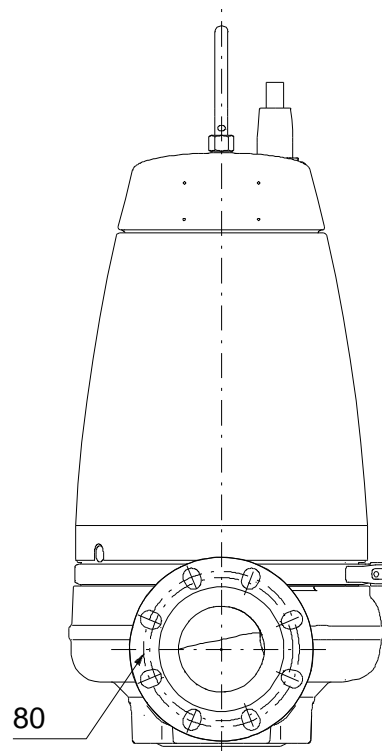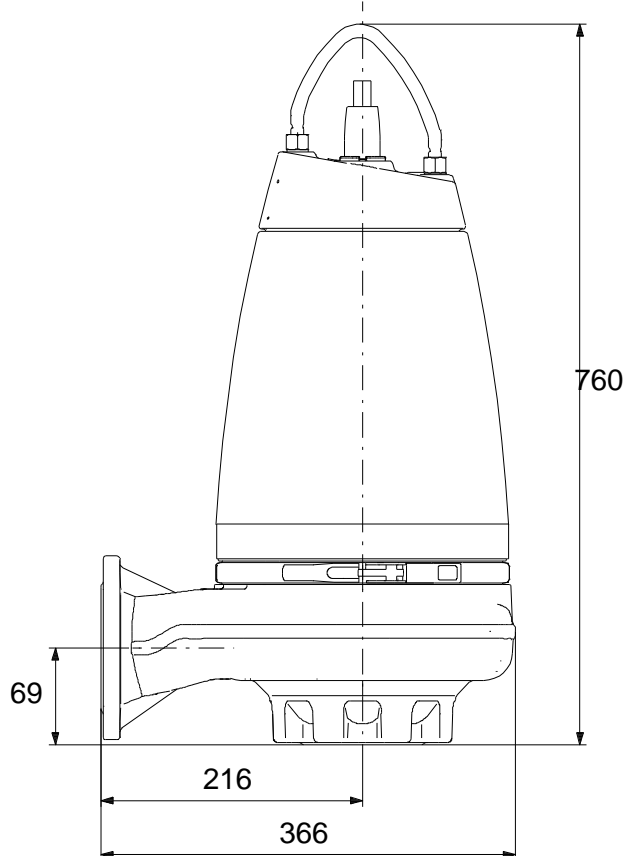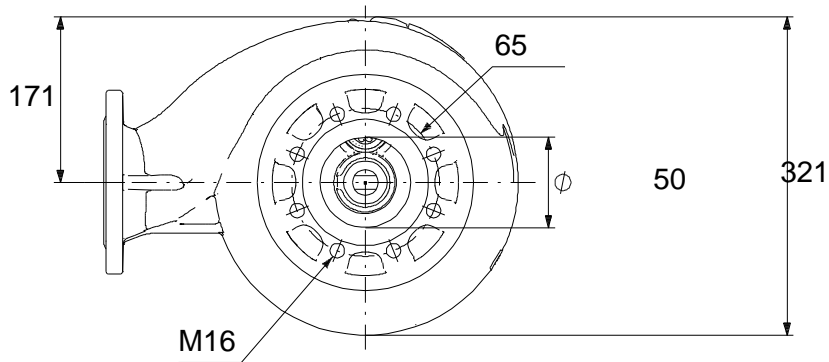


Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

## 96047981 SE1.50.80.22.2.50D.B 50 Hz

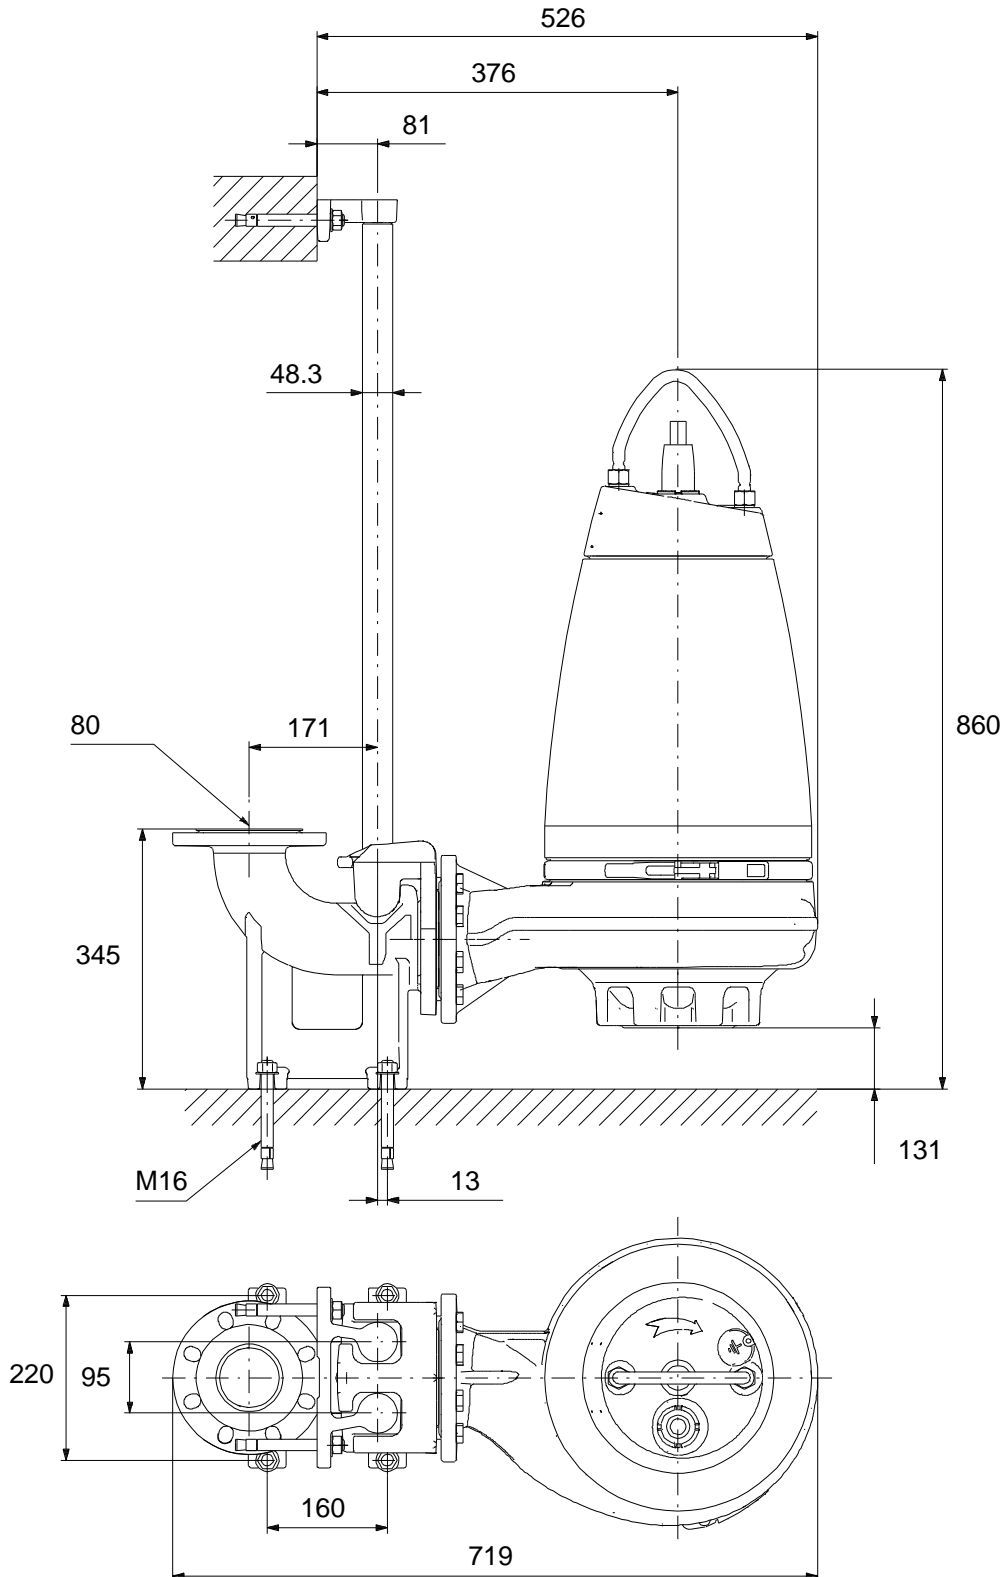

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.



## 96047981 SE1.50.80.22.2.50D.B 50 Hz

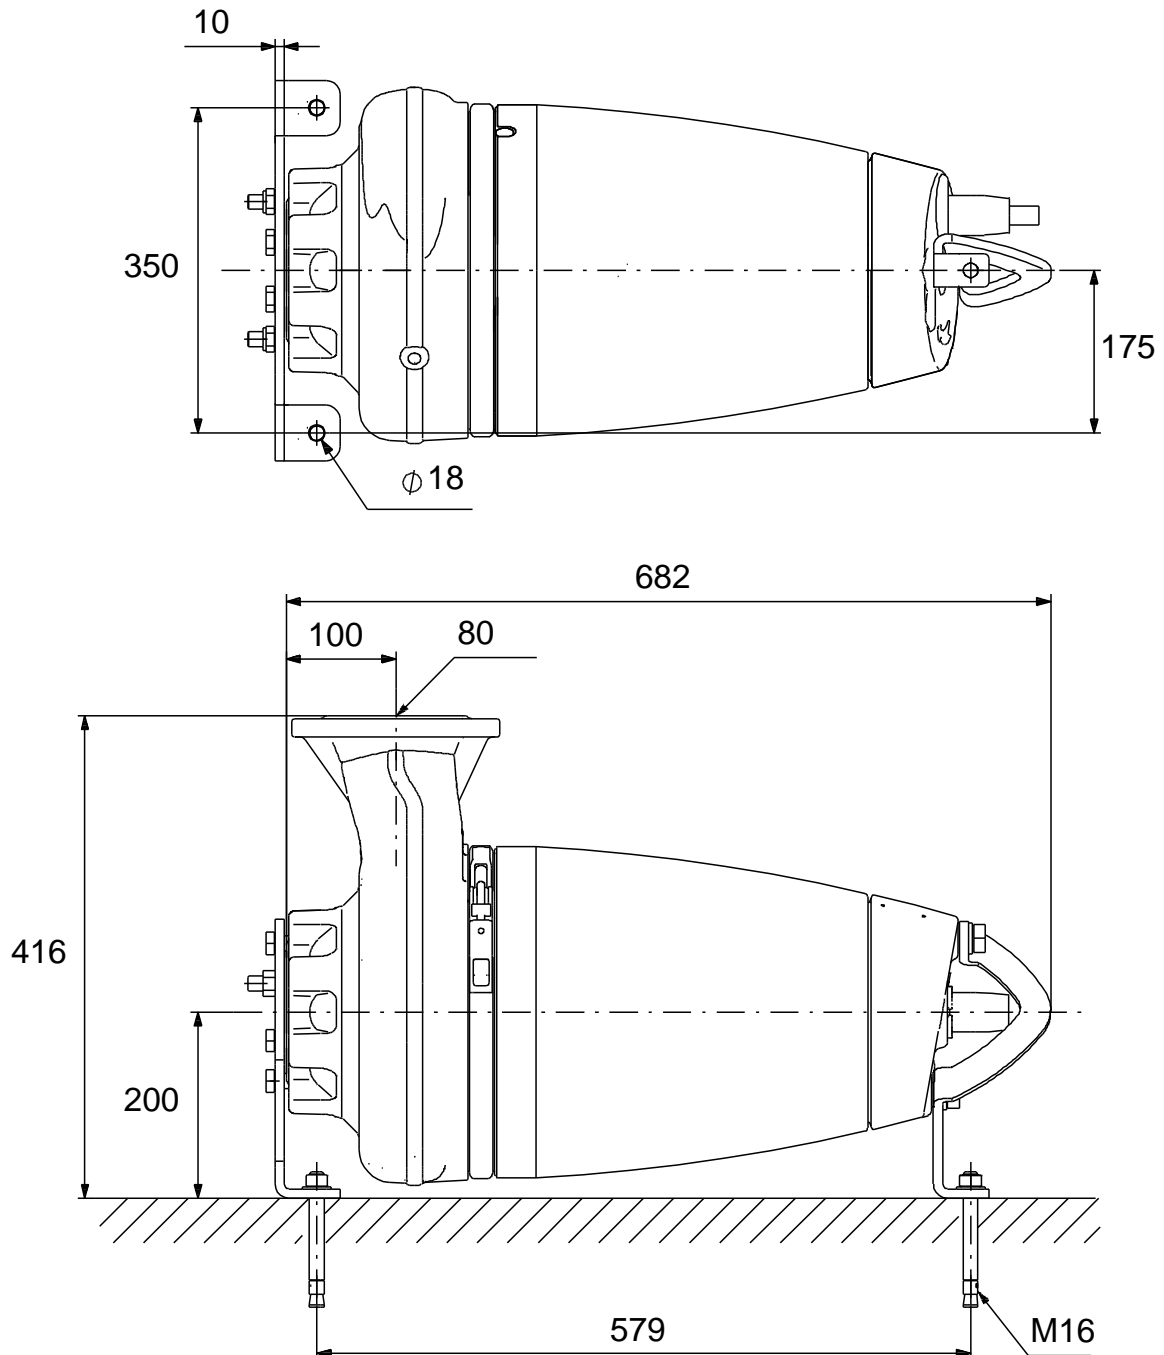

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.




## 96047981 SE1.50.80.22.2.50D.B 50 Hz

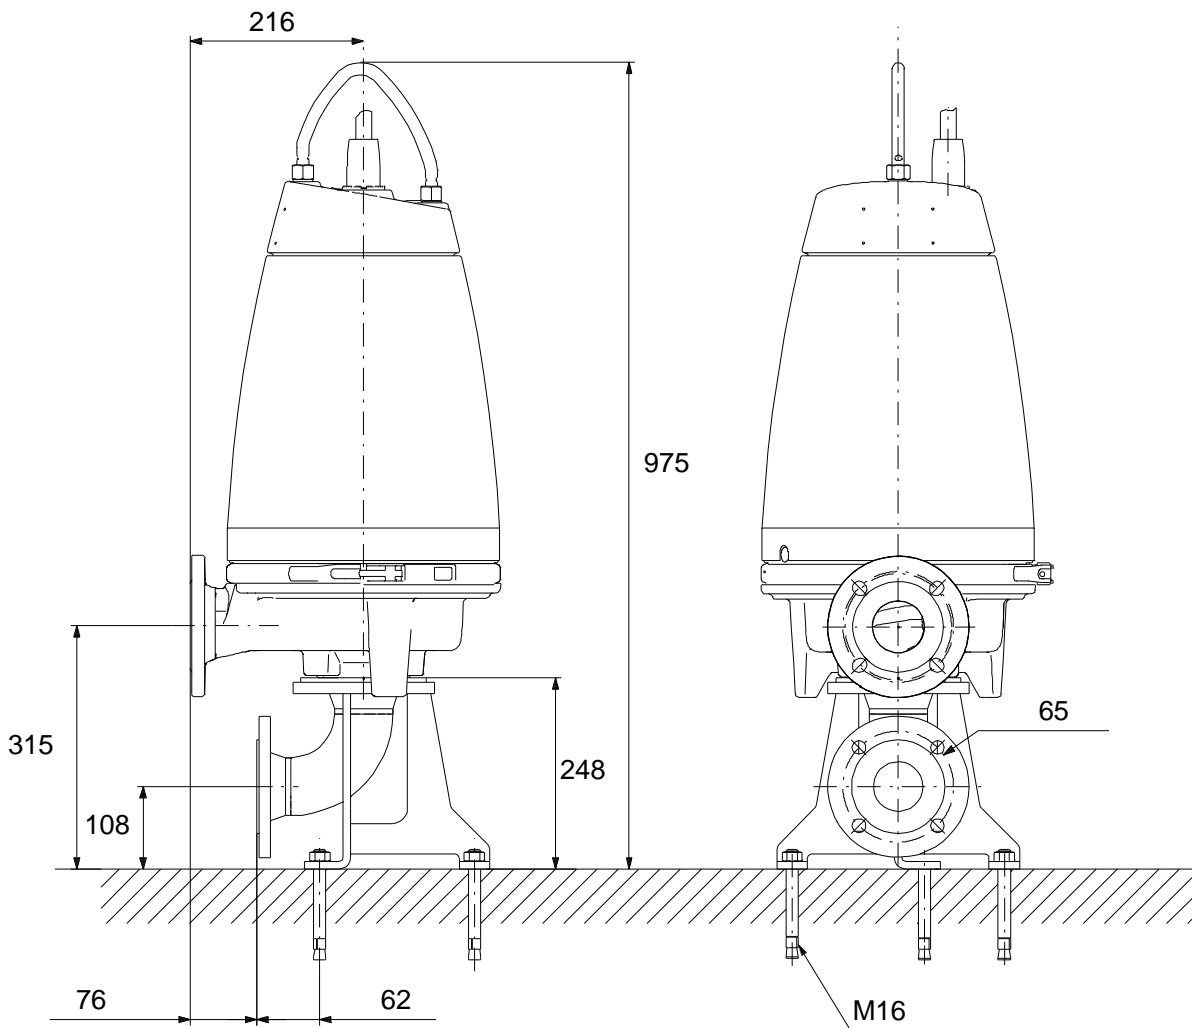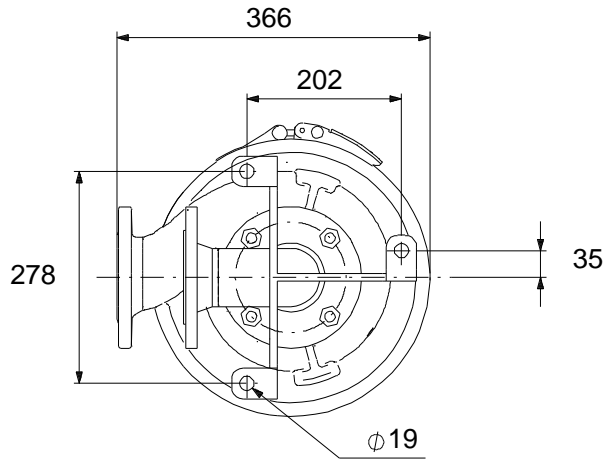

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

## 96047981 SE1.50.80.22.2.50D.B 50 Hz

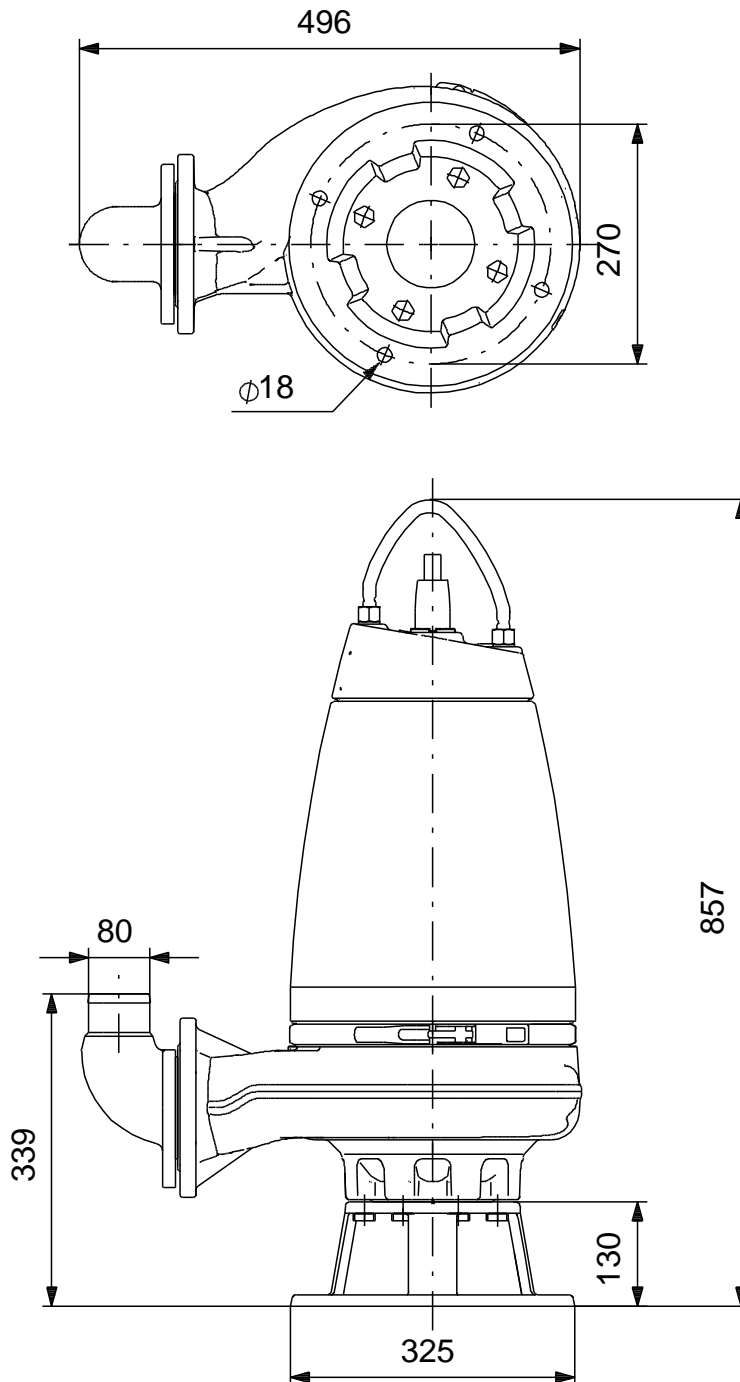

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.