
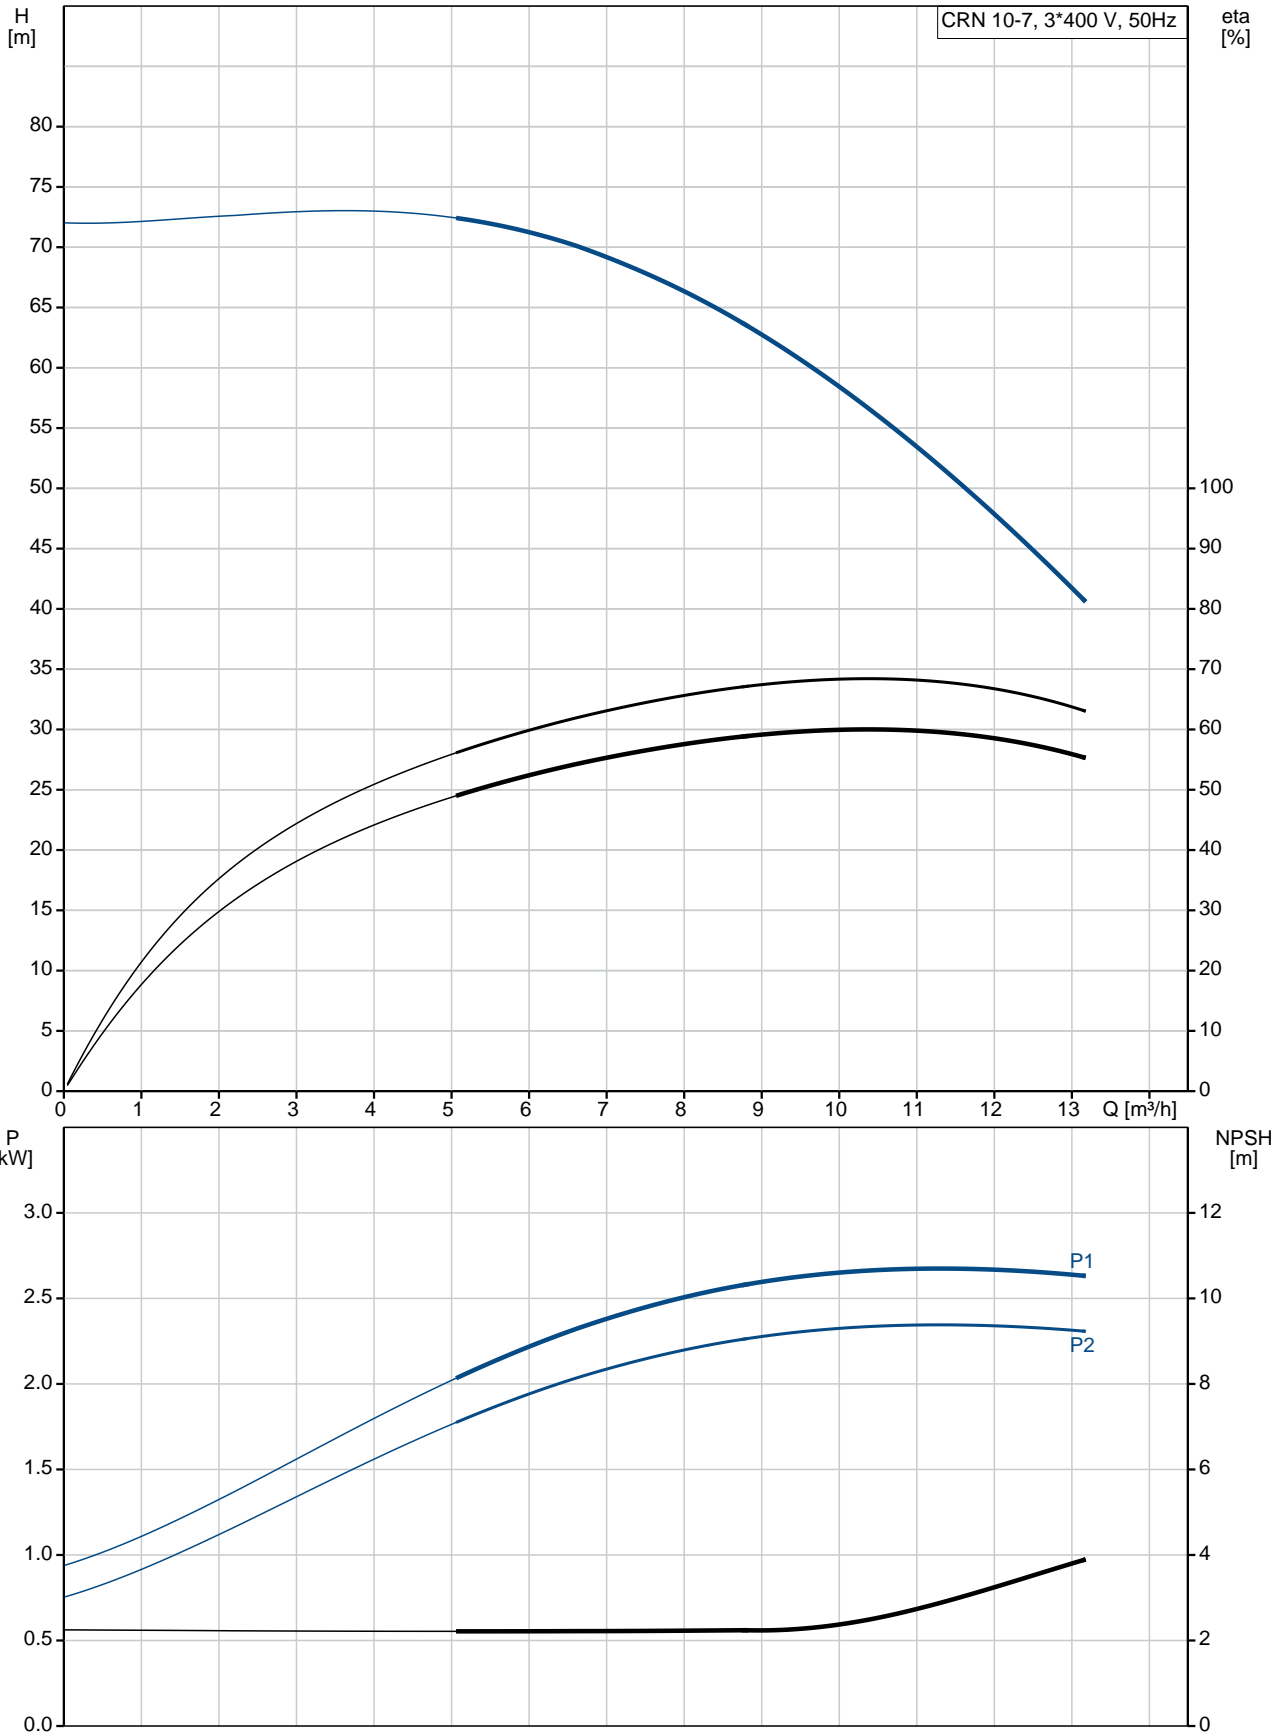





Qty.	Description
1	<p data-bbox="199 342 526 365">CRN 10-7 A-FGJ-H-E-HQQE</p>  <p data-bbox="199 663 467 685">Product No.: 96527747</p> <p data-bbox="199 723 1401 819">Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via combined DIN-ANSI-JIS flanges.</p> <p data-bbox="199 864 935 887">The pump is fitted with a 3-phase, fan-cooled asynchronous motor.</p> <p data-bbox="199 925 312 947">Controls:</p> <p data-bbox="199 954 636 976">Frequency converter: NONE</p> <p data-bbox="199 1014 288 1037">Liquid:</p> <p data-bbox="199 1043 632 1066">Pumped liquid: Water</p> <p data-bbox="199 1072 703 1095">Liquid temperature range: -20 .. 120 °C</p> <p data-bbox="199 1102 683 1124">Liquid temperature during operation: 20 °C</p> <p data-bbox="199 1131 699 1153">Density: 998.2 kg/m³</p> <p data-bbox="199 1191 325 1214">Technical:</p> <p data-bbox="199 1220 820 1243">Pump speed on which pump data are based: 2902 rpm</p> <p data-bbox="199 1249 651 1272">Rated flow: 10 m³/h</p> <p data-bbox="199 1279 643 1301">Rated head: 57.2 m</p> <p data-bbox="199 1308 651 1330">Pump orientation: Vertical</p> <p data-bbox="199 1337 636 1359">Shaft seal arrangement: Single</p> <p data-bbox="199 1366 639 1388">Code for shaft seal: HQQE</p> <p data-bbox="199 1395 724 1417">Approvals on nameplate: CE, EAC, ACS</p> <p data-bbox="199 1424 762 1447">Curve tolerance: ISO9906:2012 3B</p> <p data-bbox="199 1485 320 1507">Materials:</p> <p data-bbox="199 1514 727 1599">Base: Stainless steel EN 1.4408 AISI 316</p> <p data-bbox="199 1606 727 1691">Impeller: Stainless steel EN 1.4401 AISI 316</p> <p data-bbox="199 1697 608 1720">Bearing: SIC</p> <p data-bbox="199 1758 341 1780">Installation:</p> <p data-bbox="199 1787 632 1809">Maximum ambient temperature: 60 °C</p> <p data-bbox="199 1816 636 1839">Maximum operating pressure: 25 bar</p> <p data-bbox="199 1845 740 1899">Max pressure at stated temp: 25 bar / 120 °C 25 bar / -20 °C</p> <p data-bbox="199 1906 743 1928">Type of connection: DIN / ANSI / JIS</p> <p data-bbox="199 1935 639 1957">Size of inlet connection: DN 40 1 1/2 inch</p> <p data-bbox="199 1964 675 2018">Size of outlet connection: DN 40 1 1/2 inch</p> <p data-bbox="199 2024 683 2047">Pressure rating for pipe connection: PN 25</p> <p data-bbox="199 2054 636 2076">Flange rating inlet: 300 lb</p>

Qty.	Description
	<p>Flange size for motor: FT130</p> <p>Electrical data:</p> <p>Motor standard: IEC</p> <p>Motor type: 100LC</p> <p>IE Efficiency class: IE3</p> <p>Rated power - P2: 3 kW</p> <p>Power (P2) required by pump: 3 kW</p> <p>Mains frequency: 50 Hz</p> <p>Rated voltage: 3 x 220-240D/380-415Y V</p> <p>Rated current: 11.0/6.30 A</p> <p>Starting current: 840-920 %</p> <p>Cos phi - power factor: 0.87-0.82</p> <p>Rated speed: 2900-2920 rpm</p> <p>Efficiency: IE3 87,1%</p> <p>Motor efficiency at full load: 87.1 %</p> <p>Motor efficiency at 3/4 load: 88.0 %</p> <p>Motor efficiency at 1/2 load: 87.7 %</p> <p>Number of poles: 2</p> <p>Enclosure class (IEC 34-5): 55 Dust/Jetting</p> <p>Insulation class (IEC 85): F</p> <p>Others:</p> <p>Minimum efficiency index, MEI $\hat{\alpha}\%{\text{¥}}$: 0.70</p> <p>Net weight: 57 kg</p> <p>Gross weight: 60 kg</p> <p>Shipping volume: 0.13 m³</p> <p>Country of origin: GB</p> <p>Custom tariff no.: 84137075</p>

96527747 CRN 10-7 A-FGJ-H-E-HQQE 50 Hz



Description	Value
General information:	
Product name:	CRN 10-7 A-FGJ-H-E-HQQE
Product No:	96527747
EAN number:	5700397084861
Price:	2.102,00 GBP
Technical:	
Pump speed on which pump data are based:	2902 rpm
Rated flow:	10 m ³ /h
Rated head:	57.2 m
Head max:	71.7 m
Stages:	7
Impellers:	7
Number of reduced-diameter impellers:	0
Low NPSH:	N
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Code for shaft seal:	HQQE
Approvals on nameplate:	CE, EAC, ACS
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Base:	Stainless steel EN 1.4408 AISI 316
Impeller:	Stainless steel EN 1.4401 AISI 316
Material code:	H
Code for rubber:	E
Bearing:	SIC
Installation:	
Maximum ambient temperature:	60 °C
Maximum operating pressure:	25 bar
Max pressure at stated temp:	25 bar / 120 °C 25 bar / -20 °C
Type of connection:	DIN / ANSI / JIS
Size of inlet connection:	DN 40 1 1/2 inch
Size of outlet connection:	DN 40 1 1/2 inch
Pressure rating for pipe connection:	PN 25
Flange rating inlet:	300 lb
Flange size for motor:	FT130
Connect code:	FGJ
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 120 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor standard:	IEC
Motor type:	100LC
IE Efficiency class:	IE3
Rated power - P2:	3 kW
Power (P2) required by pump:	3 kW
Mains frequency:	50 Hz

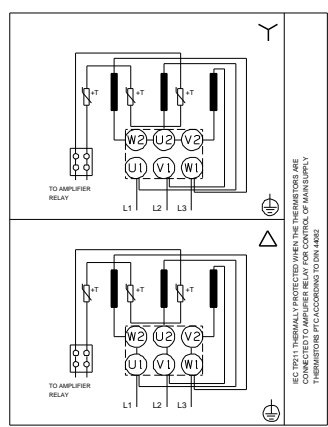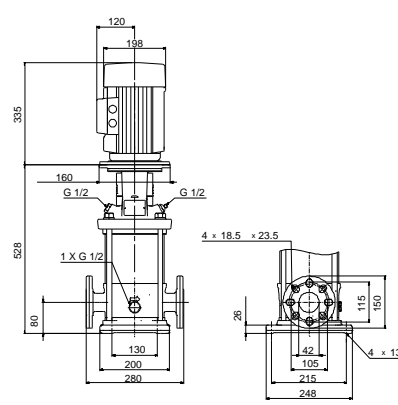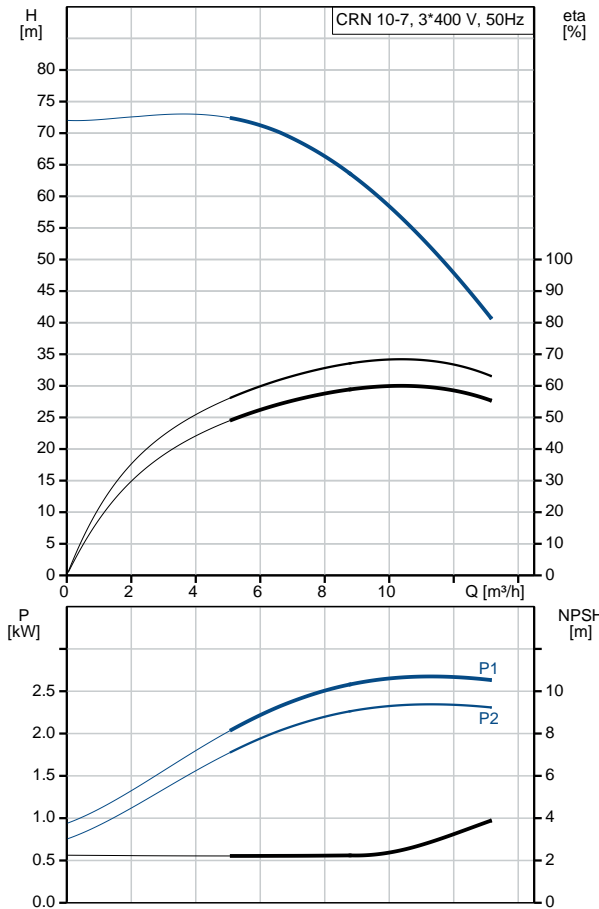



Company name:

Created by:

Phone:

Date:

12/03/2019

Description	Value
Rated voltage:	3 x 220-240D/380-415Y V
Rated current:	11.0/6.30 A
Starting current:	840-920 %
Cos phi - power factor:	0.87-0.82
Rated speed:	2900-2920 rpm
Efficiency:	IE3 87,1%
Motor efficiency at full load:	87.1 %
Motor efficiency at 3/4 load:	88.0 %
Motor efficiency at 1/2 load:	87.7 %
Number of poles:	2
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	85U05510
Controls:	
Frequency converter:	NONE
Others:	
Minimum efficiency index, MEI $\hat{a}\%_{\text{e}}\text{¥}$:	0.70
Net weight:	57 kg
Gross weight:	60 kg
Shipping volume:	0.13 m ³
Sales region:	Great Britain
Country of origin:	GB
Custom tariff no.:	84137075

96527747 CRN 10-7 A-FGJ-H-E-HQQE 50 Hz

