

Qty.	Description
------	-------------

1	CRN 150-6 A-F-H-E-HBQE
---	------------------------



Note! Product picture may differ from actual product

Product No.: [96771719](#)

Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via DIN flanges.

The pump is fitted with a 3-phase, fan-cooled asynchronous motor.

Controls:

Frequency converter: NONE

Liquid:

Pumped liquid: Water
 Liquid temperature range: 0 .. 120 °C
 Liquid temperature during operation: 20 °C
 Density: 998.2 kg/m³

Technical:

Pump speed on which pump data are based: 2975 rpm
 Rated flow: 150 m³/h
 Rated head: 133.8 m
 Pump orientation: Vertical
 Shaft seal arrangement: Single
 Code for shaft seal: HBQE
 Approvals on nameplate: CE, EAC, ACS
 Curve tolerance: ISO9906:2012 3B

Materials:

Base: Stainless steel
 EN 1.4408
 AISI 316
 Impeller: Stainless steel
 EN 1.4401
 AISI 316
 Bearing: SIC
 Support bearing: Graflon

Installation:

Maximum ambient temperature: 55 °C
 Maximum operating pressure: 30 bar

Qty. Description

Max pressure at stated temp: 30 bar / 120 °C
30 bar / 0 °C

Type of connection: DIN
Size of inlet connection: DN 125
Size of outlet connection: DN 125
Pressure rating for pipe connection: PN 40
Flange size for motor: FF500


Electrical data:

Motor standard: IEC
Motor type: SIEMENS
IE Efficiency class: IE3
Rated power - P2: 75 kW
Power (P2) required by pump: 75 kW
Mains frequency: 50 Hz
Rated voltage: 3 x 380-420D/660-725Y V
Rated current: 135-122/78,0-70,0 A
Starting current: 680-680 %
Cos phi - power factor: 0.89
Rated speed: 2975 rpm
Efficiency: IE3 94,7%
Motor efficiency at full load: 94.7-94.7 %
Motor efficiency at 3/4 load: 94.8-94.8 %
Motor efficiency at 1/2 load: 94.1-94.1 %
Number of poles: 2
Enclosure class (IEC 34-5): 55 Dust/Jetting
Insulation class (IEC 85): F




Others:

Minimum efficiency index, MEI $\hat{\alpha}\%$: 0.70
Net weight: 741 kg
Gross weight: 905 kg
Shipping volume: 2.25 m³

96771719 CRN 150-6 A-F-H-E-HBQE 50 Hz

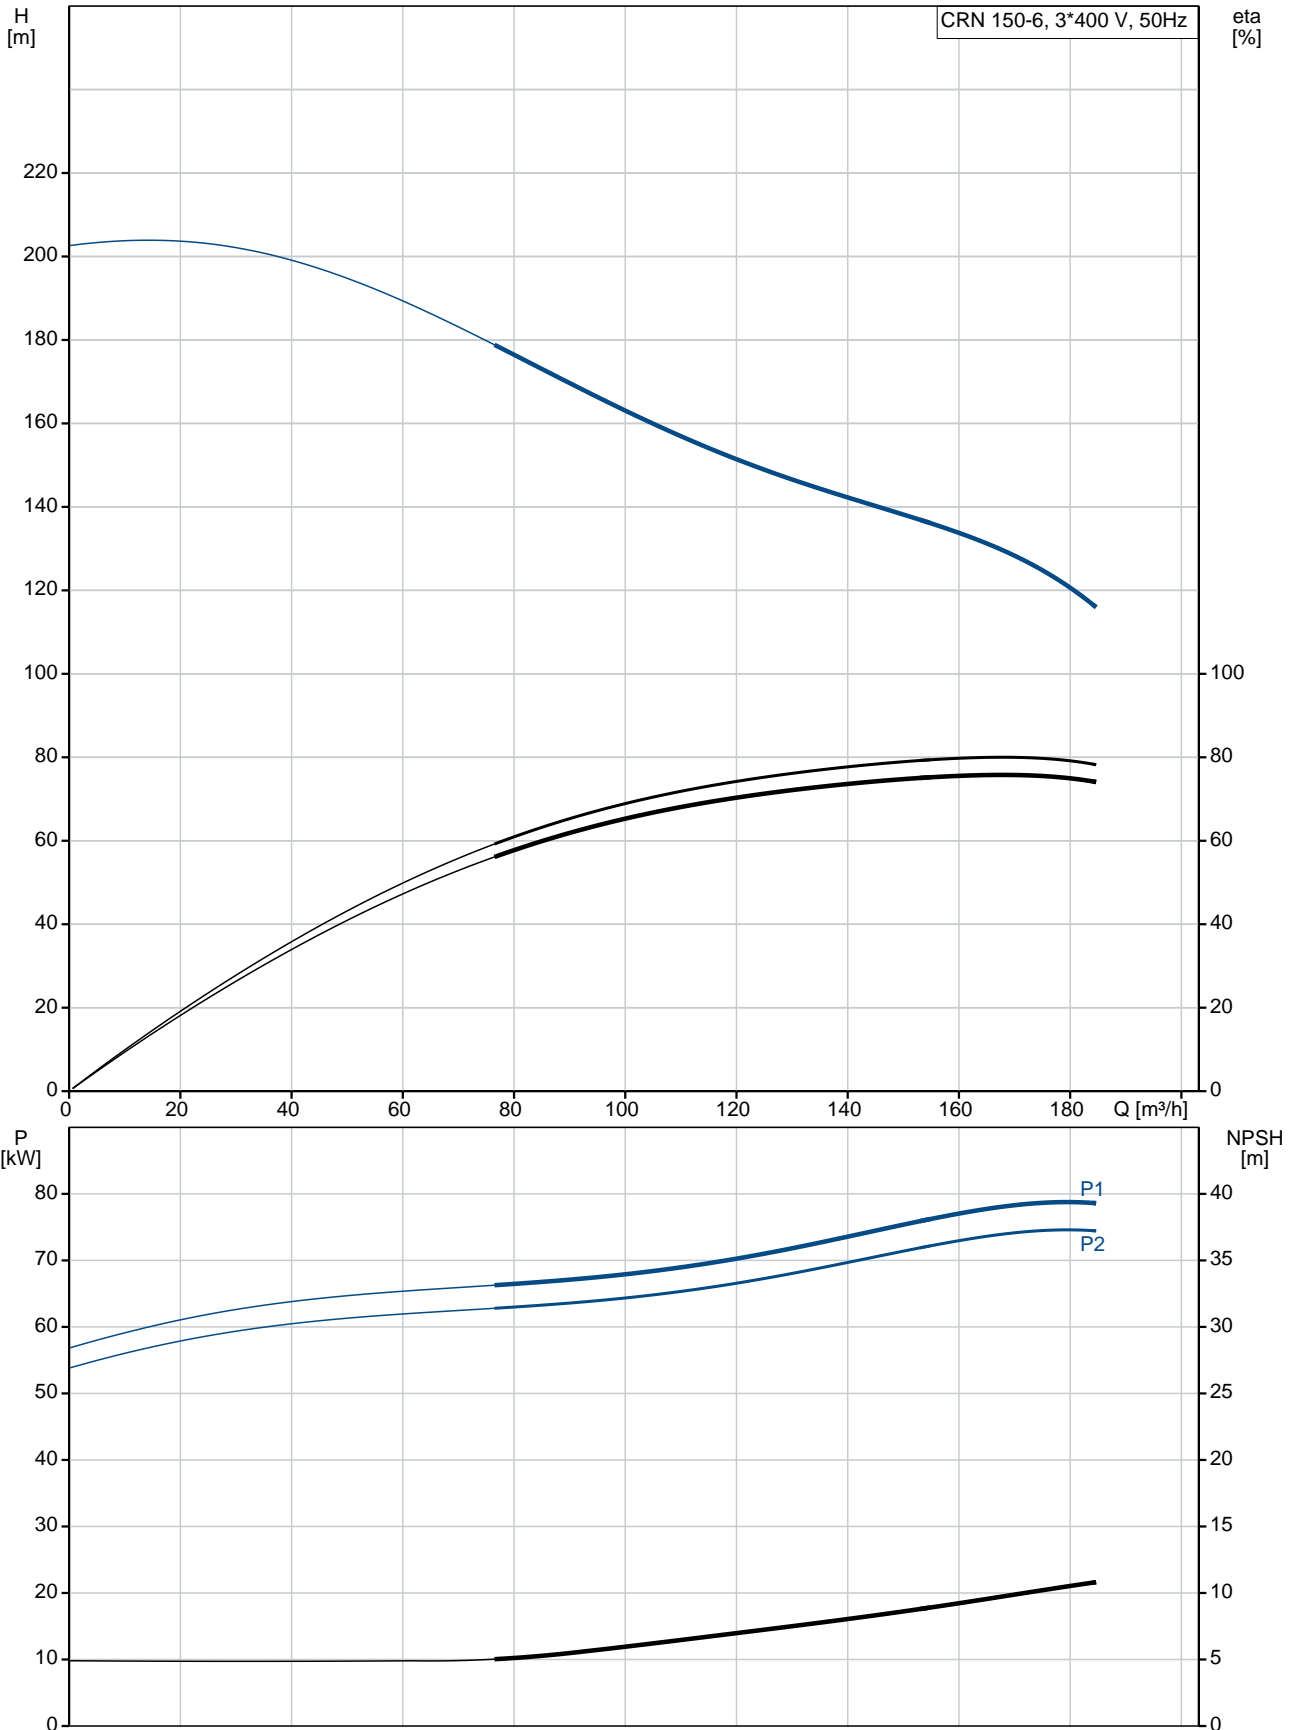

Description	Value
General information:	
Product name:	CRN 150-6 A-F-H-E-HBQE
Product No:	96771719
EAN number:	5700839100418
Technical:	
Pump speed on which pump data are based:	2975 rpm
Rated flow:	150 m ³ /h
Rated head:	133.8 m
Head max:	197.6 m
Stages:	6
Impellers:	6
Number of reduced-diameter impellers:	0
Low NPSH:	N
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Code for shaft seal:	HBQE
Approvals on nameplate:	CE, EAC, ACS
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Base:	Stainless steel EN 1.4408 AISI 316
Impeller:	Stainless steel EN 1.4401 AISI 316
Material code:	H
Code for rubber:	E
Bearing:	SIC
Support bearing:	Graffon
Installation:	
Maximum ambient temperature:	55 °C
Maximum operating pressure:	30 bar
Max pressure at stated temp:	30 bar / 0 °C
Type of connection:	DIN
Size of inlet connection:	DN 125
Size of outlet connection:	DN 125
Pressure rating for pipe connection:	PN 40
Flange size for motor:	FF500
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 120 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor standard:	IEC
Motor type:	SIEMENS
IE Efficiency class:	IE3
Rated power - P2:	75 kW
Power (P2) required by pump:	75 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-420D/660-725Y V
Rated current:	135-122/78,0-70,0 A

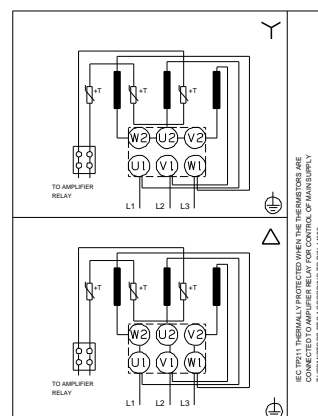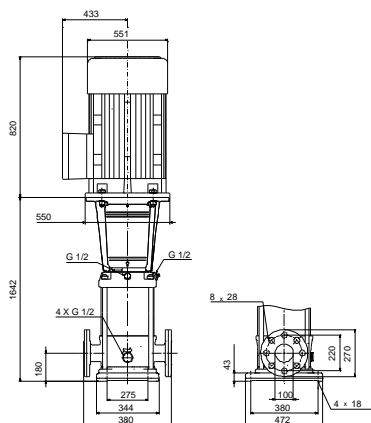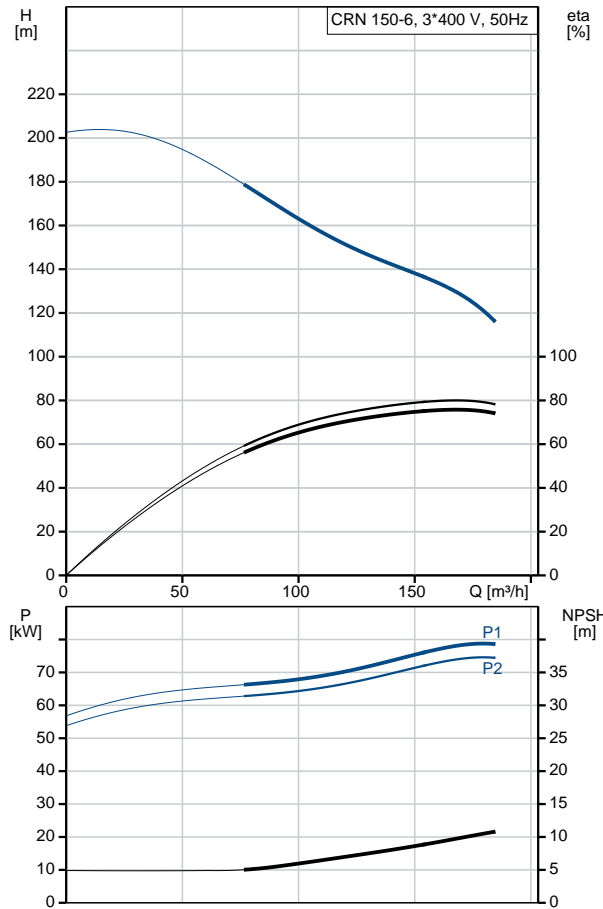



Company name:

Created by:

Phone:

Date:

12/03/2019

Description	Value
Starting current:	680-680 %
Cos phi - power factor:	0.89
Rated speed:	2975 rpm
Efficiency:	IE3 94,7%
Motor efficiency at full load:	94.7-94.7 %
Motor efficiency at 3/4 load:	94.8-94.8 %
Motor efficiency at 1/2 load:	94.1-94.1 %
Number of poles:	2
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	81U15340
Controls:	
Frequency converter:	NONE
Others:	
Minimum efficiency index, MEI %:	0.70
Net weight:	741 kg
Gross weight:	905 kg
Shipping volume:	2.25 m ³
Sales region:	Great Britain