
	GRUNDFOS 🕅	Company name: Created by: Phone:				
		Date:	02/01/2020			
Qty.	Description					
1	MAGNA3 50-100 F N					
	Note! Product picture may differ from actual product					
	Product No.: 97924357					
	The Grundfos MAGNA3 is a circulator pump with perm domestic hot water circulation applications perfectly, n old or new.	nanent magnet motor naking it the obvious o	that will fit both heating, cooling and choice for almost any building project –			
	With its unrivalled efficiency, all-encompassing range a replacing system components, the MAGNA3 is ideal for create high-performance systems for buildings.	and built-in communic or building owners, en	cation capabilities plus functionalities igineers and specifiers looking to			
	The MAGNA3 is a canned-rotor type, i.e. pump and m two gaskets for sealing. The bearings are lubricated by	otor form an integral y the pumped liquid.	unit without shaft seal and with only			
	The innovative clamp with only one screw enables eas	sy repositioning of the	pump head.			
	The innovative clamp with only one screw enables eas The MAGNA3 is a pump with no maintenance requires					



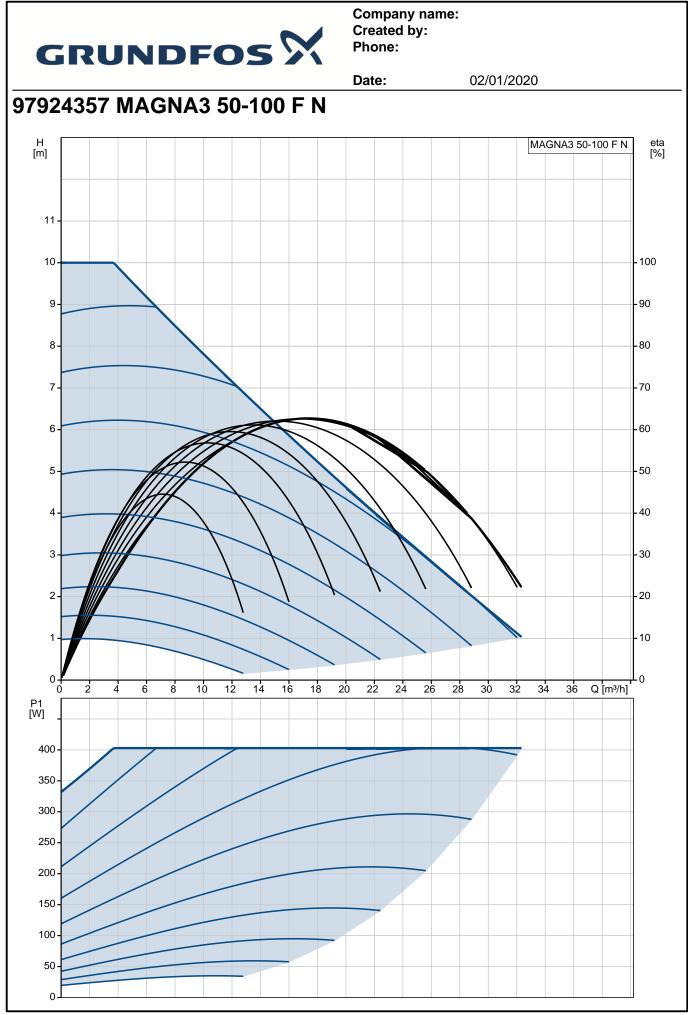

Company name: Created by: Phone:

GRONE	FOS X		
		Date:	02/01/2020
Description	Value	(m)	MAGNA3 50-100 F N
General information:			
Product name:	MAGNA3 50-100 F N	11 -	
Product No:	97924357	10	
EAN number:	5710626494330	10	- 100
	5710626494330	9-	- 90
Price:	3.432,00 GBP		
Technical:	0.102,00 001	8-	- 80
Rated flow:	16.9 m³/h	7-	-70
Rated head:	5.8 m		
		6-	-60
Head max:	100 dm	5-	50
TF class:	110		
Approvals on nameplate:	CE,VDE,EAC,CN ROHS,WEEE	4-	40
Model:	D	3-	
Materials:		2	
Pump housing:	Stainless steel		
	EN 1.4308	1	-10
	ASTM 351 CF8		
Impollory		0 5	10 15 20 25 30 Q [m³/h]
Impeller:	PES 30%GF	P1 [W] -	
Installation:			
Range of ambient temperature:	0 40 °C	400 -	
Maximum operating pressure:	10 bar	350 -	
Flange standard:	DIN	300 -	
Pipe connection:	DN 50	250 -	
Pressure rating:	PN6/10	200-	
Port-to-port length:	280 mm	150 -	
Liquid:	200 1111	100 -	
Pumped liquid:	Water	50 -	
Liquid temperature range:	-10 110 °C	0 -	
Selected liquid temperature:	0° C		
Density at selected liquid temperature:	983.2 kg/m³	164	376 72 304
Electrical data:			
Power input - P1:	21 403 W		
Mains frequency:	50 / 60 Hz		
Rated voltage:	1 x 230 V		
Maximum current consumption:	0.22 1.86 A		
		73	97 ¥ 110/125 110/125
Enclosure class (IEC 34-5):	X4D	127 127	. –
Insulation class (IEC 85):	F		
Others:			
Energy (EEI):	0.18		
Net weight:	18.9 kg		
Gross weight:	21.1 kg		
Shipping volume:	0.046 m ³		
Danish VVS No.:	380983510		
Swedish RSK No.:	5803225	Example of mains-connected n with mains switch, backup fuse	notor
		with mains switch, backup tuse	
Country of origin:	DE		
Custom tariff no .:	84137030	RCD/RCCB	
		\$	
			Ref. Ref. American Marco
			- Mar. I Zasek Angelo
			ά ε 🔶 z