

Company name: Created by: Phone:

Date: 02/01/2020

Qty. | Description

1 MAGNA3 50-180 F N



Note! Product picture may differ from actual product

Product No.: 97924360

The Grundfos MAGNA3 is a circulator pump with permanent magnet motor that will fit both heating, cooling and domestic hot water circulation applications perfectly, making it the obvious choice for almost any building project – old or new.

With its unrivalled efficiency, all-encompassing range and built-in communication capabilities plus functionalities replacing system components, the MAGNA3 is ideal for building owners, engineers and specifiers looking to create high-performance systems for buildings.

The MAGNA3 is a canned-rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid.

The innovative clamp with only one screw enables easy repositioning of the pump head.


The MAGNA3 is a pump with no maintenance requirements and with extremely low Life Cycle Cost.



Company name: Created by: Phone:

Date: 02/01/2020

97924360 MAGNA3 50-180 F N

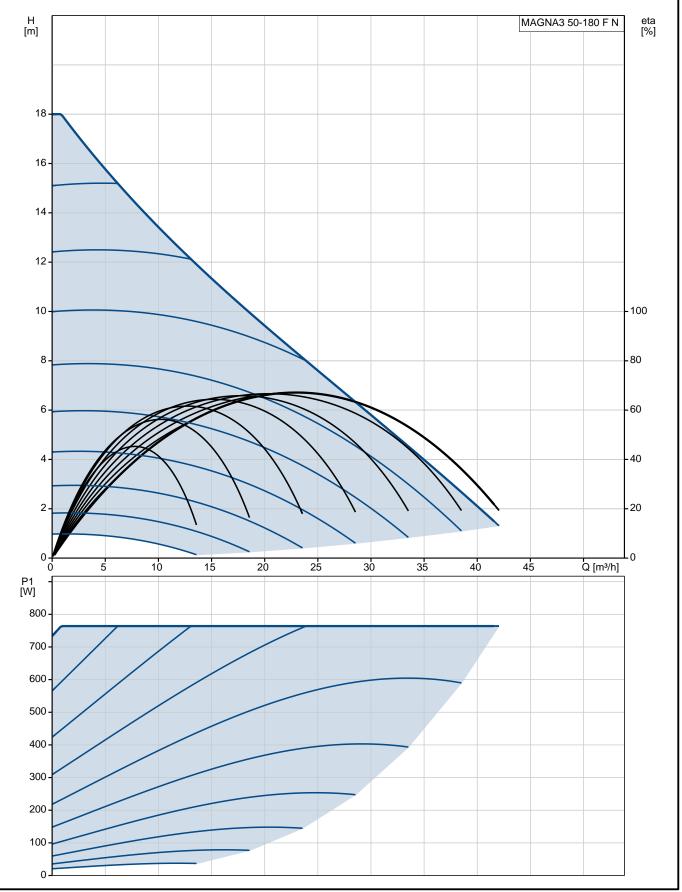



Company name: Created by: Phone:

Date: 02/01/2020

IAGNA3 50-180 F N 7924360 710626494361 710626494361 .894,00 GBP 0.1 m³/h .2 m 80 dm 10 E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8 ES 30%GF
7924360 710626494361 710626494361 .894,00 GBP 0.1 m³/h .2 m 80 dm 10 .E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8
710626494361 710626494361 .894,00 GBP 0.1 m³/h .2 m 80 dm 10 .E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8
710626494361 .894,00 GBP 0.1 m³/h .2 m 80 dm 10 E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8
.894,00 GBP 0.1 m³/h .2 m 80 dm 10 E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8
0.1 m³/h .2 m 80 dm 10 E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8
.2 m 80 dm 10 E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8
.2 m 80 dm 10 E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8
80 dm 10 E,VDE,EAC,CN OHS,WEEE tainless steel N 1.4308 STM 351 CF8
tainless steel N 1.4308 STM 351 CF8
tainless steel N 1.4308 STM 351 CF8
OHS,WEEE tainless steel N 1.4308 STM 351 CF8
tainless steel N 1.4308 STM 351 CF8
N 1.4308 STM 351 CF8
N 1.4308 STM 351 CF8
STM 351 CF8
ES 30%GF
40 °C
0 bar
IN
N 50
N6/10
80 mm
/ater
I0 110 °C
0 °C
83.2 kg/m³
3 764 W
0 / 60 Hz
x 230 V
.24 3.45 A
4D
.18
9.8 kg
2 kg
.046 m³
80983518
803227
E
4137030

