
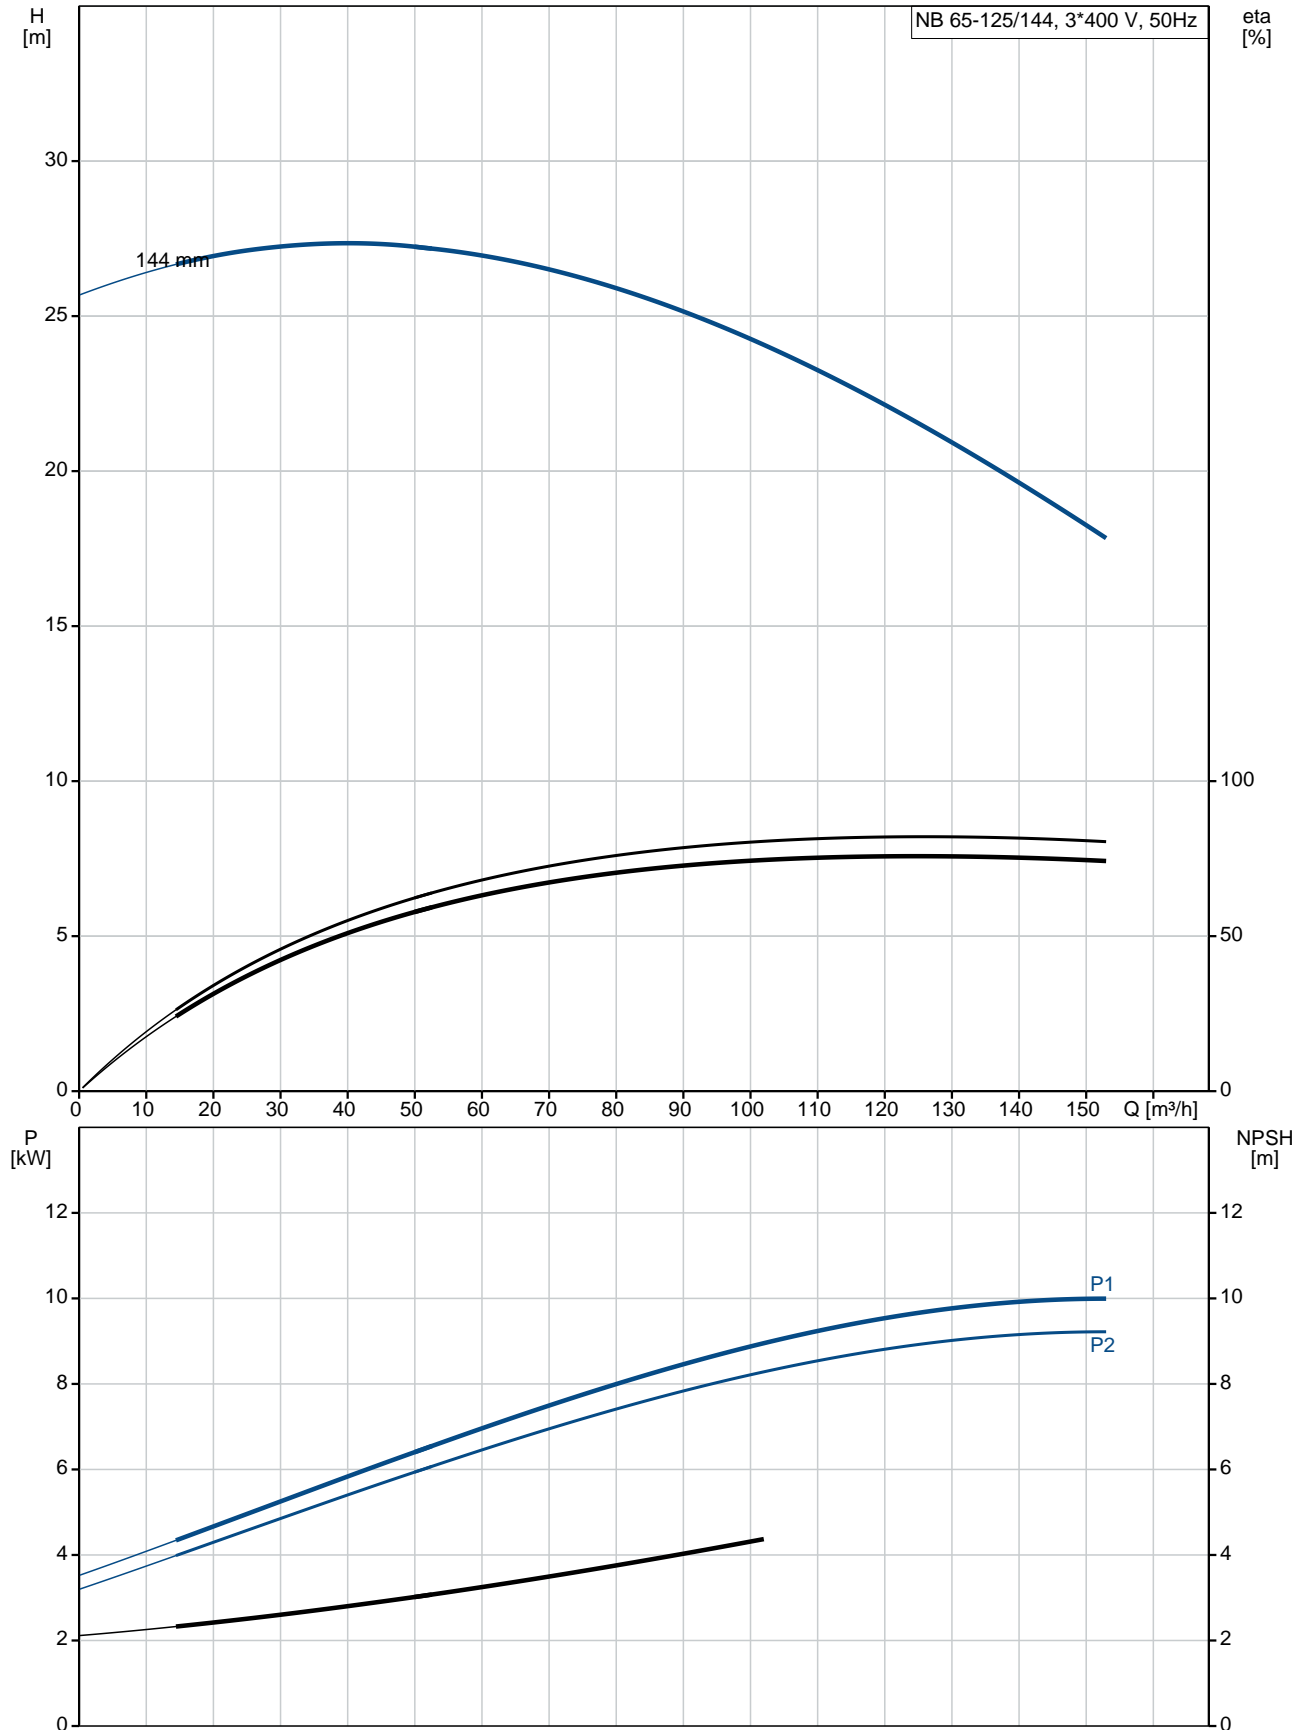


Qty.	Description
1	<p data-bbox="199 340 534 362"><b>NB 65-125/144 ASF2ABQQE</b></p> <div data-bbox="215 403 566 638">  </div> <p data-bbox="590 631 1077 654" style="text-align: center;"><b>Note! Product picture may differ from actual product</b></p> <p data-bbox="199 663 470 685">Product No.: <a href="#">98139415</a></p> <p data-bbox="199 719 1460 775">Non-self-priming, single-stage, centrifugal volute pump designed according to ISO 5199 with dimensions and rated performance according to EN 733 (10 bar).</p> <p data-bbox="199 808 1460 887">Flanges are PN 16 with dimensions according to EN 1092-2. The pump has an axial suction port, radial discharge port, horizontal shaft and a back pull-out design enabling removal of the motor, motor stool, cover and impeller without disturbing the pump housing or pipework.</p> <p data-bbox="199 898 941 920">The unbalanced rubber bellows seal is according to DIN EN 12756.</p> <p data-bbox="199 925 909 947">The pump is close-coupled to a fan-cooled asynchronous motor.</p> <p data-bbox="199 981 311 1003"><b>Controls:</b></p> <p data-bbox="199 1014 638 1037">Frequency converter: NONE</p> <p data-bbox="199 1070 287 1093"><b>Liquid:</b></p> <p data-bbox="199 1104 638 1126">Pumped liquid: Water</p> <p data-bbox="199 1137 710 1160">Liquid temperature range: -25 .. 120 °C</p> <p data-bbox="199 1171 686 1193">Liquid temperature during operation: 20 °C</p> <p data-bbox="199 1205 702 1227">Density: 998.2 kg/m<sup>3</sup></p> <p data-bbox="199 1261 327 1283"><b>Technical:</b></p> <p data-bbox="199 1294 662 1317">Rated flow: 127 m<sup>3</sup>/h</p> <p data-bbox="199 1328 654 1350">Rated head: 20.97 m</p> <p data-bbox="199 1361 654 1384">Actual impeller diameter: 144 mm</p> <p data-bbox="199 1395 654 1417">Nominal impeller diameter: 125 mm</p> <p data-bbox="199 1429 638 1451">Shaft seal arrangement: Single</p> <p data-bbox="199 1462 638 1485">Code for shaft seal: BQQE</p> <p data-bbox="199 1496 766 1518">Curve tolerance: ISO9906:2012 3B</p> <p data-bbox="199 1552 319 1574"><b>Materials:</b></p> <p data-bbox="199 1585 734 1641">Pump housing: Cast iron EN-GJL-250 ASTM class 35</p> <p data-bbox="199 1653 638 1675">Wear ring: Brass</p> <p data-bbox="199 1686 734 1753">Impeller: Cast iron EN-GJL-200 ASTM class 30</p> <p data-bbox="199 1765 734 1843">Shaft: Stainless steel EN 1.4301 AISI 304</p> <p data-bbox="199 1877 343 1899"><b>Installation:</b></p> <p data-bbox="199 1910 630 1933">Maximum ambient temperature: 60 °C</p> <p data-bbox="199 1944 638 1966">Maximum operating pressure: 16 bar</p> <p data-bbox="199 1977 686 2000">Pipe connection standard: EN 1092-2</p> <p data-bbox="199 2011 638 2033">Size of inlet connection: DN 80</p> <p data-bbox="199 2045 638 2067">Size of outlet connection: DN 65</p> <p data-bbox="199 2078 686 2101">Pressure rating for pipe connection: PN 16</p> <p data-bbox="199 2112 582 2134">Pump housing with feet: Y</p>

Qty.	Description
	Support block: Y
	<b>Electrical data:</b>
	IE Efficiency class: IE3
	P2: 11 kW
	Mains frequency: 50 Hz
	Rated voltage: 3 x 380-415D/660-690Y V
	Rated current: 20,8-19,8/12,0-11,8 A
	Starting current: 660-780 %
	Cos phi - power factor: 0.88-0.84
	Rated speed: 2940-2950 rpm
	Efficiency: IE3 91,2%
	Motor efficiency at full load: 91.2 %
	Motor efficiency at 3/4 load: 91.8 %
	Motor efficiency at 1/2 load: 91.3 %
	Number of poles: 2
	Enclosure class (IEC 34-5): 55 Dust/Jetting
	Insulation class (IEC 85): F
	<b>Others:</b>
	Minimum efficiency index, MEI $\hat{\alpha}\%$ : 0.70
	Net weight: 141 kg
	Gross weight: 166 kg
	Shipping volume: 0.707 m <sup>3</sup>
	Country of origin: HU
	Custom tariff no.: 84137051

## 98139415 NB 65-125/144 ASF2ABQQE 50 Hz



Description	Value
-------------	-------

**General information:**

Product name: NB 65-125/144 ASF2ABQQE

Product No: 98139415

EAN number: 5711490335644

Price: 3.227,00 GBP

**Technical:**

Rated flow: 127 m<sup>3</sup>/h

Rated head: 20.97 m

Actual impeller diameter: 144 mm

Nominal impeller diameter: 125 mm

Shaft seal arrangement: Single

Shaft diameter: 24 mm

Code for shaft seal: BQQE

Curve tolerance: ISO9906:2012 3B

Pump version: AS

**Materials:**

Pump housing: Cast iron

EN-GJL-250

ASTM class 35

Wear ring: Brass

Impeller: Cast iron

EN-GJL-200

ASTM class 30

Shaft: Stainless steel

EN 1.4301

AISI 304

Material code: A

**Installation:**

Maximum ambient temperature: 60 °C

Maximum operating pressure: 16 bar

Pipe connection standard: EN 1092-2

Size of inlet connection: DN 80

Size of outlet connection: DN 65

Pressure rating for pipe connection: PN 16

Pump housing with feet: Y

Support block: Y

Connect code: F2

**Liquid:**

Pumped liquid: Water

Liquid temperature range: -25 .. 120 °C

Liquid temperature during operation: 20 °C

Density: 998.2 kg/m<sup>3</sup>

**Electrical data:**

IE Efficiency class: IE3

P2: 11 kW

Mains frequency: 50 Hz

Rated voltage: 3 x 380-415D/660-690Y V

Rated current: 20,8-19,8/12,0-11,8 A

Starting current: 660-780 %

Cos phi - power factor: 0.88-0.84

Rated speed: 2940-2950 rpm

Efficiency: IE3 91,2%





Motor efficiency at full load: 91.2 %

Motor efficiency at 3/4 load: 91.8 %

Motor efficiency at 1/2 load: 91.3 %

Number of poles: 2

Enclosure class (IEC 34-5): 55 Dust/Jetting

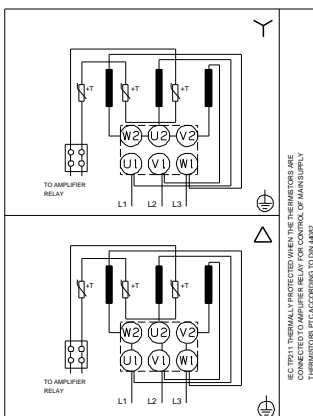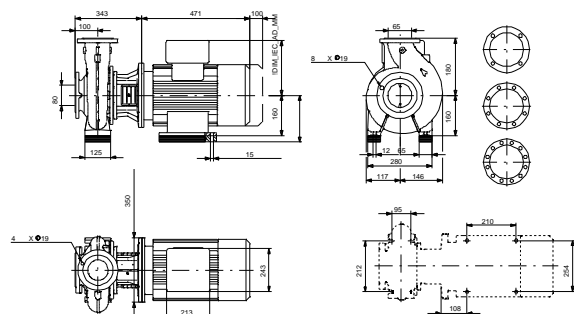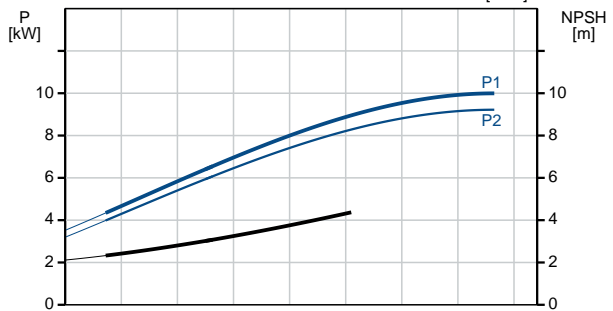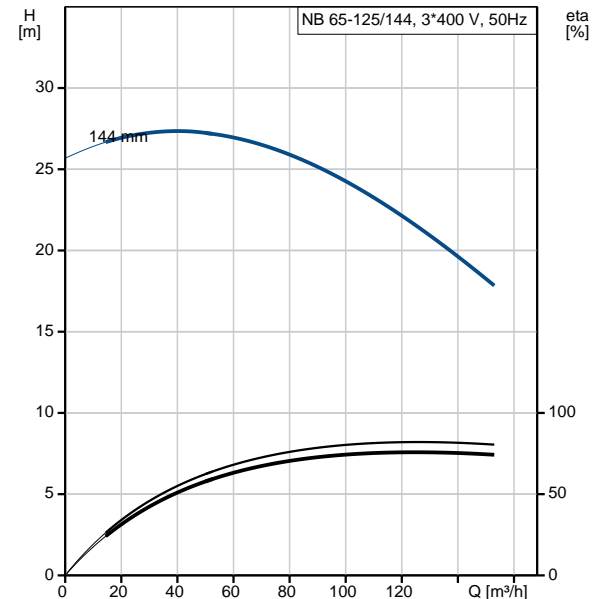



Company name:

Created by:

Phone:

Date:

21/03/2019

Description	Value
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	87420028
Mount. design. acc. IEC 34-7:	IM B35
<b>Controls:</b>	
Frequency converter:	NONE
<b>Others:</b>	
Minimum efficiency index, MEI $\eta_{\%}$ :	0.70
Net weight:	141 kg
Gross weight:	166 kg
Shipping volume:	0.707 m <sup>3</sup>
Country of origin:	HU
Custom tariff no.:	84137051

## 98139415 NB 65-125/144 ASF2ABQQE 50 Hz

