
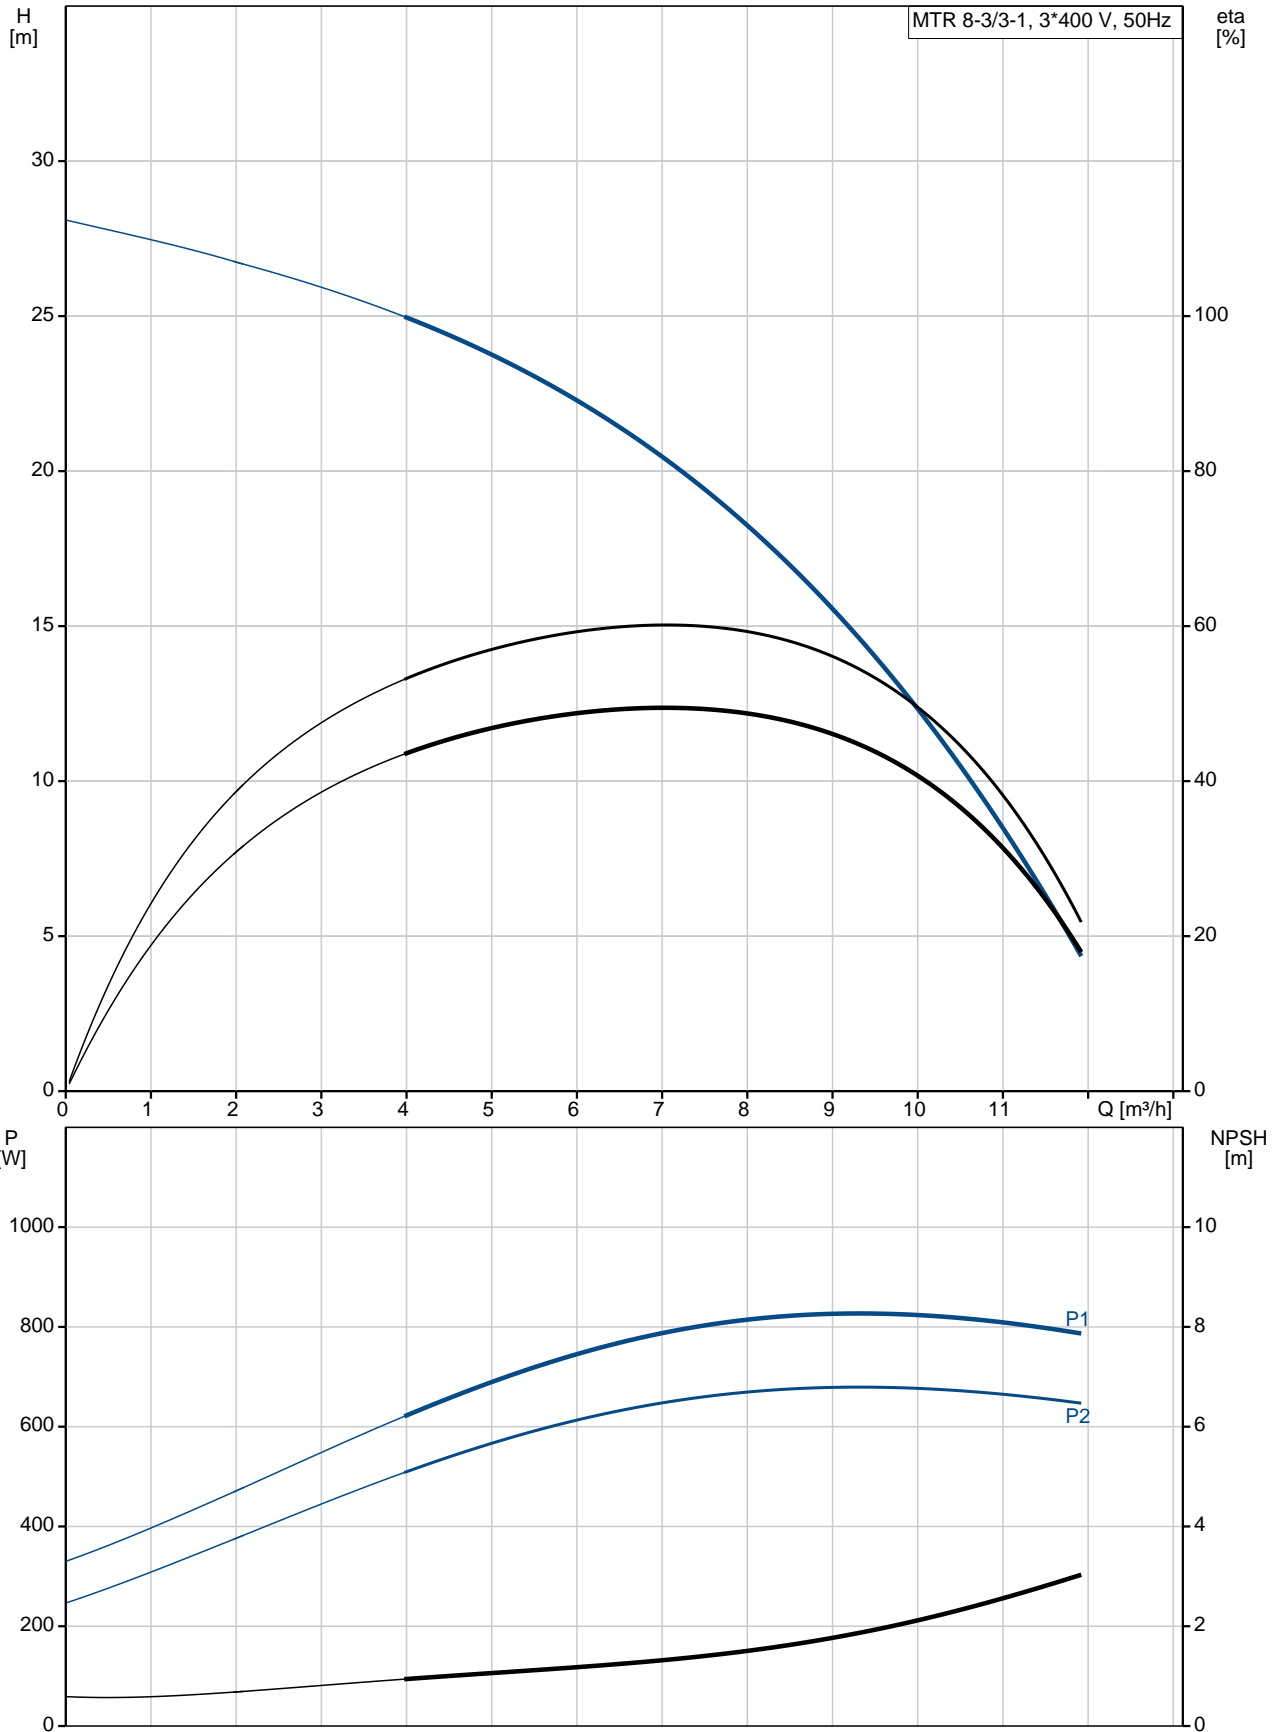






Qty.	Description
1	<p data-bbox="199 336 502 369"><b>MTR 8-3/3-1 A-W-A-HUUV</b></p> <div data-bbox="359 425 438 772" style="text-align: center;">  </div> <p data-bbox="590 772 1077 795" style="text-align: center;"><b>Note! Product picture may differ from actual product</b></p> <p data-bbox="199 801 470 828">Product No.: <a href="#">98825615</a></p> <p data-bbox="199 862 1173 918">Multistage, immersible, self-priming, centrifugal pump for vertical installation in tanks etc. The pump head and base are in cast iron – all other wetted parts are in stainless steel. The pump has the following characteristics:</p> <ul data-bbox="239 952 1141 1064" style="list-style-type: none"> <li>• Installation length according to DIN 5440.</li> <li>• Impellers, intermediate chambers and spline shaft are made of Stainless steel.</li> <li>• Mechanical shaft seal according to EN 12756.</li> <li>• Power transmission via cast-iron split coupling.</li> </ul> <p data-bbox="199 1097 1189 1153">A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. The pump is fitted with a 3-phase, fan-cooled asynchronous motor.</p> <p data-bbox="199 1243 638 1310"><b>Controls:</b> Frequency converter:                    NONE</p> <p data-bbox="199 1332 782 1489"><b>Liquid:</b> Pumped liquid:                            Water Liquid temperature range:            -10 .. 90 °C Selected liquid temperature:        20 °C Density at selected liquid temperature: 998.2 kg/m<sup>3</sup></p> <p data-bbox="199 1512 821 1780"><b>Technical:</b> Pump speed on which pump data are based: 2860 rpm Rated flow:                                 8 m<sup>3</sup>/h Rated head:                                 18.6 m Chambers:                                 3 Drainage back to tank:                 N Pump orientation:                         Vertical Code for shaft seal:                     HUUV Curve tolerance:                         ISO9906:2012 3B</p> <p data-bbox="199 1803 813 2016"><b>Materials:</b> Pump head:                                 Cast iron     EN 1561 EN-GJL-200     ASTM A48-25B Impeller:                                     Stainless steel     EN 1.4301     AISI 304</p> <p data-bbox="199 2038 630 2105"><b>Installation:</b> Maximum ambient temperature: 60 °C</p>

Qty.	Description
	<p>Maximum operating pressure: 25 bar            Max pressure at stated temp: 25 bar / 90 °C            Type of connection: G            Size of outlet connection: 1 1/4 inch            Immersion depth: 250 mm            Flange size for motor: FT100</p> <p><b>Electrical data:</b>            Motor standard: IEC            Motor type: 80A            IE Efficiency class: IE3            Rated power - P2: 0.75 kW            Mains frequency: 50 Hz            Rated voltage: 3 x 220-240D/380-415Y V            Rated current: 3.30/1.90 A            Starting current: 580-620 %            Cos phi - power factor: 0.81-0.71            Rated speed: 2840-2870 rpm            Efficiency: IE3 80,7%            Motor efficiency at full load: 80.7 %            Motor efficiency at 3/4 load: 82.7 %            Motor efficiency at 1/2 load: 81.7 %            Number of poles: 2            Enclosure class (IEC 34-5): 55 Dust/Jetting            Insulation class (IEC 85): F            Motor No: 85U05104</p> <p><b>Others:</b>            Terminal box position: 6            Minimum efficiency index, MEI : 0.70            Net weight: 19.4 kg            Gross weight: 22.6 kg            Shipping volume: 0.05 m<sup>3</sup>            Country of origin: HU            Custom tariff no.: 84137075</p>

## 98825615 MTR 8-3/3-1 A-W-A-HUUV 50 Hz



Description	Value
<b>General information:</b>	
Product name:	MTR 8-3/3-1 A-W-A-HUUV
Product No:	98825615
EAN number:	5712601937863
Price:	5712601937863
	875,00 GBP
<b>Technical:</b>	
Pump speed on which pump data are based:	2860 rpm
Rated flow:	8 m <sup>3</sup> /h
Rated head:	18.6 m
Chambers:	3
Impellers:	3
Number of reduced-diameter impellers:	1
Drainage back to tank:	N
Pump orientation:	Vertical
Code for shaft seal:	HUUV
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
<b>Materials:</b>	
Pump head:	Cast iron
	EN 1561 EN-GJL-200
	ASTM A48-25B
Impeller:	Stainless steel
	EN 1.4301
	AISI 304
Material code:	A
<b>Installation:</b>	
Maximum ambient temperature:	60 °C
Maximum operating pressure:	25 bar
Max pressure at stated temp:	25 bar / 90 °C
Type of connection:	G
Size of outlet connection:	1 1/4 inch
Immersion depth:	250 mm
Flange size for motor:	FT100
Connect code:	W
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 90 °C
Selected liquid temperature:	20 °C
Density at selected liquid temperature:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Motor standard:	IEC
Motor type:	80A
IE Efficiency class:	IE3
Rated power - P2:	0.75 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415Y V
Rated current:	3.30/1.90 A
Starting current:	580-620 %
Cos phi - power factor:	0.81-0.71
Rated speed:	2840-2870 rpm
Efficiency:	IE3 80,7%
Motor efficiency at full load:	80.7 %
Motor efficiency at 3/4 load:	82.7 %
Motor efficiency at 1/2 load:	81.7 %

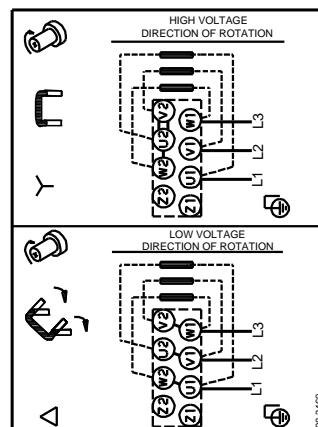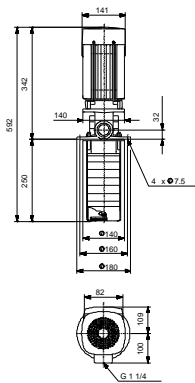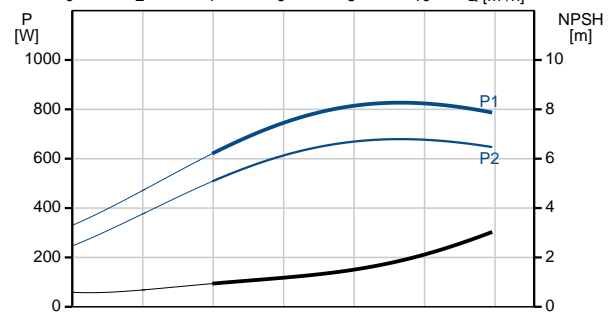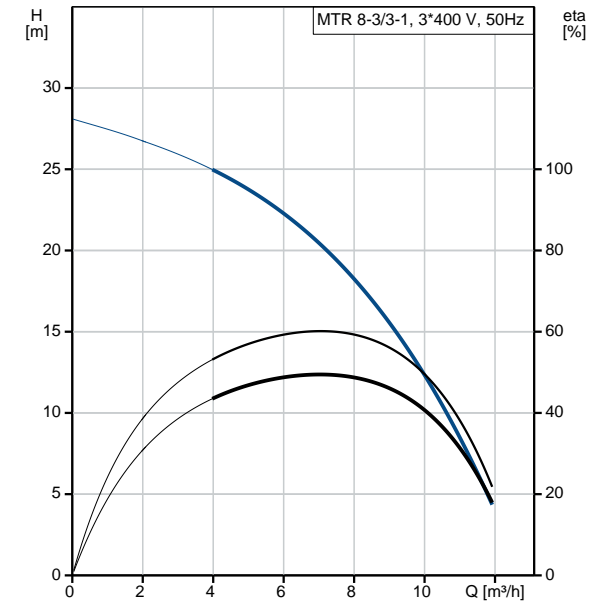



Company name:

Created by:

Phone:

Date:

15/10/2019

Description	Value
Number of poles:	2
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	NONE
Motor No:	85U05104
<b>Controls:</b>	
Frequency converter:	NONE
<b>Others:</b>	
Terminal box position:	6
Minimum efficiency index, MEI :	0.70
Net weight:	19.4 kg
Gross weight:	22.6 kg
Shipping volume:	0.05 m <sup>3</sup>
Country of origin:	HU
Custom tariff no.:	84137075

## 98825615 MTR 8-3/3-1 A-W-A-HUUV 50 Hz

