
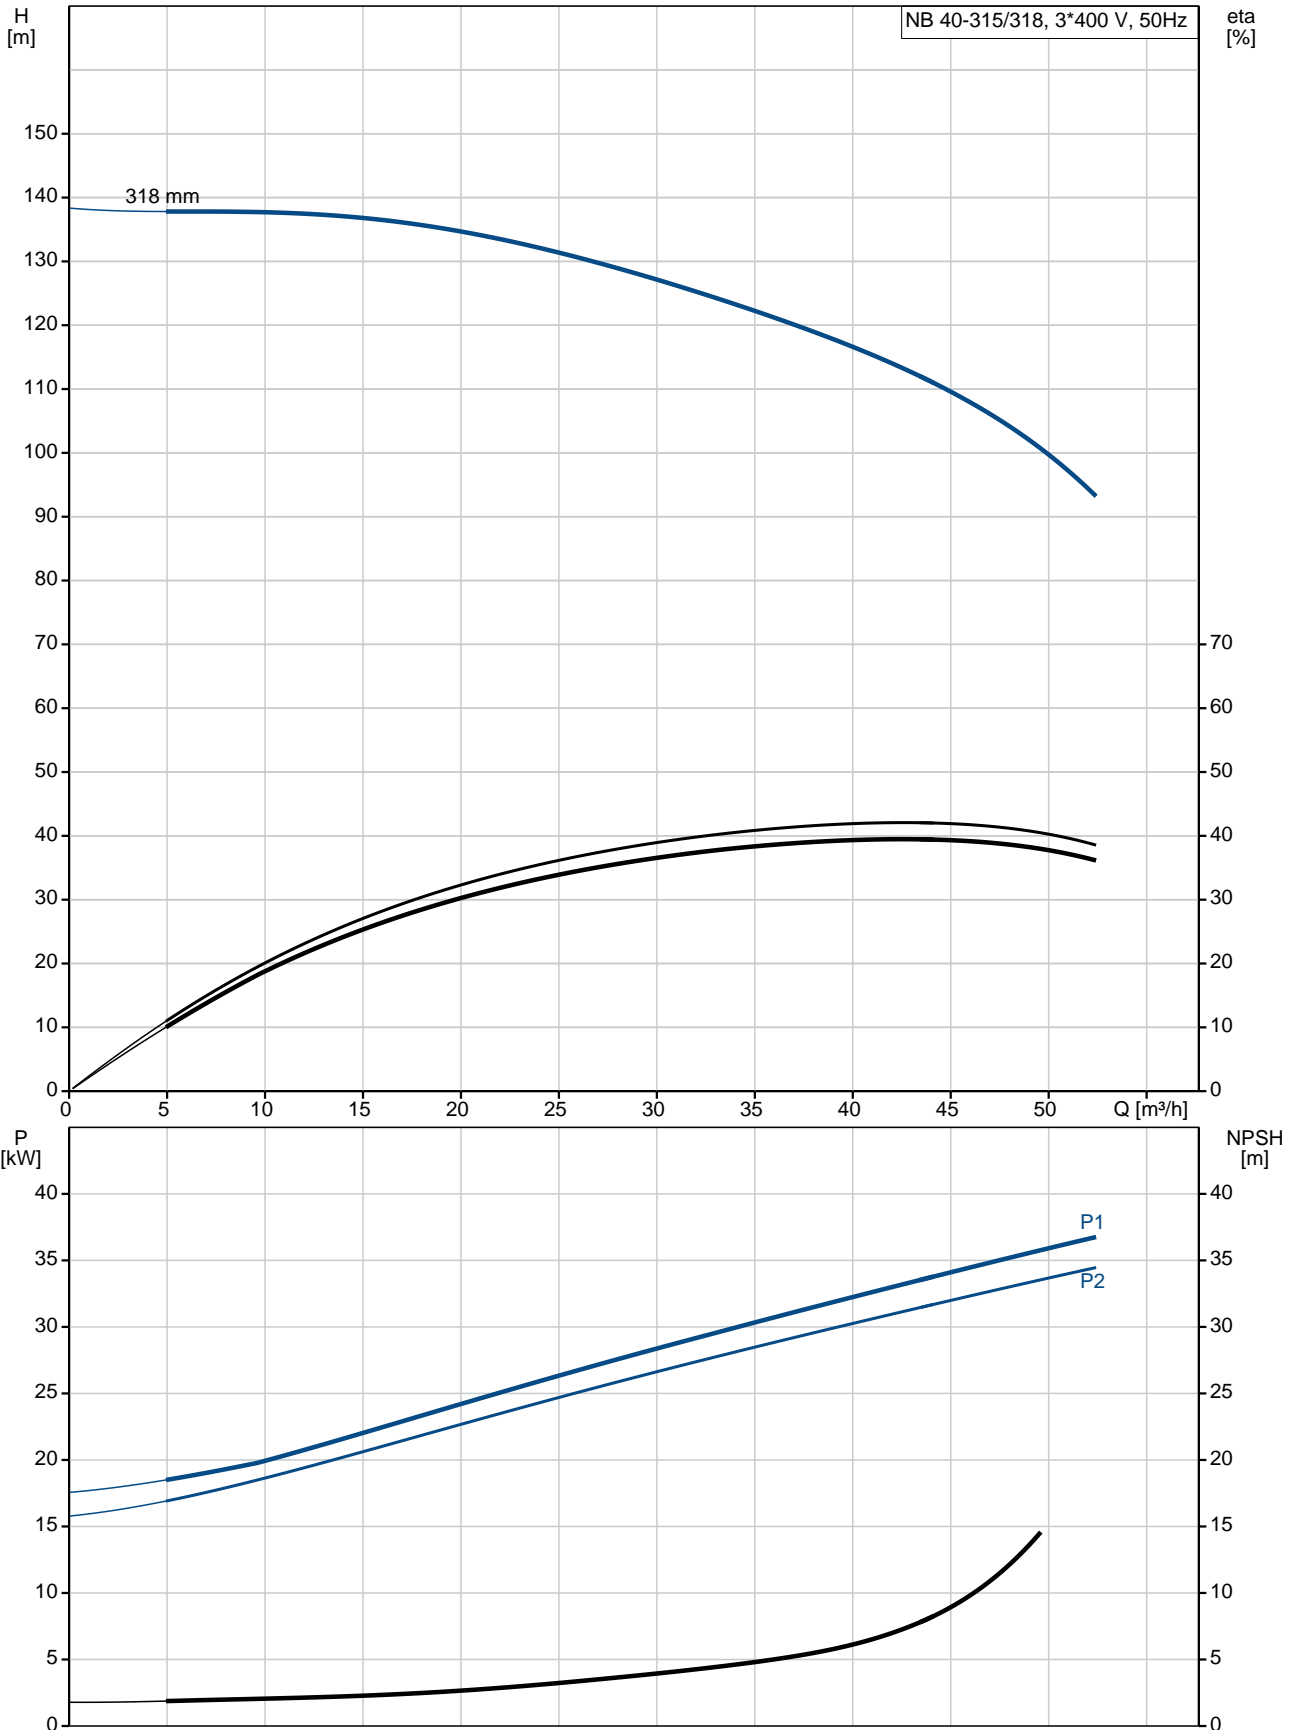


Qty.	Description
1	<p data-bbox="199 342 534 365">NB 40-315/318 ASF2ABQQE</p> <div data-bbox="220 405 566 633">  </div> <p data-bbox="592 629 1077 651" style="text-align: center;">Note! Product picture may differ from actual product</p> <p data-bbox="199 663 470 685">Product No.: 98975675</p> <p data-bbox="199 719 1460 775">Non-self-priming, single-stage, centrifugal volute pump designed according to ISO 5199 with dimensions and rated performance according to EN 733 (10 bar).</p> <p data-bbox="199 808 1460 887">Flanges are PN 16 with dimensions according to EN 1092-2. The pump has an axial suction port, radial discharge port, horizontal shaft and a back pull-out design enabling removal of the motor, motor stool, cover and impeller without disturbing the pump housing or pipework.</p> <p data-bbox="199 898 941 920">The unbalanced rubber bellows seal is according to DIN EN 12756.</p> <p data-bbox="199 925 909 947">The pump is close-coupled to a fan-cooled asynchronous motor.</p> <p data-bbox="199 981 311 1003">Controls:</p> <p data-bbox="199 1014 638 1037">Frequency converter: NONE</p> <p data-bbox="199 1070 287 1093">Liquid:</p> <p data-bbox="199 1104 638 1126">Pumped liquid: Water</p> <p data-bbox="199 1137 710 1160">Liquid temperature range: -25 .. 120 °C</p> <p data-bbox="199 1171 686 1193">Liquid temperature during operation: 20 °C</p> <p data-bbox="199 1205 702 1227">Density: 998.2 kg/m³</p> <p data-bbox="199 1261 327 1283">Technical:</p> <p data-bbox="199 1294 678 1317">Rated flow: 44.8 m³/h</p> <p data-bbox="199 1328 662 1350">Rated head: 109.2 m</p> <p data-bbox="199 1361 662 1384">Actual impeller diameter: 318 mm</p> <p data-bbox="199 1395 662 1417">Nominal impeller diameter: 315 mm</p> <p data-bbox="199 1429 638 1451">Shaft seal arrangement: Single</p> <p data-bbox="199 1462 638 1485">Code for shaft seal: BQQE</p> <p data-bbox="199 1496 766 1518">Curve tolerance: ISO9906:2012 3B</p> <p data-bbox="199 1552 319 1574">Materials:</p> <p data-bbox="199 1585 734 1641">Pump housing: Cast iron EN-GJL-250 ASTM class 35</p> <p data-bbox="199 1653 638 1675">Wear ring: Brass</p> <p data-bbox="199 1686 734 1753">Impeller: Cast iron EN-GJL-200 ASTM class 30</p> <p data-bbox="199 1765 734 1843">Shaft: Stainless steel EN 1.4301 AISI 304</p> <p data-bbox="199 1877 343 1899">Installation:</p> <p data-bbox="199 1910 630 1933">Maximum ambient temperature: 55 °C</p> <p data-bbox="199 1944 638 1966">Maximum operating pressure: 16 bar</p> <p data-bbox="199 1977 686 2000">Pipe connection standard: EN 1092-2</p> <p data-bbox="199 2011 638 2033">Size of inlet connection: DN 65</p> <p data-bbox="199 2045 638 2067">Size of outlet connection: DN 40</p> <p data-bbox="199 2078 686 2101">Pressure rating for pipe connection: PN 16</p> <p data-bbox="199 2112 582 2134">Pump housing with feet: Y</p>

Qty.	Description
	Support block: Y
	Electrical data:
	IE Efficiency class: IE3
	P2: 37 kW
	Mains frequency: 50 Hz
	Rated voltage: 3 x 380-420D/660-725Y V
	Rated current: 68,0-63,0/39,0-36,0 A
	Starting current: 670-670 %
	Cos phi - power factor: 0.87
	Rated speed: 2955 rpm
	Efficiency: IE3 93,7%
	Motor efficiency at full load: 93.7-93.7 %
	Motor efficiency at 3/4 load: 93.9-93.9 %
	Motor efficiency at 1/2 load: 93.5-93.5 %
	Number of poles: 2
	Enclosure class (IEC 34-5): 55 Dust/Jetting
	Insulation class (IEC 85): F
	Others:
	Minimum efficiency index, MEI $\hat{\%}$: 0.70
	Net weight: 363 kg
	Gross weight: 388 kg
	Shipping volume: 0.707 m ³
	Country of origin: HU
	Custom tariff no.: 84137051

98975675 NB 40-315/318 ASF2ABQQE 50 Hz





Company name:

Created by:

Phone:

Date:

21/03/2019

Description	Value
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	99032147
Mount. design. acc. IEC 34-7:	IM B35
Controls:	
Frequency converter:	NONE
Others:	
Minimum efficiency index, MEI $\eta_{\%}$:	0.70
Net weight:	363 kg
Gross weight:	388 kg
Shipping volume:	0.707 m ³
Country of origin:	HU
Custom tariff no.:	84137051