

Qty. Description

1 MTH 2-4/4 A-W-A-AQQV



Note! Product picture may differ from actual product

Product No.: [98992589](#)

Multistage, immersible, self-priming, centrifugal pump for vertical installation in tanks etc.

The pump has the following characteristics:

- Installation length according to DIN 5440.
- Impellers, intermediate chambers and spline shaft are made of Stainless steel.
- Mechanical shaft seal according to EN 12756.

The pump is close-coupled with a 3-phase motor.

Liquid:

Pumped liquid: Water
 Liquid temperature range: -10 .. 90 °C
 Selected liquid temperature: 20 °C
 Density at selected liquid temperature: 998.2 kg/m³

Technical:

Rated flow: 2.5 m³/h
 Rated head: 26 m
 Chambers: 4
 Code for shaft seal: AQQV
 Curve tolerance: ISO9906:2012 3B

Materials:

Pump housing: Cast iron
 EN 1561 EN-GJL-200
 ASTM A48-25B
 Impeller: Stainless steel
 EN 1.4301
 AISI 304

Installation:

Maximum ambient temperature: 40 °C
 Maximum operating pressure: 10 bar
 Max pressure at stated temp: 10 bar / 90 °C
 Type of connection: Rp
 Size of outlet connection: 3/4 inch
 Immersion depth: 163 mm

Electrical data:

Motor standard: IEC
 Frame size: 80
 Multi plug: No
 IE efficiency class: IE3


Qty.	Description
------	-------------

Rated power - P2:	0.75 kW
Mains frequency:	50 Hz
Phases:	3
Rated voltage:	220-240D/380-415Y V
Service factor:	1.30
Rated current:	3.30/1.90 A
Starting current:	580-620 %
Rated speed:	2855 rpm
Enclosure class (IEC 34-5):	IP54
Insulation class (IEC 85):	F
Built-in motor protection:	NONE

Others:

Terminal box position:	6
Minimum efficiency index, MEI :	0.70
Net weight:	16.5 kg
Gross weight:	17.6 kg
Country of origin:	HU
Custom tariff no.:	84137075

98992589 MTH 2-4/4 A-W-A-AQQV 50 Hz

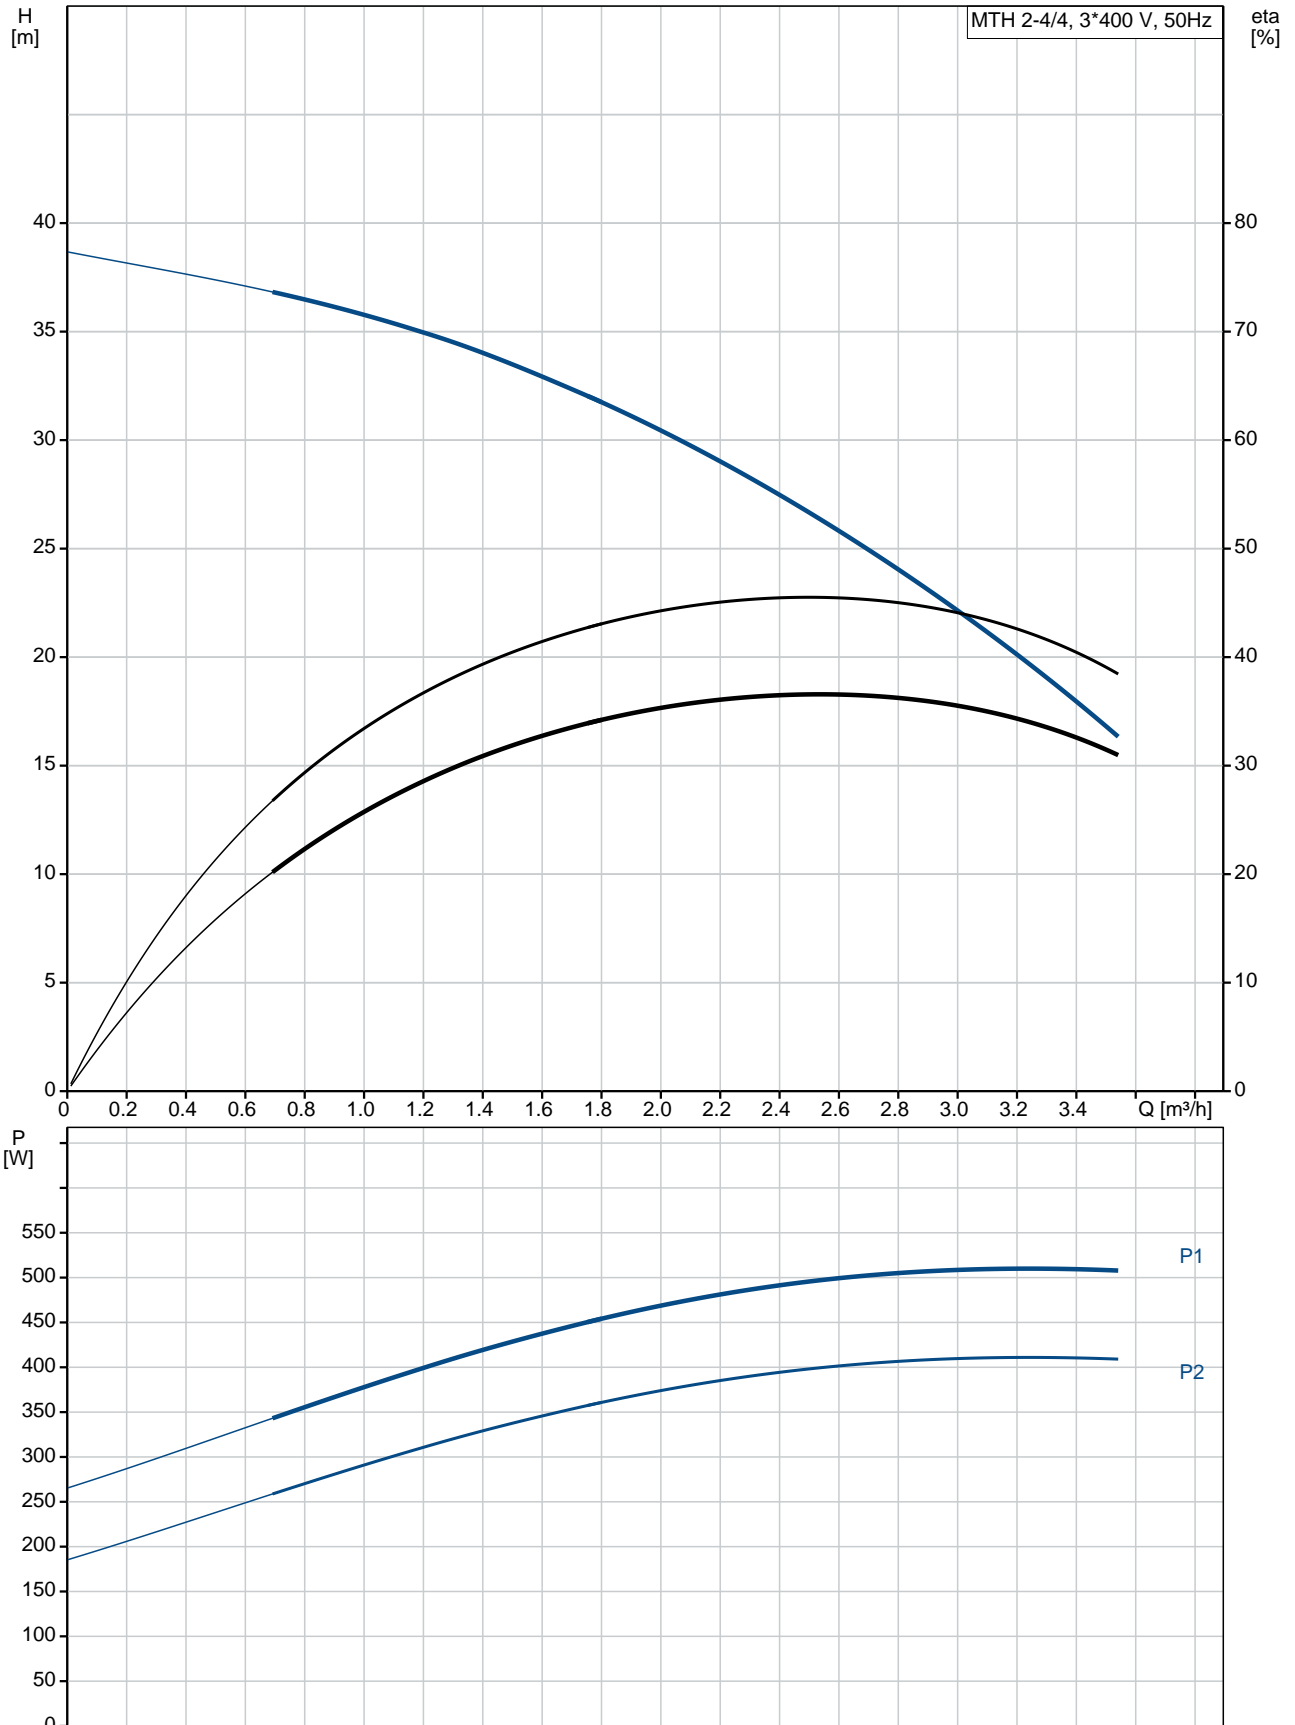

Description	Value
General information:	
Product name:	MTH 2-4/4 A-W-A-AQQV
Product No:	98992589
EAN number:	5712604834350
	5712604834350
Price:	700,00 GBP
Technical:	
Rated flow:	2.5 m³/h
Rated head:	26 m
Chambers:	4
Impellers:	4
Code for shaft seal:	AQQV
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Materials:	
Pump housing:	Cast iron
	EN 1561 EN-GJL-200
	ASTM A48-25B
Impeller:	Stainless steel
	EN 1.4301
	AISI 304
Material code:	A
Installation:	
Maximum ambient temperature:	40 °C
Maximum operating pressure:	10 bar
Max pressure at stated temp:	10 bar / 90 °C
Type of connection:	Rp
Size of outlet connection:	3/4 inch
Immersion depth:	163 mm
Connect code:	W
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 90 °C
Selected liquid temperature:	20 °C
Density at selected liquid temperature:	998.2 kg/m³
Electrical data:	
Motor standard:	IEC
Frame size:	80
Multi plug:	No
IE efficiency class:	IE3
Rated power - P2:	0.75 kW
Mains frequency:	50 Hz
Phases:	3
Rated voltage:	220-240D/380-415Y V
Service factor:	1.30
Rated current:	3.30/1.90 A
Starting current:	580-620 %
Rated speed:	2855 rpm
Enclosure class (IEC 34-5):	IP54
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Others:	
Terminal box position:	6
Minimum efficiency index, MEI :	0.70
Net weight:	16.5 kg
Gross weight:	17.6 kg
Country of origin:	HU
Custom tariff no.:	84137075

