

Qty. Description

1 MTH 2-8/8 A-W-A-AQQV



Note! Product picture may differ from actual product

Product No.: [98992642](#)

Multistage, immersible, self-priming, centrifugal pump for vertical installation in tanks etc.

The pump has the following characteristics:

- Installation length according to DIN 5440.
- Impellers, intermediate chambers and spline shaft are made of Stainless steel.
- Mechanical shaft seal according to EN 12756.

The pump is close-coupled with a 3-phase motor.

Liquid:

Pumped liquid: Water
Liquid temperature range: -10 .. 90 °C
Selected liquid temperature: 20 °C
Density at selected liquid temperature: 998.2 kg/m³

Technical:

Rated flow: 2.5 m³/h
Rated head: 52 m
Chambers: 8
Code for shaft seal: AQQV
Curve tolerance: ISO9906:2012 3B

Materials:

Pump housing: Cast iron
EN 1561 EN-GJL-200
ASTM A48-25B
Impeller: Stainless steel
EN 1.4301
AISI 304

Installation:

Maximum ambient temperature: 40 °C
Maximum operating pressure: 10 bar
Max pressure at stated temp: 10 bar / 90 °C
Type of connection: Rp
Size of outlet connection: 3/4 inch
Immersion depth: 235 mm

Electrical data:

Motor standard: IEC
Frame size: 80
Multi plug: No
IE efficiency class: IE3



Company name:

Created by:


Phone:

Date:

15/10/2019

| Qty. | Description |
|------|--------------------------------------|
| | Rated power - P2: 1.1 kW |
| | Mains frequency: 50 Hz |
| | Phases: 3 |
| | Rated voltage: 220-240D/380-415Y V |
| | Service factor: 1.30 |
| | Rated current: 4.35/2.55 A |
| | Starting current: 450-500 % |
| | Rated speed: 2855 rpm |
| | Enclosure class (IEC 34-5): IP54 |
| | Insulation class (IEC 85): F |
| | Built-in motor protection: NONE |
| | Others: |
| | Terminal box position: 6 |
| | Minimum efficiency index, MEI : 0.70 |
| | Net weight: 16.6 kg |
| | Gross weight: 17.7 kg |
| | Country of origin: HU |
| | Custom tariff no.: 84137075 |

98992642 MTH 2-8/8 A-W-A-AQQV 50 Hz

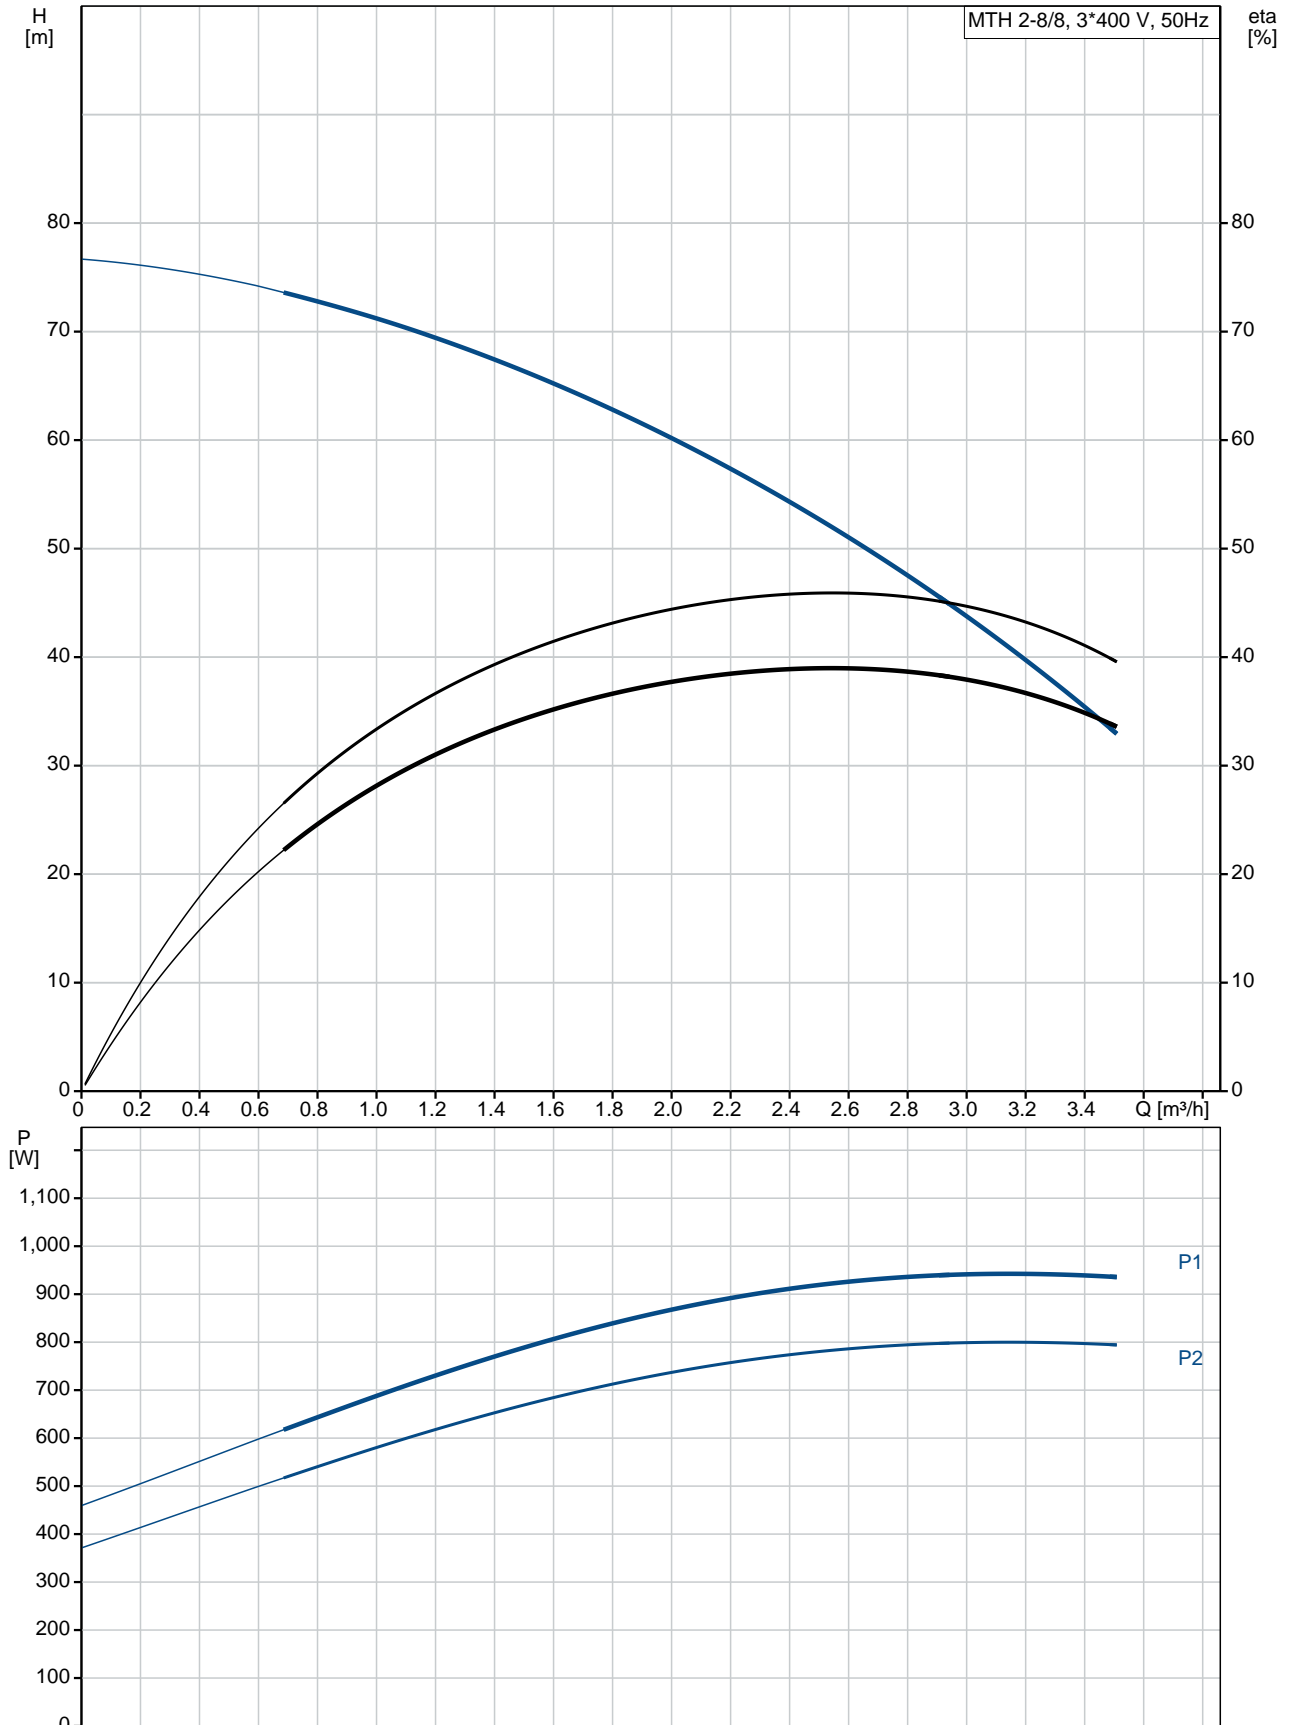

| Description | Value |
|---|-------------------------|
| General information: | |
| Product name: | MTH 2-8/8 A-W-A-AQQV |
| Product No: | 98992642 |
| EAN number: | 5712604834886 |
| | 5712604834886 |
| Price: | 769,00 GBP |
| Technical: | |
| Rated flow: | 2.5 m ³ /h |
| Rated head: | 52 m |
| Chambers: | 8 |
| Impellers: | 8 |
| Code for shaft seal: | AQQV |
| Curve tolerance: | ISO9906:2012 3B |
| Pump version: | A |
| Materials: | |
| Pump housing: | Cast iron |
| | EN 1561 EN-GJL-200 |
| | ASTM A48-25B |
| Impeller: | Stainless steel |
| | EN 1.4301 |
| | AISI 304 |
| Material code: | A |
| Installation: | |
| Maximum ambient temperature: | 40 °C |
| Maximum operating pressure: | 10 bar |
| Max pressure at stated temp: | 10 bar / 90 °C |
| Type of connection: | Rp |
| Size of outlet connection: | 3/4 inch |
| Immersion depth: | 235 mm |
| Connect code: | W |
| Liquid: | |
| Pumped liquid: | Water |
| Liquid temperature range: | -10 .. 90 °C |
| Selected liquid temperature: | 20 °C |
| Density at selected liquid temperature: | 998.2 kg/m ³ |
| Electrical data: | |
| Motor standard: | IEC |
| Frame size: | 80 |
| Multi plug: | No |
| IE efficiency class: | IE3 |
| Rated power - P2: | 1.1 kW |
| Mains frequency: | 50 Hz |
| Phases: | 3 |
| Rated voltage: | 220-240D/380-415Y V |
| Service factor: | 1.30 |
| Rated current: | 4.35/2.55 A |
| Starting current: | 450-500 % |
| Rated speed: | 2855 rpm |
| Enclosure class (IEC 34-5): | IP54 |
| Insulation class (IEC 85): | F |
| Built-in motor protection: | NONE |
| Others: | |
| Terminal box position: | 6 |
| Minimum efficiency index, MEI : | 0.70 |
| Net weight: | 16.6 kg |
| Gross weight: | 17.7 kg |
| Country of origin: | HU |
| Custom tariff no.: | 84137075 |

