


Qty. Description

1 **MAGNA1 65-100 F N**



Product No.: [99221397](#)

The new MAGNA1 is the simple option for a job well done. It is the perfect choice when replacing older circulators and due to its compliance with the EuP 2015 regulations, substantial savings on electricity is a reality. The ideal choice for basic performance needs in applications where basic system control and monitoring is desired.

- Monitoring via the fault relay, ensuring peace of mind
- Digital start/stop input available for remote pump control
- Continuous operation and reduced downtime with the wireless twin pump function (available on twin-head pumps)
- High energy efficiency resulting in substantial savings on electricity
- Easy setup and operation via the simple user interface
- No maintenance due to the canned-rotor type design.

MAGNA1 is the simple and efficient choice for most applications including

- Heating
 - Main pump
 - Mixing loops
 - Heating surfaces
- Cooling
 - Air conditioning surfaces
 - Ground source heat pump systems
 - Smaller chiller applications

Liquid:

Pumped liquid: Water
 Liquid temperature range: -10 .. 110 °C
 Liquid temperature during operation: 60 °C
 Density: 983.2 kg/m³

Technical:

TF class: 110
 Approvals on nameplate: CE,VDE,EAC,CN ROHS,WEEE

Materials:



Pump housing: Stainless steel
 EN 1.4308
 ASTM 351 CF8
 Impeller: PES 30%GF

Installation:


Range of ambient temperature: 0 .. 40 °C
 Maximum operating pressure: 10 bar
 Flange standard: DIN
 Pipe connection: DN 65
 Pressure rating: PN6/10
 Port-to-port length: 340 mm

| Qty. | Description |
|------|--|
| | <p>Electrical data:</p> <p>Power input - P1: 24.68 .. 619 W Mains frequency: 50 Hz Rated voltage: 1 x 230 V Maximum current consumption: 0.26 .. 2.73 A Enclosure class (IEC 34-5): X4D Insulation class (IEC 85): F</p> <p>Others:</p> <p>Energy (EEI): 0.20 Net weight: 22.7 kg Gross weight: 24.6 kg Shipping volume: 0.057 m³ Country of origin: DE Custom tariff no.: 84137030</p> |


99221397 MAGNA1 65-100 F N 50 Hz

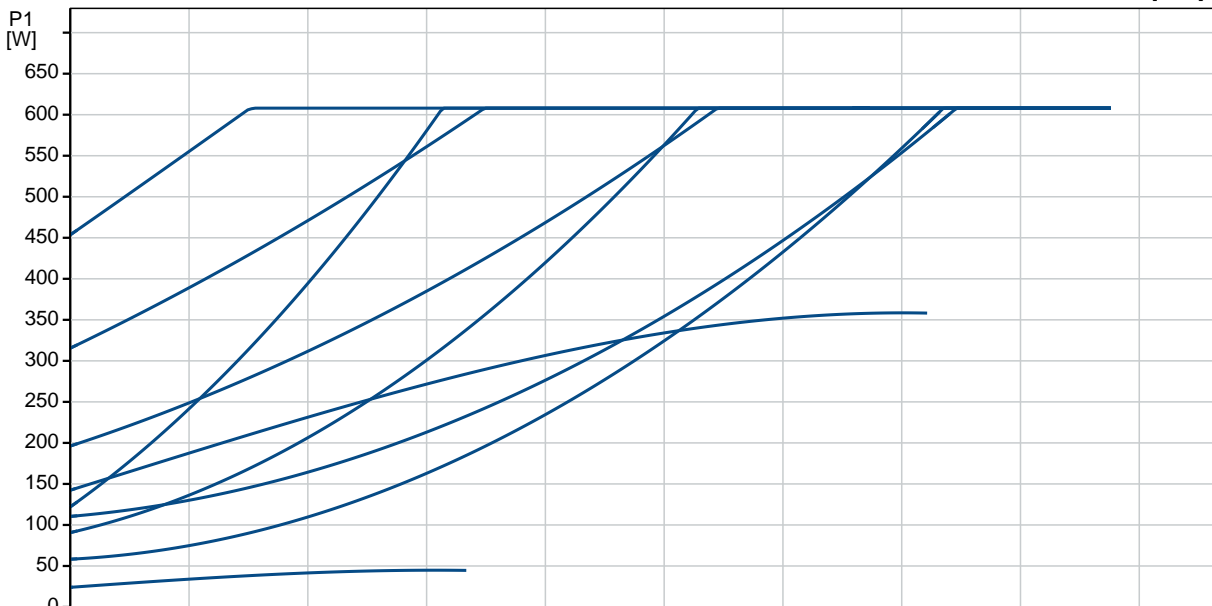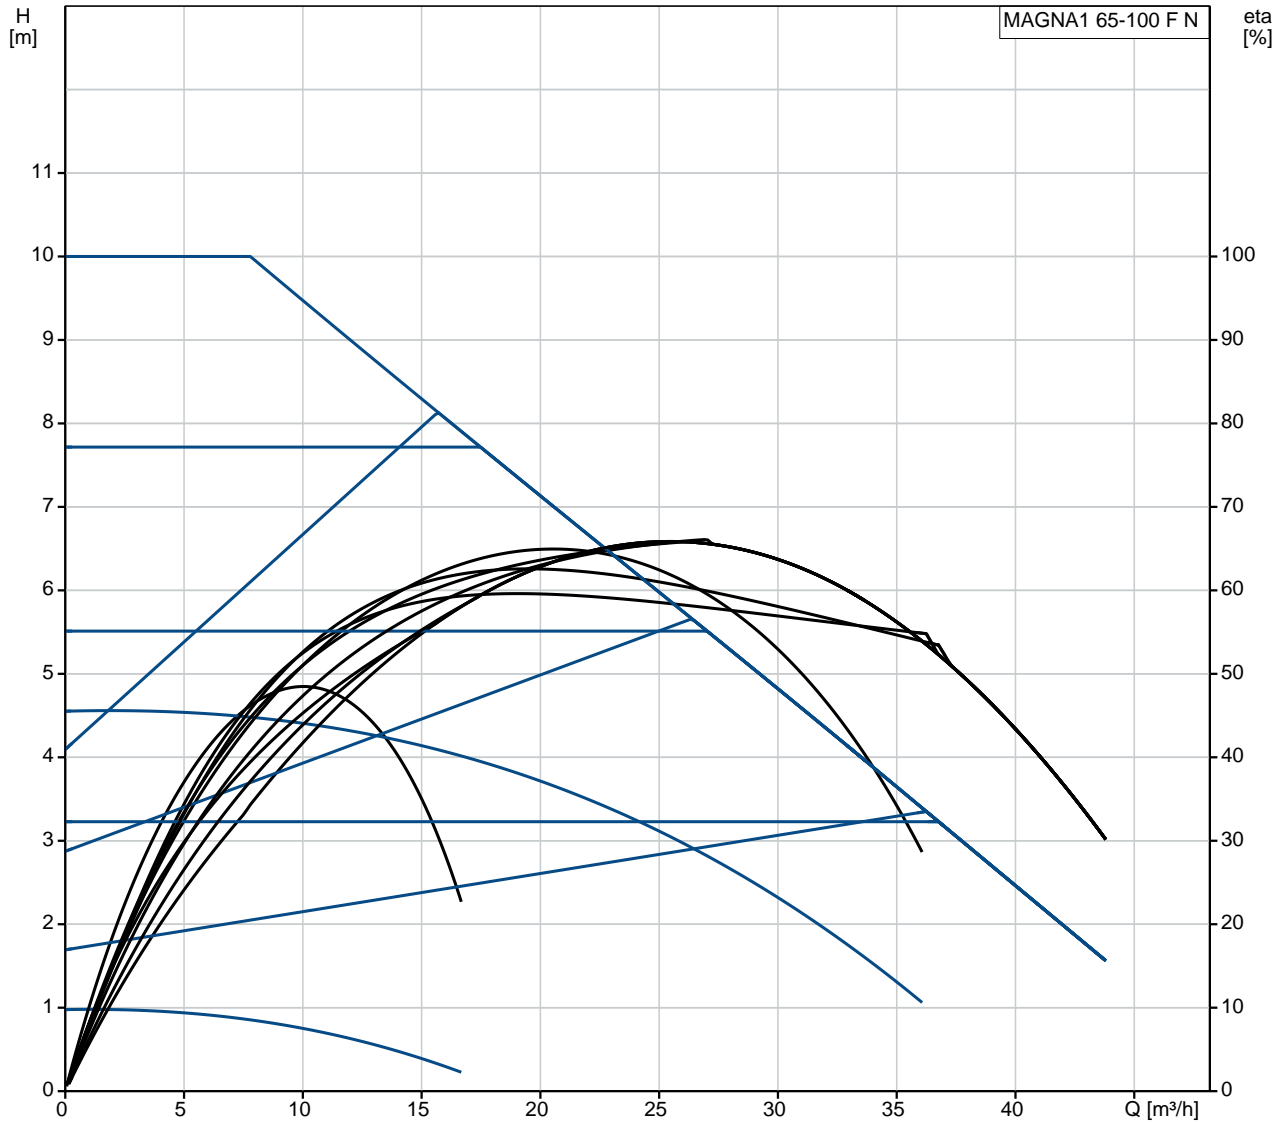

| Description | Value |
|--------------------------------------|--|
| General information: | |
| Product name: | MAGNA1 65-100 F N |
| Product No: | 99221397 |
| EAN number: | 5712608943690 |
| Price: | 2.866,00 GBP |
| Technical: | |
| Head max: | 100 dm |
| TF class: | 110 |
| Approvals on nameplate: | CE, VDE, EAC, CN ROHS, WEEE |
| Model: | C |
| Materials: | |
| Pump housing: | Stainless steel EN 1.4308 ASTM 351 CF8 |
| Impeller: | PES 30%GF |
| Installation: | |
| Range of ambient temperature: | 0 .. 40 °C |
| Maximum operating pressure: | 10 bar |
| Flange standard: | DIN |
| Pipe connection: | DN 65 |
| Pressure rating: | PN6/10 |
| Port-to-port length: | 340 mm |
| Liquid: | |
| Pumped liquid: | Water |
| Liquid temperature range: | -10 .. 110 °C |
| Liquid temperature during operation: | 60 °C |
| Density: | 983.2 kg/m ³ |
| Electrical data: | |
| Power input - P1: | 24.68 .. 619 W |
| Mains frequency: | 50 Hz |
| Rated voltage: | 1 x 230 V |
| Maximum current consumption: | 0.26 .. 2.73 A |
| Enclosure class (IEC 34-5): | X4D |
| Insulation class (IEC 85): | F |
| Others: | |
| Energy (EEI): | 0.20 |
| Net weight: | 22.7 kg |
| Gross weight: | 24.6 kg |
| Shipping volume: | 0.057 m ³ |
| Country of origin: | DE |
| Custom tariff no.: | 84137030 |

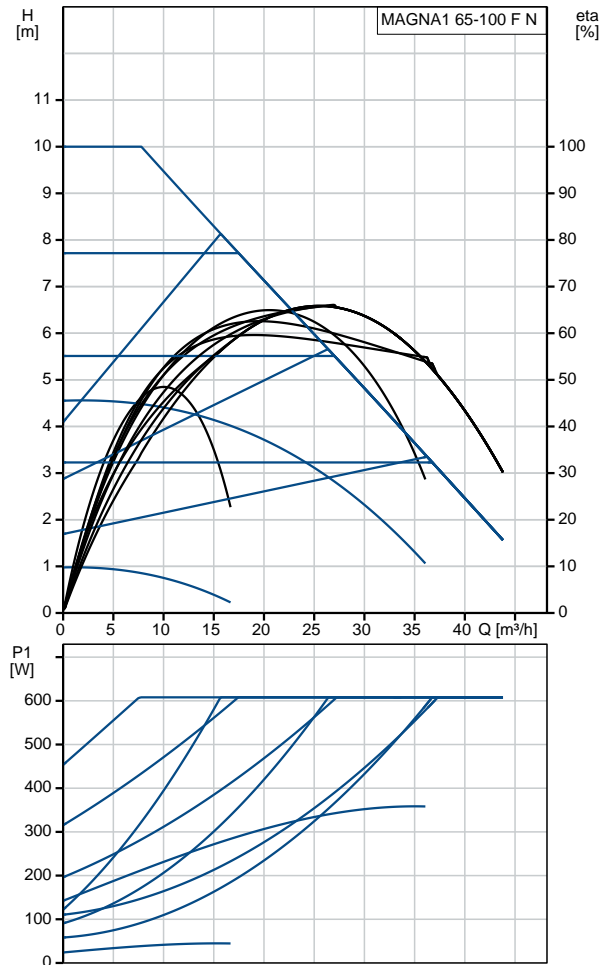


99221397 MAGNA1 65-100 F N 50 Hz

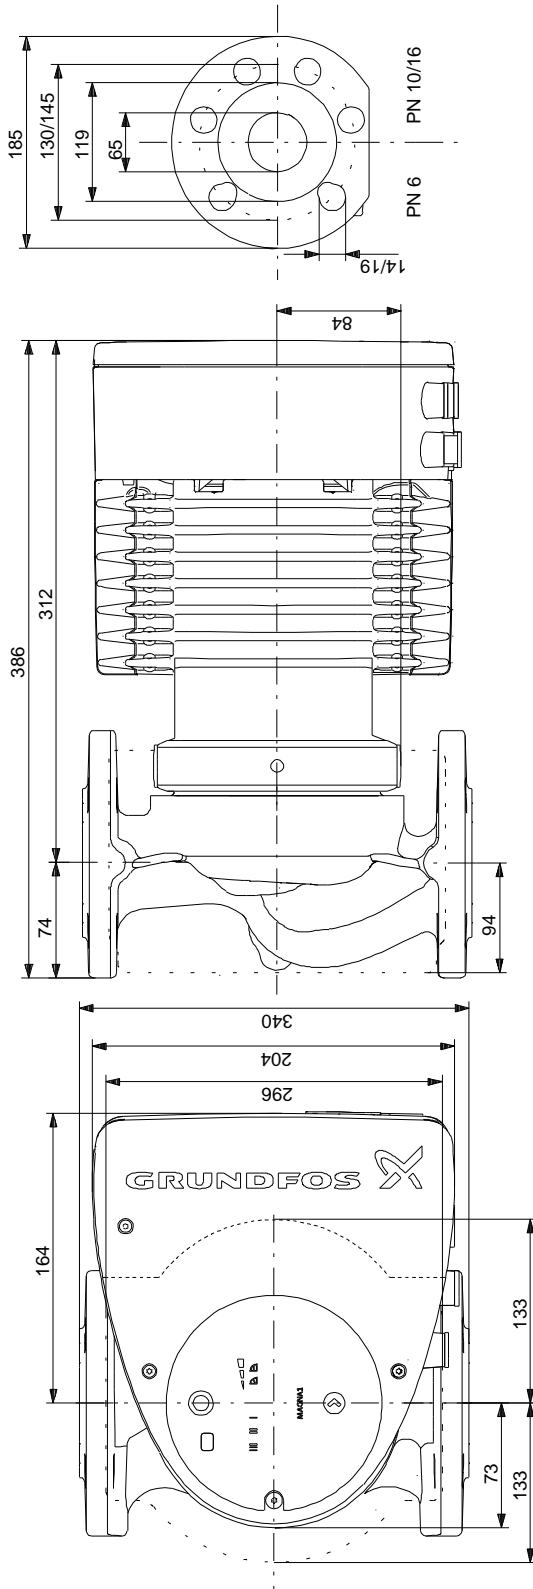

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99221397 MAGNA1 65-100 F N 50 Hz

Example of mains-connected motor with mains switch, backup fuse and additional protection

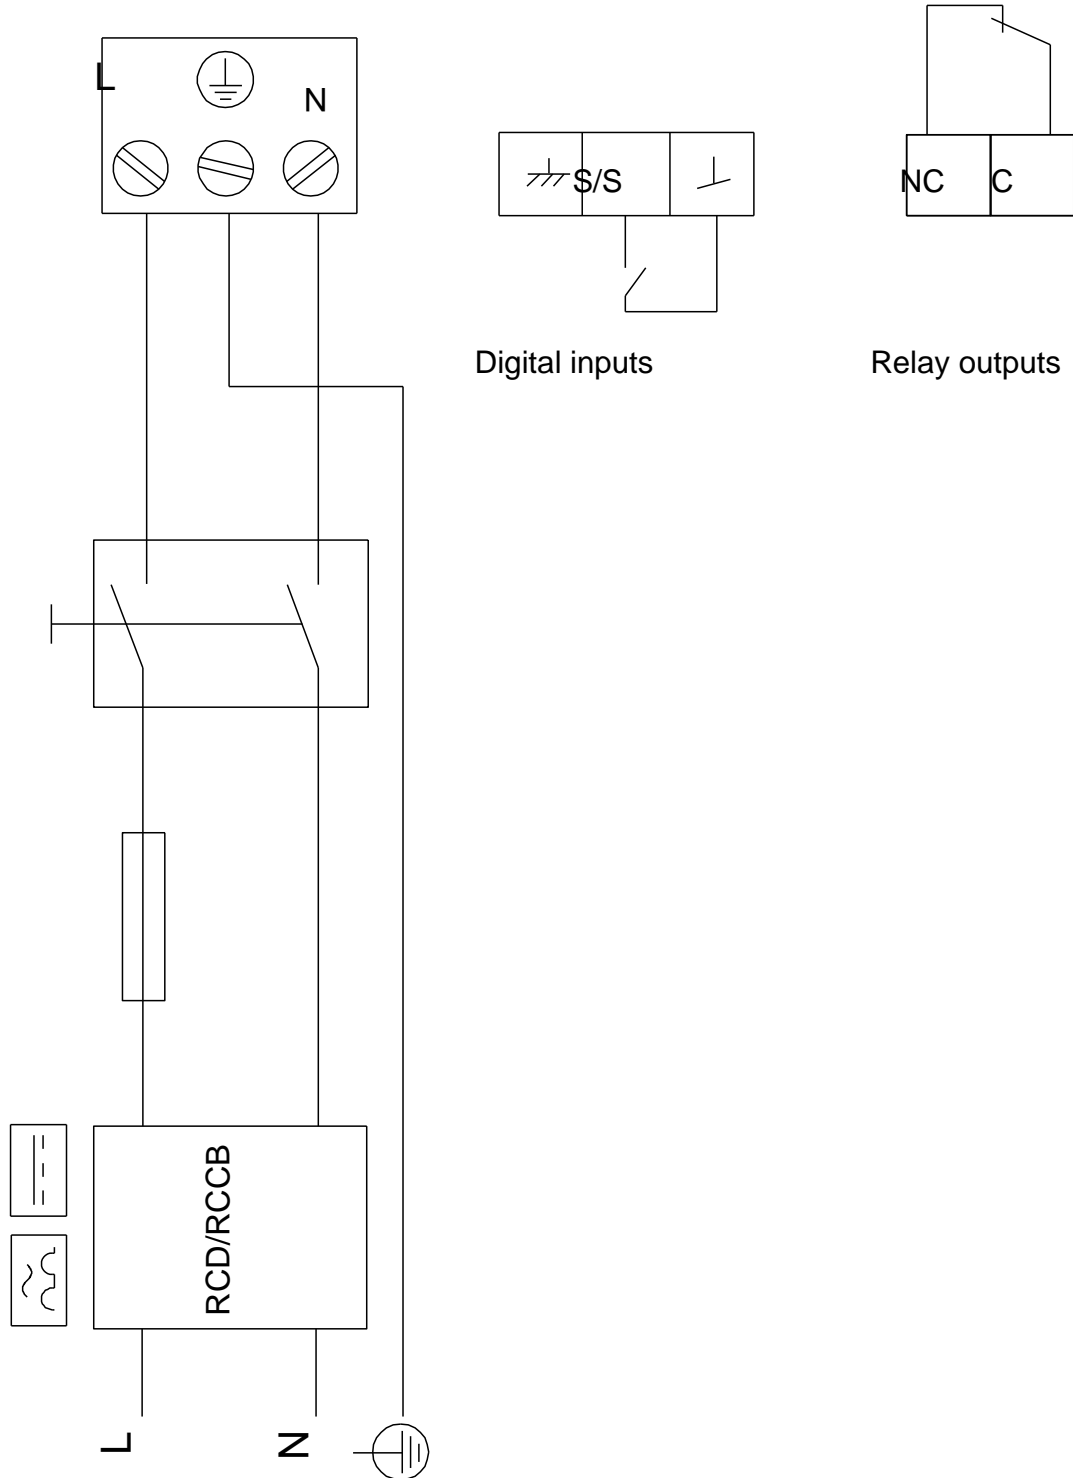

Note! All units are in [mm] unless others are stated.