






water solutions

Data sheet

DR-Steel 75 T5

Steel
series

Technical specification

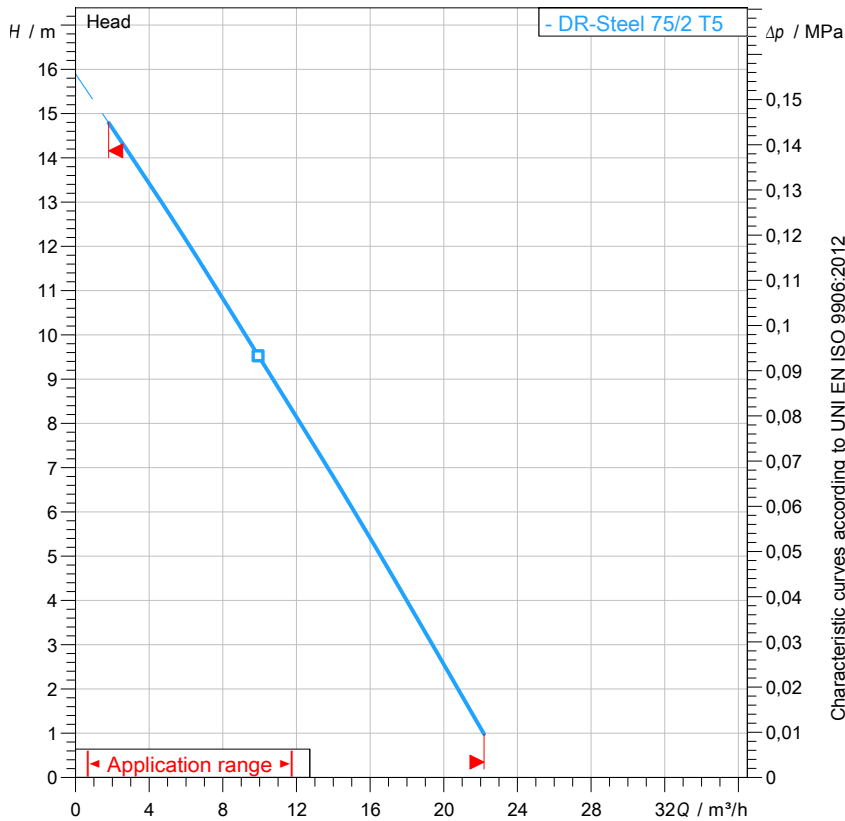3~ 50 Hz

 [mm
[inch]]

Pump

Series	Steel series
Pump name	DR-Steel 75 T5
Configuration	0 NA104000NN
Standard	EN 809:2009

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	2
Rated power P2	0,75 kW
Incoming power P1	1,20 kW
Rated current	2,4 A
rpm	2725 1/min
Efficiency	70,8 %
cos φ	0,71
Rated torque	2,6 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	F

Hydraulic

Type	DR (Multi-channel open)
Free passage	12 mm
Impeller type	Multi channel impeller
Max. hydraulic efficiency	-
Suction	-
Discharge	G 1" 1/2 -
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m ³
Max. immersion depth	10 m
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Stainless steel - AISI 304
Shaft	Stainless steel AISI 431
Hydraulic	Stainless steel - AISI 304
Impeller	Stainless steel - AISI 304
Screws	Stainless steel - Class A2-70
Gaskets	NBR
Strainer	Stainless steel - AISI 304

Construction features

Main cable	4G1
Cable length	10 m
Mechanical seals	1 in silicon carbide (SiC) and 1 in alumina graphite (AL)
Weight*	8,4 kg
Electrical variant	No electrical device equipped

* cable's weight not included



water solutions


Data sheet DR-Steel 75 T5

Steel
series

Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Multi channel impeller		Free passage 12 mm	Discharge G 1" 1/2	Suction -
DUTY POINT						
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s	

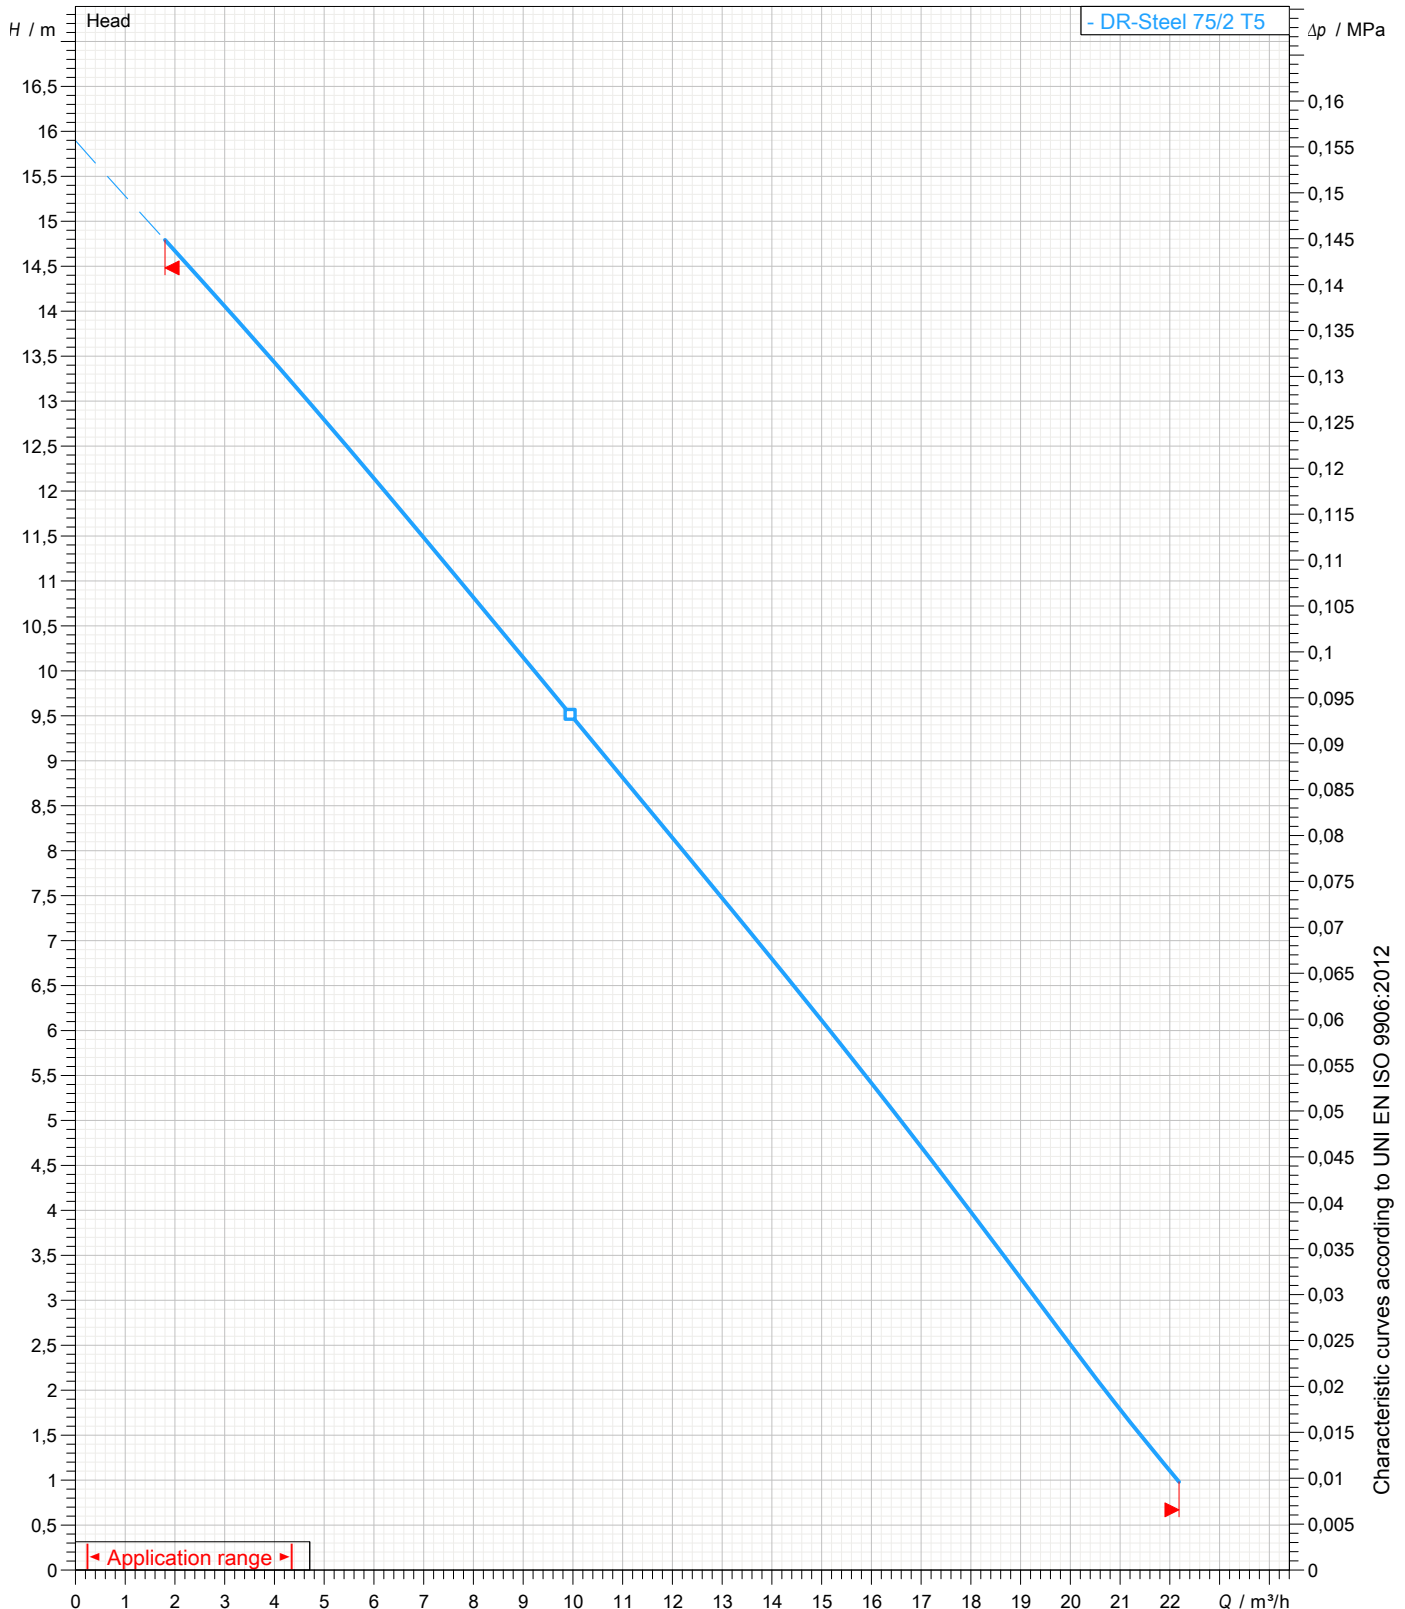



water solutions

Data sheet DR-Steel 75 T5



Steel
series

Dimensional drawing

3~ 50 Hz

Installation type Free Installation
WET/DRY use: WET
Discharge: G 1" 1/2 -
Pressure rating (suction/discharge): -

Suction: -

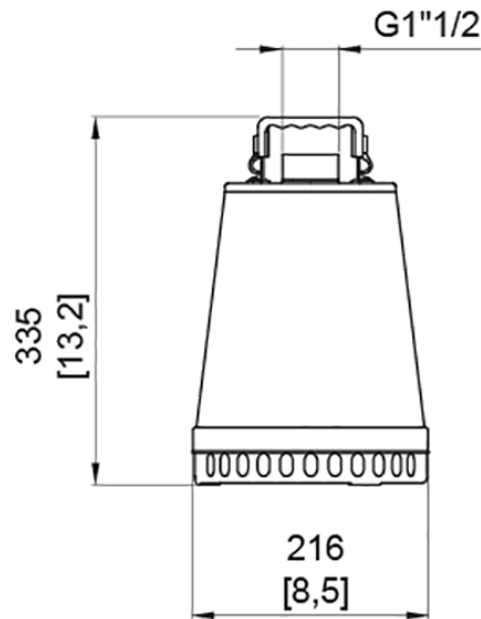

[mm]
[inch]