

SMB30/15SVE01F007/M2/UK

Performance curve

Company name
Contact
Phone number
e-mail address

Operating Data Specification

Flow 0 m³/h
Head 0 m
Static head 0 m

Hydraulic data (duty point)


Flow
Head

Impeller design

Impeller R 105 mm
Frequency 50 Hz
Speed 2900 rpm


Power datas referred to:

Water, pure [100%]; 4°C; 1000kg/m³; 1.57mm²/s
Performance according to ISO 9906:2012 – Grade 3B

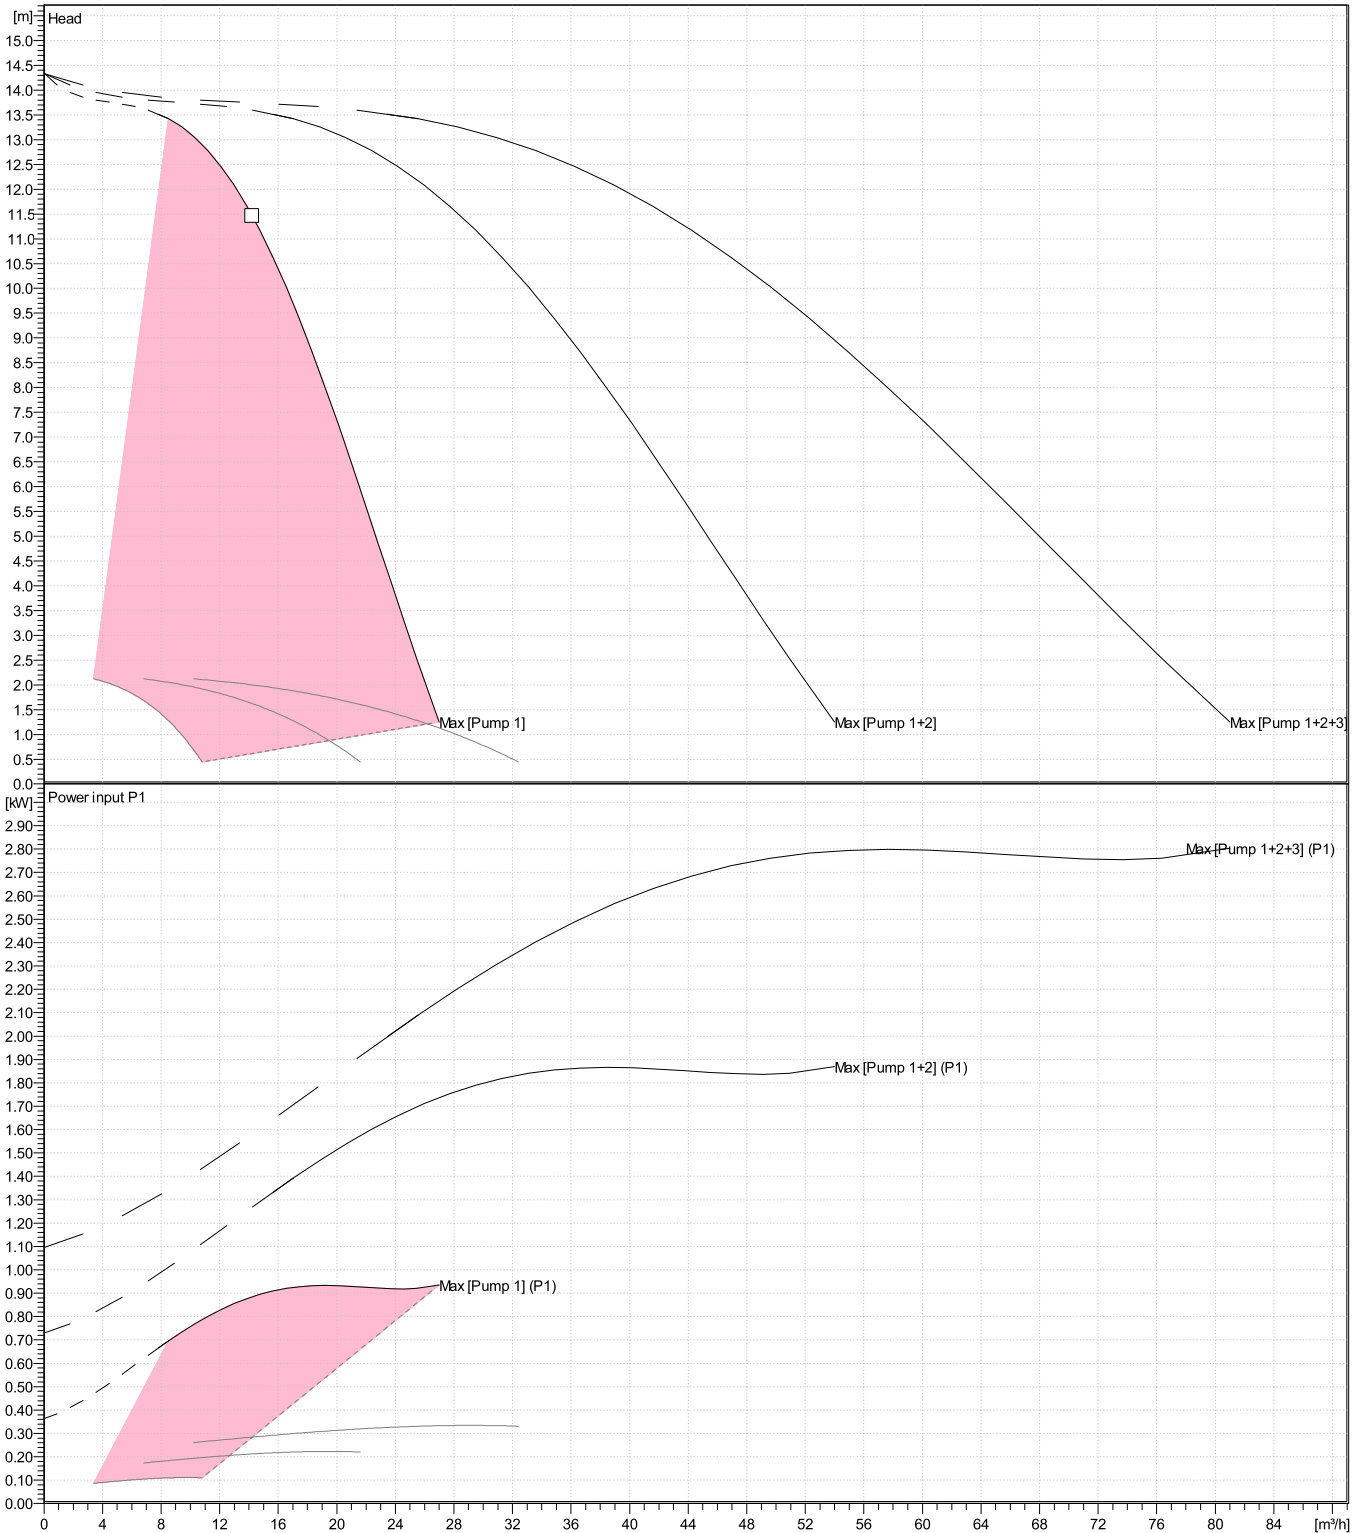

Dimensions

Company name
Contact
Phone number
e-mail address

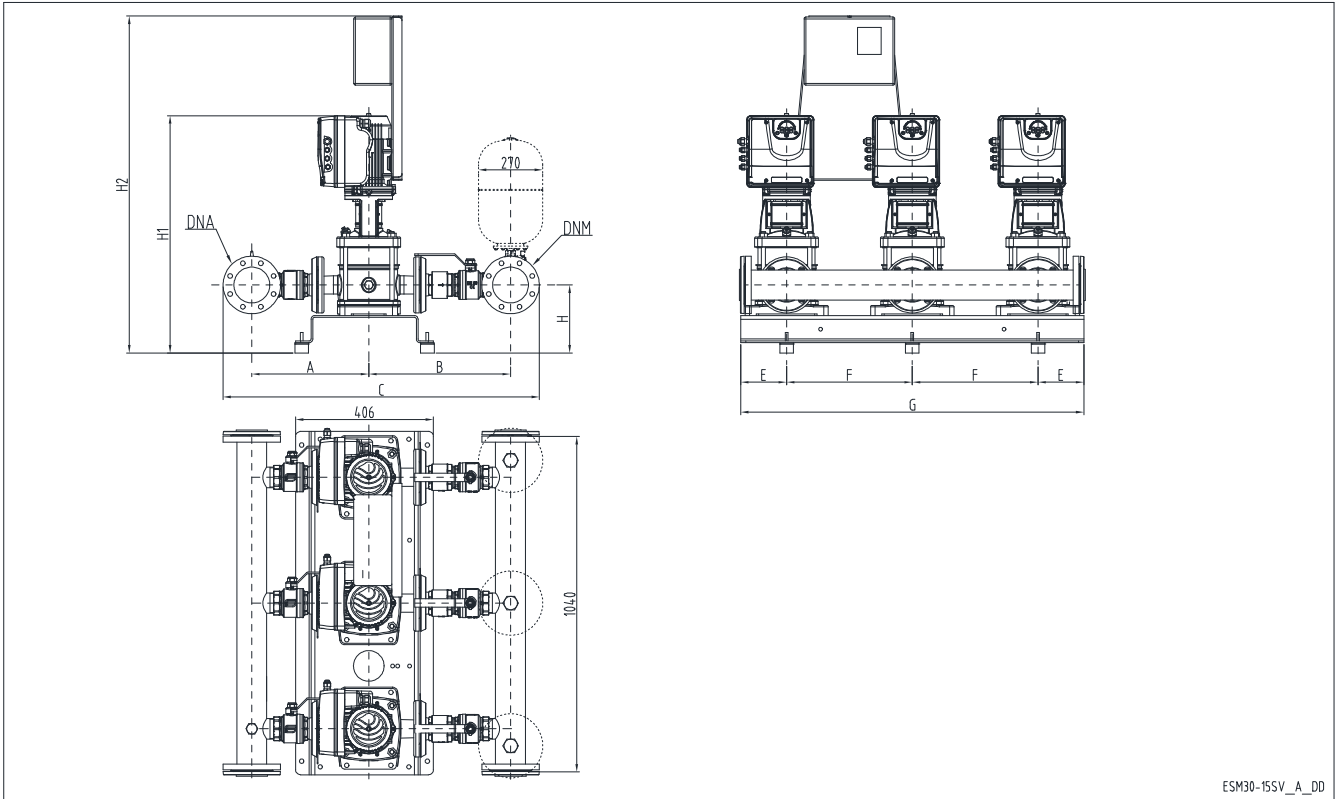

ESM30-15SV_A_DD

PLEASE NOTE:

Dimensions

mm

						Weight (Include external package) On demand
--	--	--	--	--	--	--

Project Xylect-20870836
Block SMB30/15SVE01F007/M2/UK

Created by
Created on 7/18/2023

Last update 7/18/2023

Program version
69.0 - 1505/2023 (Build 33)

Data version
11/07/2023 09:15

User group(s)
Xylem:United Kingdom - EXT