

SMB30/3SVE03F003/T4/UK

Technical data

Company name
Contact
Phone number
e-mail address

| Operating data | | | | | |
|----------------|----------------------------|-------------------|----|---------------------------|--------------------------|
| 1 | Nominal flow | m ³ /h | 0 | Fluid | Water, pure |
| 2 | Nominal head | m | 0 | Operating temperature t A | °C 4 |
| 3 | Static head | m | 0 | pH-value at t A | 7 |
| 4 | Inlet pressure | kPa | 0 | Density at t A | kg/m ³ 1000 |
| 5 | Env ironmental temperature | °C | 20 | Kin. viscosity at t A | mm ² /s 1.569 |
| 6 | Av ailable system NPSH | m | 0 | Vapor pressure at t A | kPa 100 |
| 7 | Solids | | 0 | Altitude | m 0 |
| 8 | | | | | |

| Pump data | | | | | | | |
|-----------|--------------------------------------|----------------|-----------|------------------|----------|-------------------|------|
| 9 | Pump designation | | | Impeller Ø | Max. | mm | |
| 10 | SMB30/3SVE03F003/T4/UK | | | | designed | mm | |
| 11 | Design | Variable speed | | | Min. | mm | |
| 12 | Make | | | Flow | Nominal | m ³ /h | () |
| 13 | | | | | Max- | m ³ /h | 5.2 |
| 14 | Speed | rpm | 2900 | | Min- | m ³ /h | 1.4 |
| 15 | | | | Head | Nominal | m | |
| 16 | Max. working pressure | kPa | 329.3 | | at Qmax | m | 10.8 |
| 17 | Head H(Q=0) | m | 34 | | at Qmin | m | 34.1 |
| 18 | Weight | kg | On demand | Shaft power | kW | () | |
| 19 | Weight data include external package | | | Max. shaft power | kW | 1.2 | |
| 20 | | | | Efficiency | % | | |
| 21 | | | | NPSH 3% | m | | |

| Materials | | Booster | | Motor data | | | |
|-----------|-----------------------|-----------------------------------|--|-----------------|------------------------|----------------------|----------|
| 23 | Manifolds | Stainless steel, 1.4301, AISI 304 | | Manufacturer | Lowara | Electric voltage | 240 V |
| 24 | On-off valves | Nickel-plated brass | | Specific design | Three phase e-SM motor | | |
| 25 | Non-return valves | Brass | | Type | ESM90R/303 SVE | Electric current | 1.83 A |
| 26 | Pressure switches | Galvanized steel/AISI 301 | | Rated power | 0.37 kW | Degree of protection | IP 55 |
| 27 | Pressure transmitters | Stainless steel, 1.4301, AISI 304 | | Speed | 3600 rpm | Insulation class | F |
| 28 | Caps/plugs/flanges | AISI 304 / 316 | | Frame size | 90R | | RAL 5010 |
| 29 | Fittings | AISI 304 / 316 | | Weight | 0 kg | | |
| 30 | Bracket | Galvanized/painted steel | | | | | |
| 31 | Base | Painted steel | | | | | |
| 32 | | | | | | | |

| Standard options | | |
|------------------|--------------------------------|--|
| 33 | Non return valve position | Non return valve in delivery side |
| 34 | Set certificate | |
| 35 | Material Combination | Standard materials combination |
| 36 | Pump Test | Set without certified pumps |
| 37 | High pressure protection | Without high pressure protection on delivery |
| 38 | Turned Delivery Manifold | Standard |
| 39 | Oversize Piping | Standard manifold |
| 40 | Control Panel | Standard |
| 41 | Protection Against Dry Running | Without protection against dry running |
| 42 | Control Devices Oversized | Standard |
| 43 | Delivery Side | Standard delivery |
| 44 | Suction side | Standard suction |
| 45 | Pressure Transmitter | Standard |
| 46 | Control Panel Position | Standard position |
| 47 | Electric Pump Special Seals | Standard |
| 48 | Non-return Valve | Standard non-return valve |

SMB30/3SVE03F003/T4/UK

Performance curve

Company name
Contact
Phone number
e-mail address

Operating Data Specification

Flow 0 m³/h
Head 0 m
Static head 0 m



Hydraulic data (duty point)

Flow
Head

Impeller design


Impeller R 0 mm
Frequency 50 Hz
Speed 2900 rpm

Power datas referred to:
Water, pure [100%]; 4°C; 1000kg/m³; 1.57mm²/s
Performance according to ISO 9906:2012 – Grade 3B

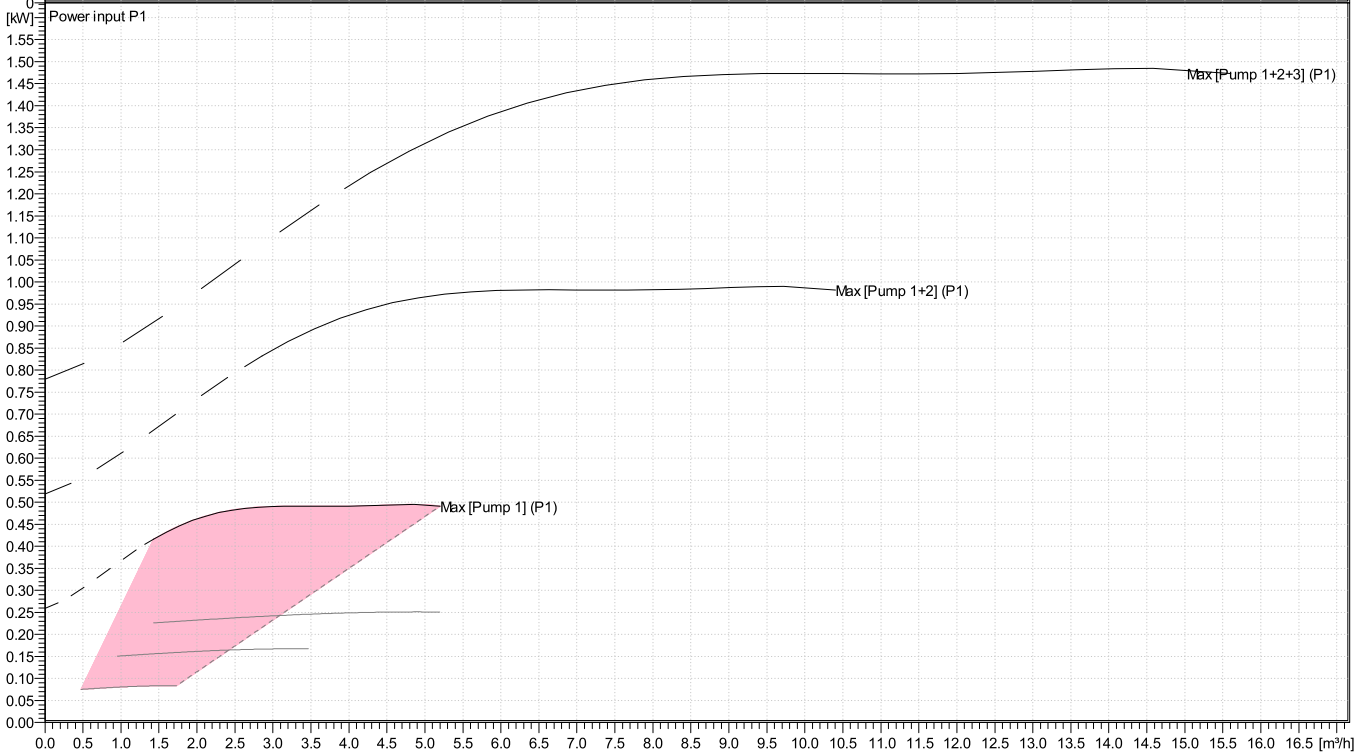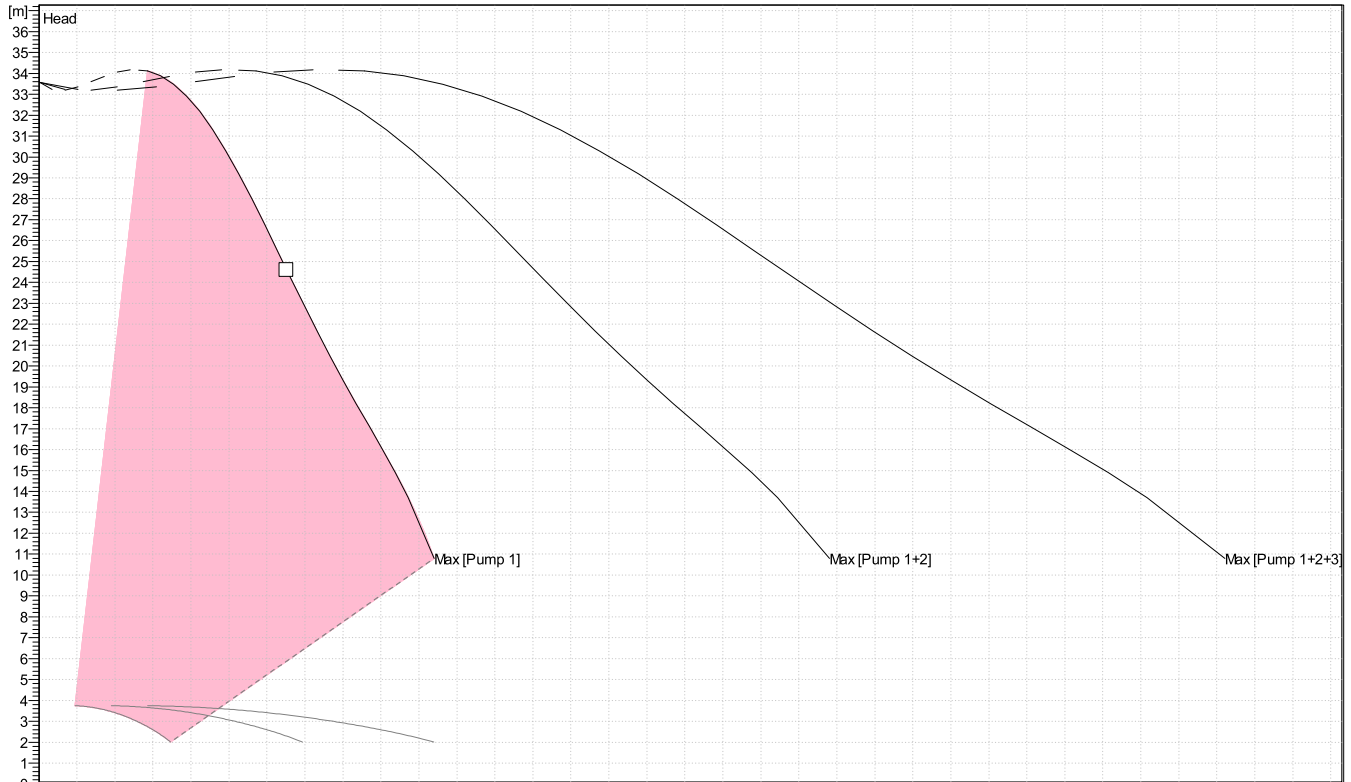

Dimensions

Company name
Contact
Phone number
e-mail address

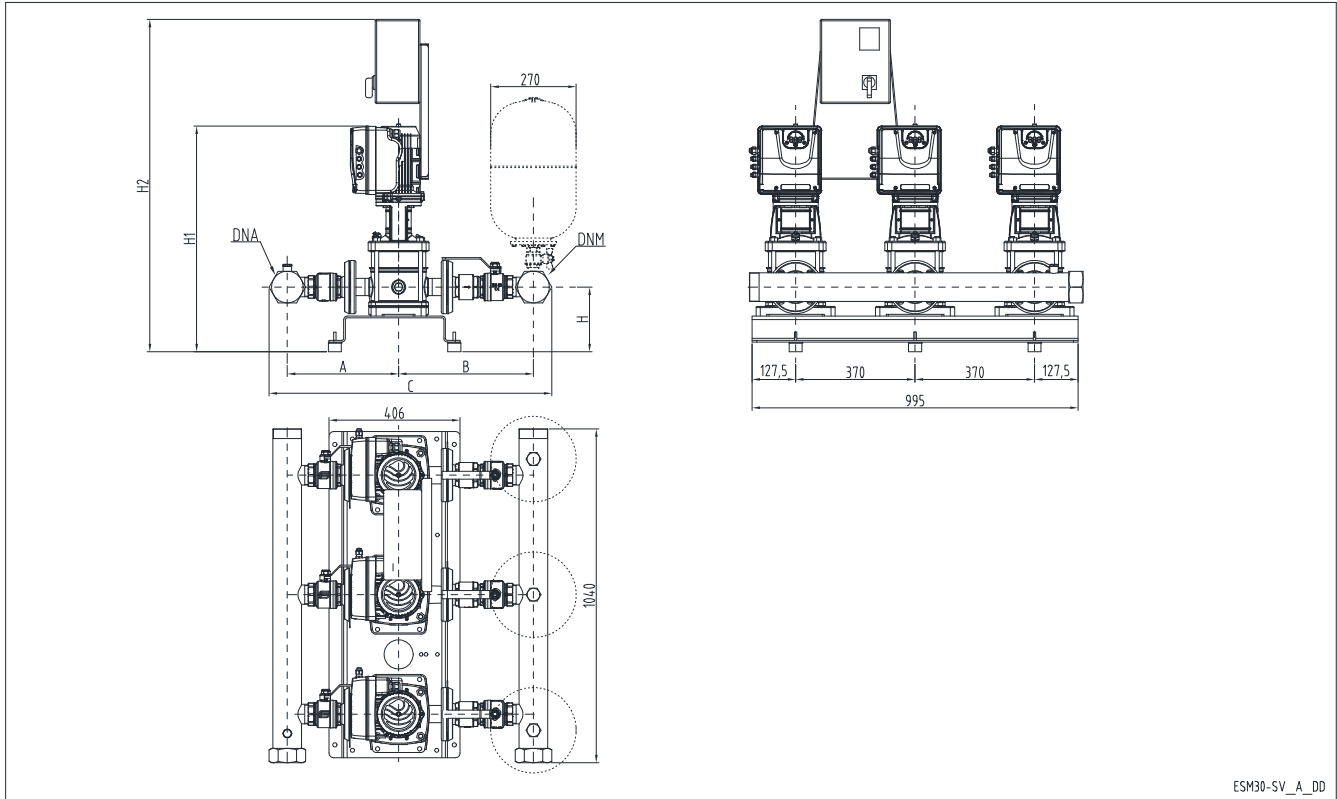

PLEASE NOTE:

Dimensions

mm

| | | | | | | |
|-----|-----|--|--|--|--|--|
| A | 256 | | | | | Weight (Include external package) On demand |
| B | 311 | | | | | |
| C | 627 | | | | | |
| DNA | R2" | | | | | |
| DNM | R2" | | | | | |
| H | 185 | | | | | |
| H1 | 650 | | | | | |
| H2 | 936 | | | | | |

Project Xylect-20871062
Block SMB30/3SVE03F003/T4/UK

Created by
Created on 7/18/2023

Last update 7/18/2023