

# LNEE 50-200/55/P25VCS4

## Technical data

Company name  
Contact  
Phone number  
e-mail address

Operating data						
1	Pumpe type	Single head pump		Fluid	Water, pure	
2	No. of pumps	1		Operating temperature t A	°C	4
3	Nominal flow	m <sup>3</sup> /h	0	Max / Min Operating Temperature mech. Seal	°C	120 / -25
4	Nominal head	m	0	pH-value at t A		7
5	Static head	m	0	Density at t A	kg/m <sup>3</sup>	1000
6	Inlet pressure	kPa	0	Kin. viscosity at t A	mm <sup>2</sup> /s	1.569
7	Environmental temperature	°C	20	Vapor pressure at t A	kPa	100
8	Available system NPSH	m	0	Altitude		0

Pump data							
9	Lubrication	Standard, Grease lubrication [Std]					
10	Execution						
11	Design	In-Line single head			Impeller Ø	Max. mm	199
12	Operating speed	2900 rpm	Stages	1		designed mm	165
13	Suction nozzle	DN 50 /	PN 16 /	EN1092-2		Min. mm	165
14	Discharge nozzle	DN 50 /	PN 16 /	EN1092-2	Flow	Nominal m <sup>3</sup> /h	
15	Max. casing pressure	kPa				Max- m <sup>3</sup> /h	45
16	Max. working pressure	kPa	342.6		Min- m <sup>3</sup> /h	12	
17	Impeller type	Radial impeller			Head	Nominal m	
18	Head H(Q=0)	m	35			at Qmax m	24.3
19	Max. shaft power	kW	5.5			at Qmin m	35.1
20	Pump weight	kg			Shaft power	kW	
21	Total weight	kg	76.0		Efficiency	%	
					NPSH 3%	m	

Materials						
22		Pump			Shaft Seal	
23	Volute Casing	Cast iron			Single mechanical seal, without shaft sleeve	
24	Casing Cover	Cast iron			eMG12 - Ø22mm	BQ7EGG-WA
25	Impeller	Stainless steel / AISI 304			Mechanical seal diameter	22 mm
26	Stub shaft	Stainless steel / AISI 316L			1. Rotating ring	Carbon graphite resin impregnated
27	Wear ring	Stainless steel / AISI 304			2. Stationary ring	SiC, silicon carbide, sintered press.less
28	Impeller lock nut and washer	Stainless steel / AISI 304			3. Secondary seal	Ethylene propylene rubber (EPDM)
29	Impeller key	Stainless steel / AISI 316L			4. Springs	CrNiMo - Steel
30	Fill and drain plugs	Nickel-plated brass			5. Others	EPDM - WRAS
31					Gaskets of the pump	Ethylene propylene rubber (EPDM)
32						
33						
34						
35						
36						
37						
38						
39						
40						
41						

Motor data					
Electrical and dimensional data refer to IE3 motor					
42	Manufacturer	Lowara			
43	Specific design	IE3 3ph Flange Motor			
44	Type	PLM 112 B14 5,5 kW			
45	Rated power	5.5 kW	Rated current	10.4 A	
46	Nominal speed	2880 rpm	Rated voltage	400 V	
47	Frame size	112	Service factor	1	
48	Weight	kg 55.8	Degree of protection	IP55	

Remarks					
49					
50					
50					
52					

# LNEE 50-200/55/P25VCS4

## Performance curve

Company name  
Contact  
Phone number  
e-mail address


	Ø mm	Pump capacity			Pump head		Shaft power P2			Frequency		Hz	50
		Operating range Min. m³/h	Max. m³/h	η Max. m³/h	H(Q=0) m	η Max. m	P2(Q=0) kW	Max. kW	η Max. kW	Operating speed rpm	2900		
actual	165	12	45	34.7	34.9	30.5	5.5	4.87		Nominal flow	m³/h	0	
Min.	0	/	/	34.7	34.9	30.5	/	4.87		Nominal head	m	0	
Max.	199	/	/	46.4	55	46.6	/	9.38		Inlet pressure	kPa	0	
										Static head	m	0	

**Power datas referred to:**

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

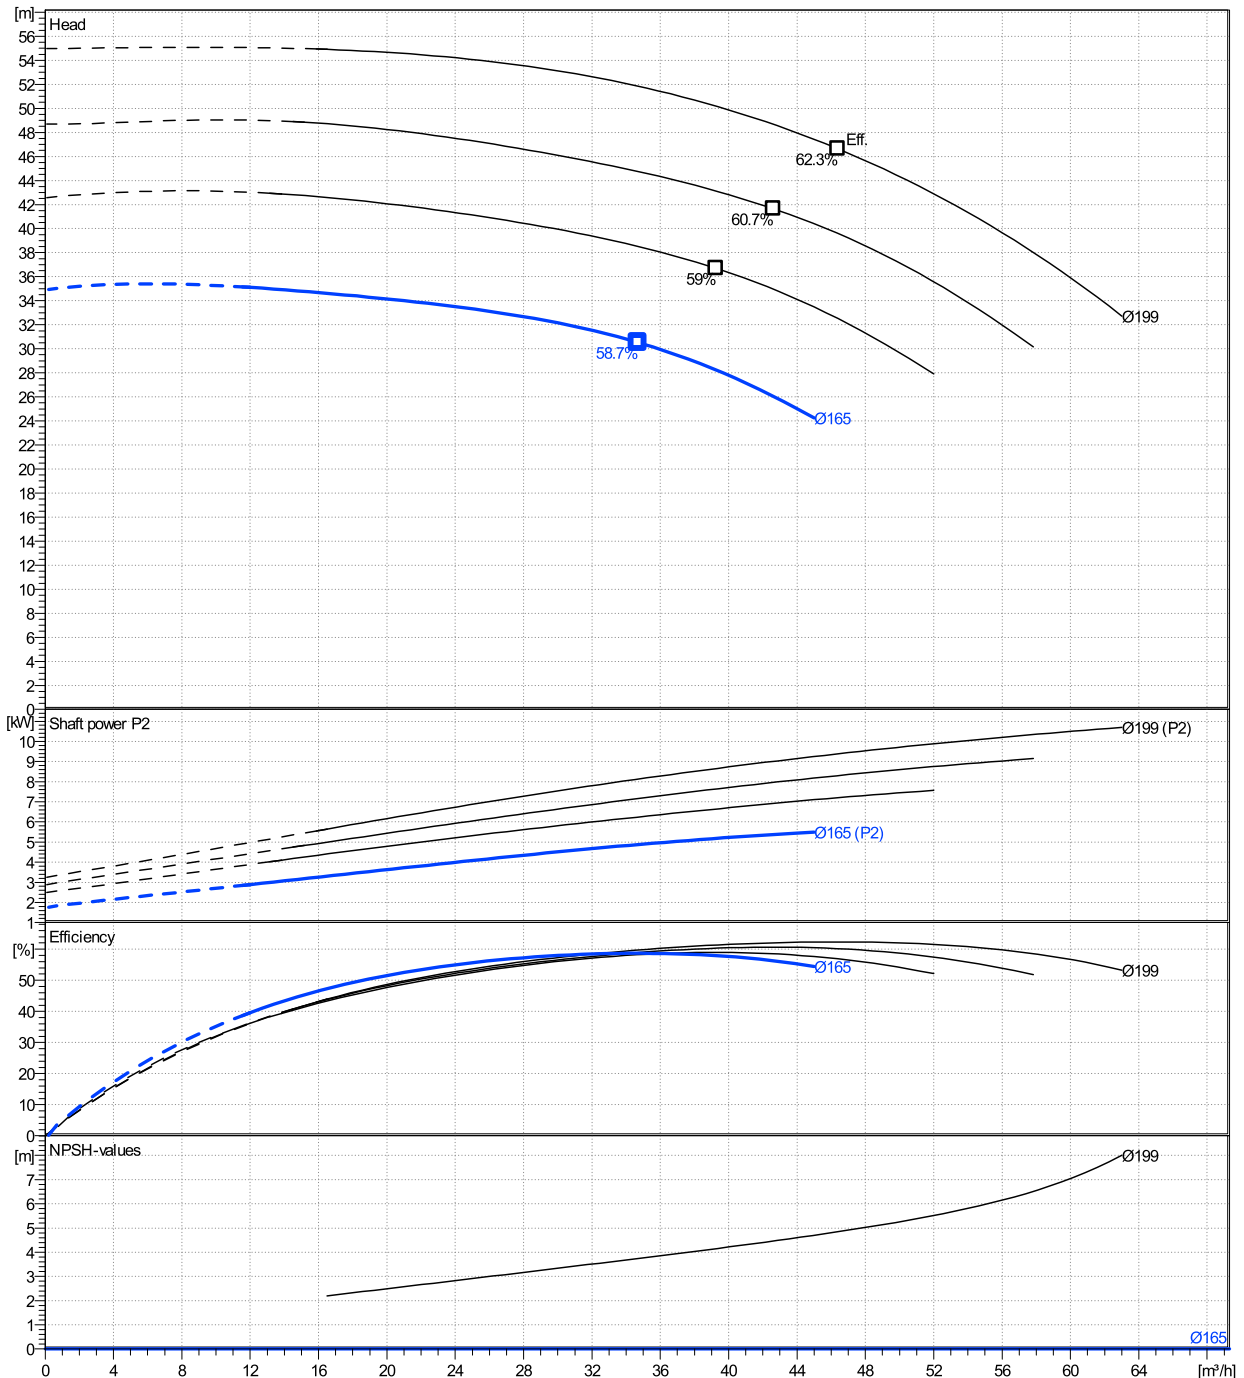

# LNEE 50-200/55/P25VCS4

## Dimensions

Company name  
Contact  
Phone number  
e-mail address

Close coupled


PLM 112 B14 5,5 kW

Electrical and dimensional data refer to IE3 motor

Dimensions		[ mm ]	
AD	168		
b1	168		
Bmax	336		
DND	50		
DNS	50		
e	111		
H	440		
h1	220		
h2	220		
L	564		
p	214		
x	108		

Weight	
Total weight	76 kg

Connections			
<b>Suction nozzle</b>		<b>Discharge nozzle</b>	
DN 50		DN 50	
PN 16		PN 16	
EN1092-2		EN1092-2	
C	20	C	20
D	165	D	165
df	99	df	99
DN	50	DN	50
K	125	K	125
L	4 x 19	L	4 x 19



Value C, D may vary from Standard

### Dimensions and weight without obligation

Project	Xylect-20945270	Created by		Last update	8/2/2023
Block	LNEE 50-200/15/P45RCS4	Created on	8/2/2023		