

LNEE 80-160/75/P25VCC4

Technical data

Company name
Contact
Phone number
e-mail address

Operating data				
1	Pumpe type	Single head pump	Fluid	Water, pure
2	No. of pumps	1	Operating temperature t A	°C 4
3	Nominal flow	m ³ /h 0	Max / Min Operating Temperature mech. Seal	°C 120 / -25
4	Nominal head	m 0	pH-value at t A	7
5	Static head	m 0	Density at t A	kg/m ³ 1000
6	Inlet pressure	kPa 0	Kin. viscosity at t A	mm ² /s 1.569
7	Environmental temperature	°C 20	Vapor pressure at t A	kPa 100
8	Available system NPSH	m 0	Altitude	0

Pump data				
9	Lubrication	Standard, Grease lubrication [Std]		
10	Execution			
11	Design	In-Line single head		
12	Operating speed	2900 rpm	Stages	1
13	Suction nozzle	DN 80 /	PN 16 /	EN1092-2
14	Discharge nozzle	DN 80 /	PN 16 /	EN1092-2
15	Max. casing pressure	kPa		
16	Max. working pressure	kPa	277.8	
17	Impeller type	Radial impeller		
18	Head H(Q=0)	m	28	
19	Max. shaft power	kW	7.3	
20	Pump weight	kg		
21	Total weight	kg	103.0	

		Impeller Ø	Max.	mm	180
			designed	mm	145
			Min.	mm	130
			Nominal	m ³ /h	
		Flow	Max-	m ³ /h	126
			Min-	m ³ /h	25.2
			Nominal	m	
		Head	at Qmax	m	13.7
			at Qmin	m	27.9
		Shaft power		kW	
		Efficiency		%	
		NPSH 3%		m	

Materials				
22		Pump		Shaft Seal
23	Volute Casing	Cast iron		Single mechanical seal, without shaft sleeve
24	Casing Cover	Cast iron		eMG12 - Ø28mm
25	Impeller	Cast iron / ASTM Class 30		Mechanical seal diameter
26	Stub shaft	Stainless steel / AISI 316L		28 mm
27	Wear ring	Stainless steel / AISI 304		1. Rotating ring
28	Impeller lock nut and washer	Stainless steel / AISI 304		Carbon graphite resin impregnated
29	Impeller key	Stainless steel / AISI 316L		2. Stationary ring
30	Fill and drain plugs	Nickel-plated brass		SiC, silicon carbide, sintered press. less
31				3. Secondary seal
32				Ethylene propylene rubber (EPDM)
33				4. Springs
34				CrNiMo - Steel
35				5. Others
36				EPDM - WRAS
37				Gaskets of the pump
38				Ethylene propylene rubber (EPDM)
39				
40				
41				

Motor data				
Electrical and dimensional data refer to IE3 motor				
42	Manufacturer	Lowara		
43	Specific design	IE3 3ph Flange Motor		
44	Type	PLM 132 B14 7,5 kW		
45	Rated power	7.5 kW	Rated current	14.1 A
46	Nominal speed	2920 rpm	Rated voltage	400 V
47	Frame size	132	Service factor	1
48	Weight	kg 55.8	Degree of protection	IP55

Remarks				
49				
50				
50				
52				

LNEE 80-160/75/P25VCC4

Performance curve

Company name
Contact
Phone number
e-mail address


	Ø mm	Pump capacity			Pump head		Shaft power P2			Frequency	Hz
		Operating range Min. m³/h	Max. m³/h	η Max. m³/h	H(Q=0) m	η Max. m	P2(Q=0) kW	Max. kW	η Max. kW	Operating speed	rpm
actual	145	25.2	126	89.2	28.3	21	7.33	6.81	Nominal flow	m³/h	0
Min.	0	/	/	78.7	22.9	16.7	/	4.94	Nominal head	m	0
Max.	180	/	/	113	46.6	36.9	/	14.4	Inlet pressure	kPa	0
									Static head	m	0

Power datas referred to:

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

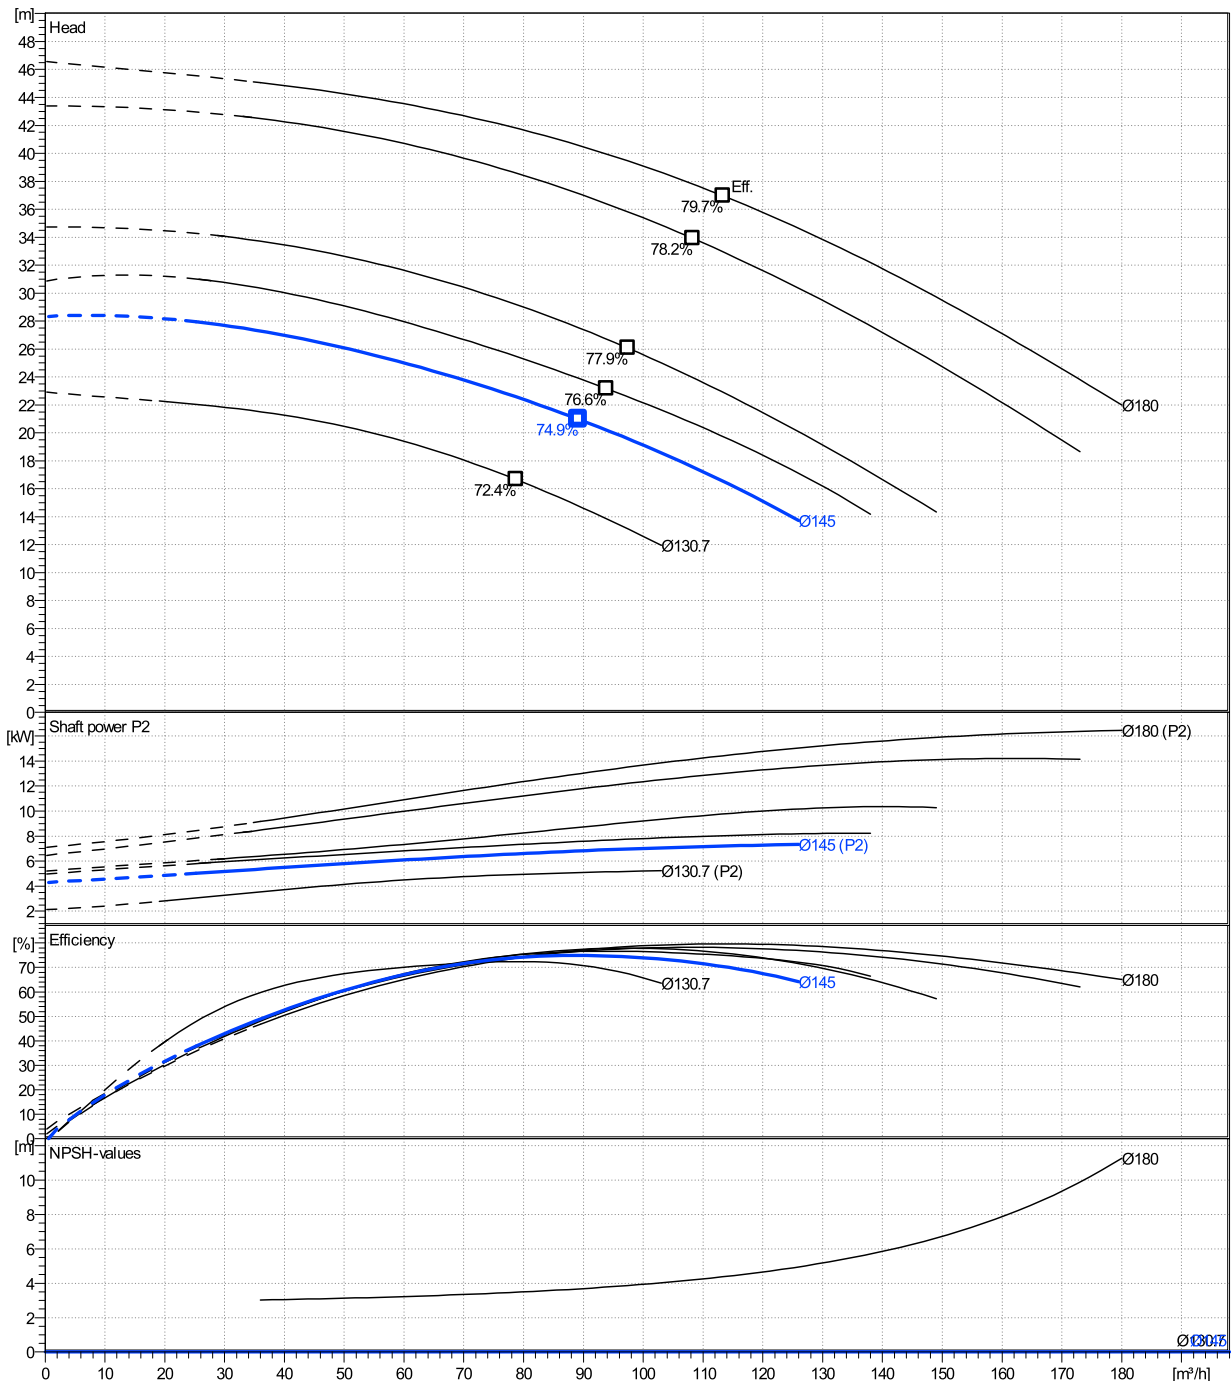

LNEE 80-160/75/P25VCC4

Dimensions

Company name
Contact
Phone number
e-mail address

Close coupled


PLM 132 B14 7,5 kW

Electrical and dimensional data refer to IE3 motor

Dimensions		[mm]	
AD	191		
b1	168		
Bmax	359		
DND	80		
DNS	80		
e	114		
H	420		
h1	215		
h2	205		
L	596		
p	256		
x	111		

Weight	
Total weight	103 kg

Connections			
Suction nozzle		Discharge nozzle	
DN 80		DN 80	
PN 16		PN 16	
EN1092-2		EN1092-2	
C	22	C	22
D	200	D	200
df	132	df	132
DN	80	DN	80
K	160	K	160
L	8 x 19	L	8 x 19

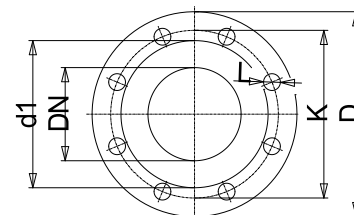

Value C, D may vary from Standard

Dimensions and weight without obligation

Project	Xylect-20945460	Created by		Last update	8/2/2023
Block	LNEE 80-160/22/P45RCC4	Created on	8/2/2023		