

Customer	Date	12/17/2020
Contact	Project	
Phone number	Project no.	
Email		

15SV09N075T

1016LD484

Operating data

Pump type	Single head pump	Fluid	Water, pure
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	l/s 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m ³ 1000
Static head	m 0	Kin. viscosity at t A	mm ² /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

Pump data

Make	Lowara	Nominal	l/s ()
Speed	rpm 2900	Flow	Max- l/s 6.7
Number of stages	9		Min- l/s
Max. casing pressure	kPa		Nominal m
Max. working pressure	kPa 1293.4	Head	at Qmax m 67.4
Head H(Q=0)	m 130		at Qmin m 131.9
Weight	kg 90	Shaft power	kW ()
	Max. mm 105	Max. shaft power	kW 7.1
Impeller R	designed mm 105	Efficiency	%
	Min. mm 105	NPSH 3%	m

Pump Materials

Pump body	Stainless steel / AISI 316L
Impeller	Stainless steel / AISI 316L
Diffuser	Stainless steel / AISI 316L
Outer sleeve	Stainless steel / AISI 316L
Shaft	Stainless steel / AISI 316
Adapter	Cast iron
Base	Aluminium
Coupling	Aluminium
SEAL HOUSING	Stainless steel / AISI 316L
Coupling protection	Stainless steel / AISI 304
Shaft sleeve and bushing	Tungsten carbide
Fill / drain plugs	Stainless steel / AISI 316
Tie rods	Stainless steel / AISI 431
Wear Ring	Technopolymer PPS

Shaft Seal

e-SV Mechanical seal	Roten
e-SV - Uniten (-30 / +120 °C)	
1 - Rotating part	Silicon Carbide
2 - Stationary part	Resin impregnated carbon
3 - Elastomers	EPDM
4 - Springs	AISI 316
5 - Other components	AISI 316

Motor data

Manufacturer	Lowara	Electric voltage	400 V	Speed	2935 rpm	Insulation class	155 (F)
Specific design	IE3 Three phase surface motor (e-SV)			Frame size	132	Colour	RAL 5010
Type	PLM132B5/375 E3 (220-240/380-415V)						
Rated power	7.5 kW	Degree of protection	IP55				
Electric current	14.1 A						

Remarks:

Customer	Date	12/17/2020
Contact	Project	
Phone number	Project no.	
Email		


15SV09N075T

1016LD484

Hydraulic data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 l/s	Flow		Impeller R	105 mm
Head	0 m	Head		Frequency	50 Hz
Static head	0 m	MEI >=0,7		Speed	2900 rpm


Power data referred to:
 Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s
 Performance according to ISO 9906:2012 – Grade 3B

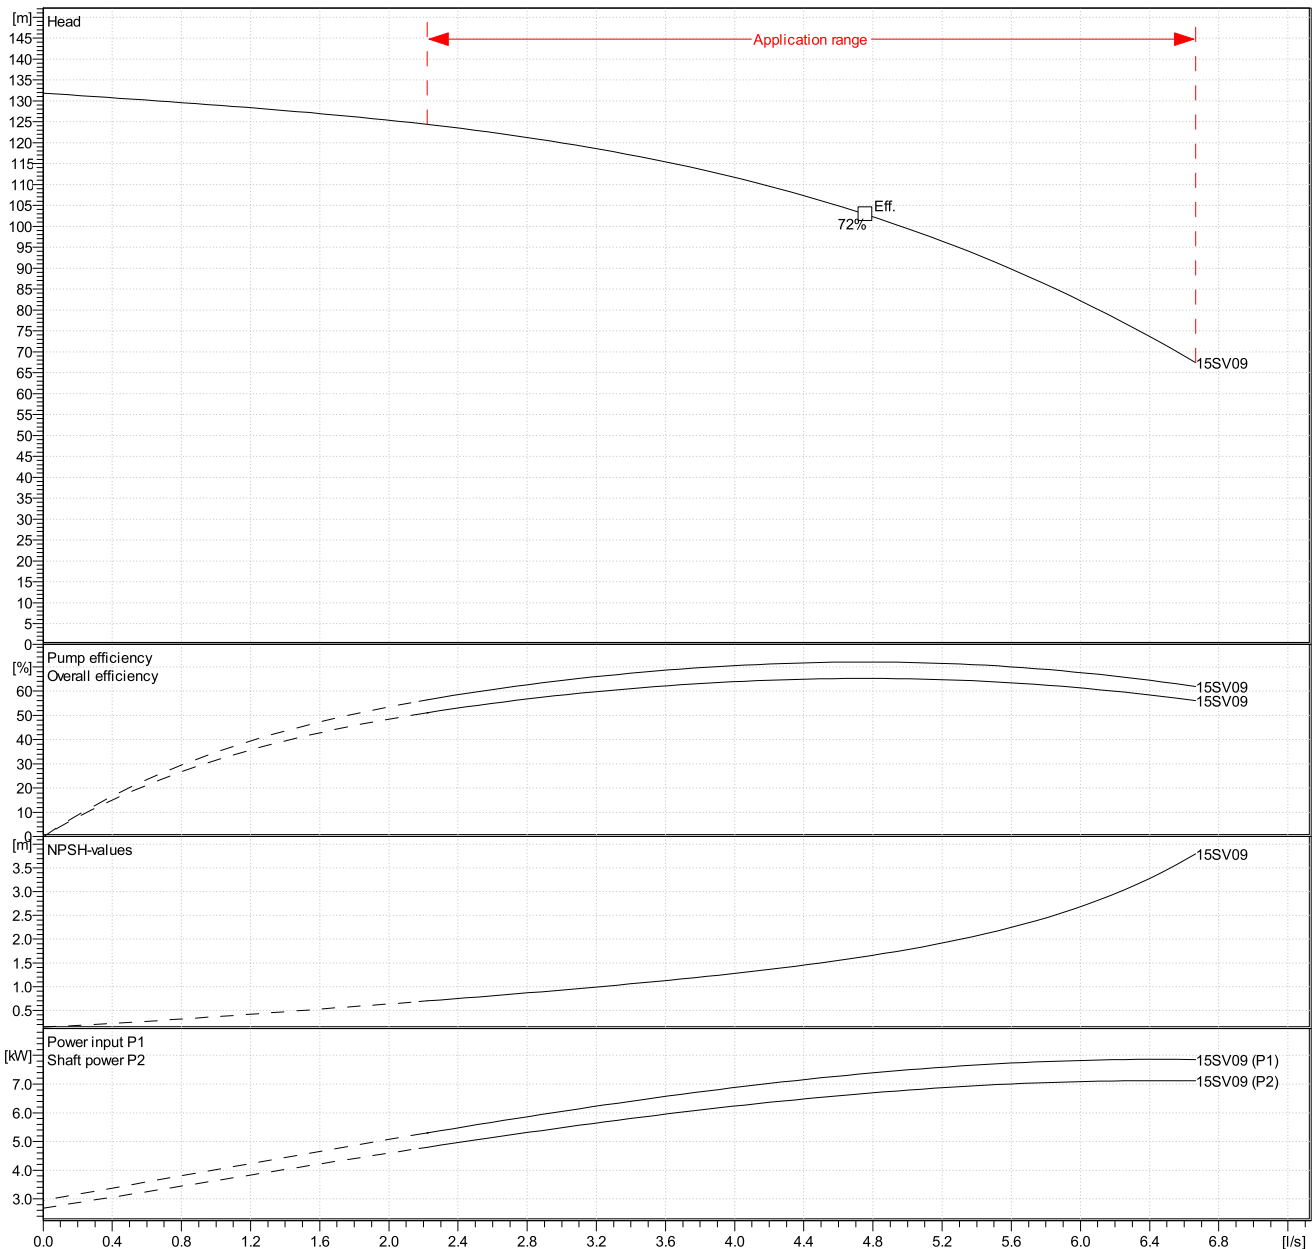

Customer	Date	12/17/2020
Contact	Project	
Phone number	Project no.	
Email		

15SV09N075T
1016LD484

Drawing

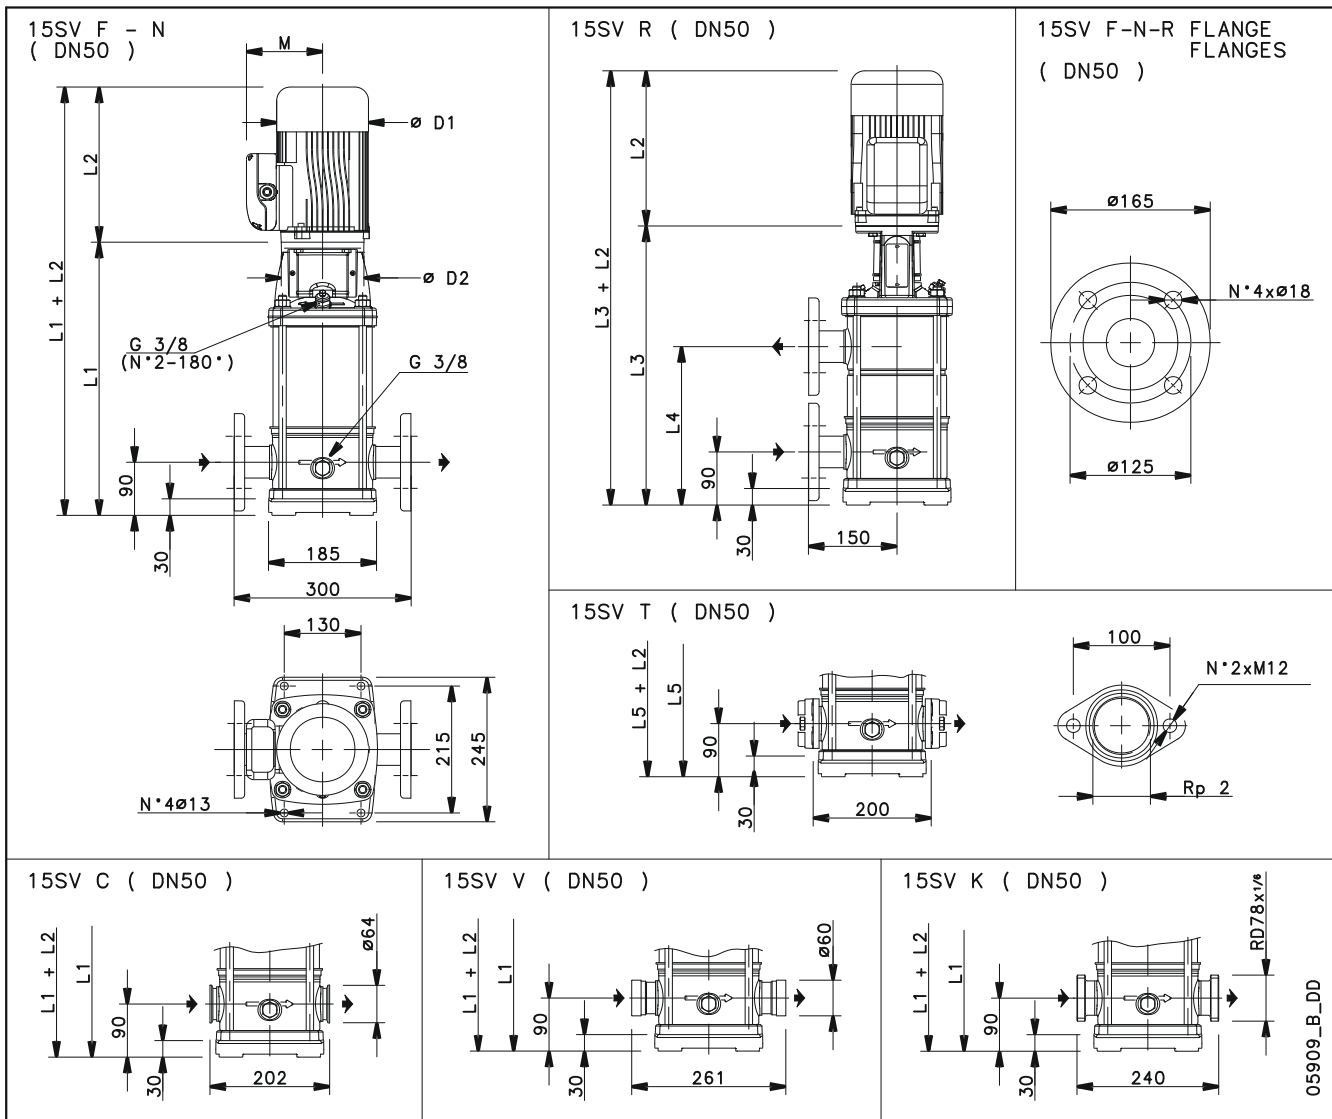

Dimensions mm

D1	256					Weight 90 kg
D2	300					
L1	822					
L2	367					
L3	822					
L4	541					
L5	822					
M	191					

05909_B_DD